
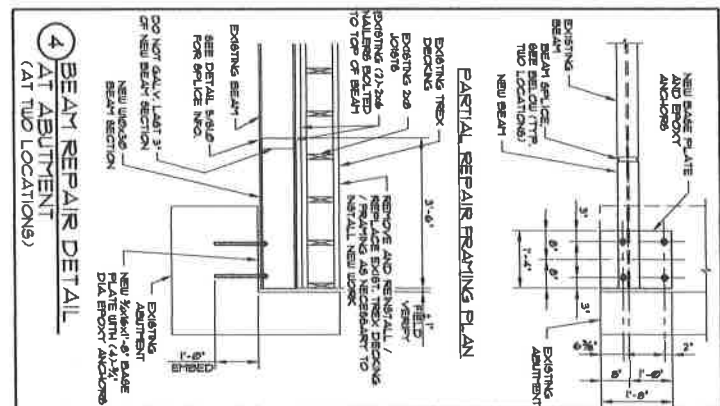
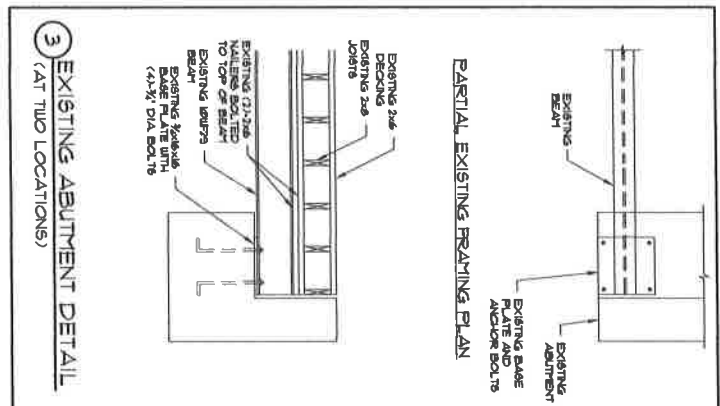
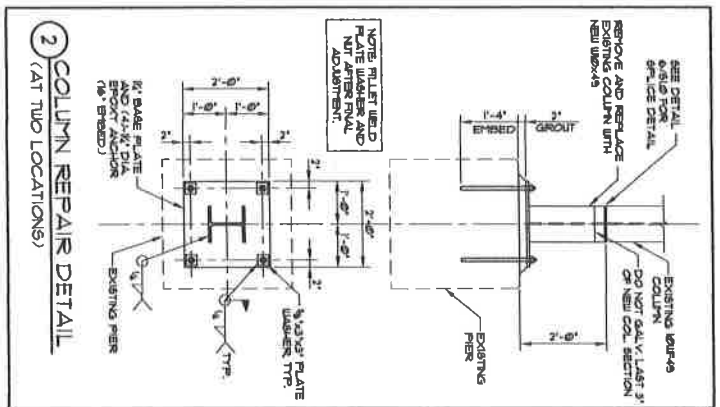


Scope of Work Burgess Falls State Park

1. All work is to be done according to the attached drawings. By Skyhook Structural, Engineering P.C. Job # 11014 Date 10/9/15 Title Burgess Falls Main Overlook Repairs.
2. Contractor is to remove all trash, debris, or any other material from the premises and disposed of off park grounds.
3. The contractor will provide adequate safety measures for all park personnel, park visitors, and the personnel of the contractor at all times.
4. The Contractor will be responsible to repair or replace any damages done to the interior of the building, phone lines existing sewer line, water lines at no cost to the state.
5. Contractor is to furnish a 1 year warranty of workmanship upon final inspection and acceptance by the State of Tn.
6. Contractor will start 14 days after PO#& 30 Days to complete.

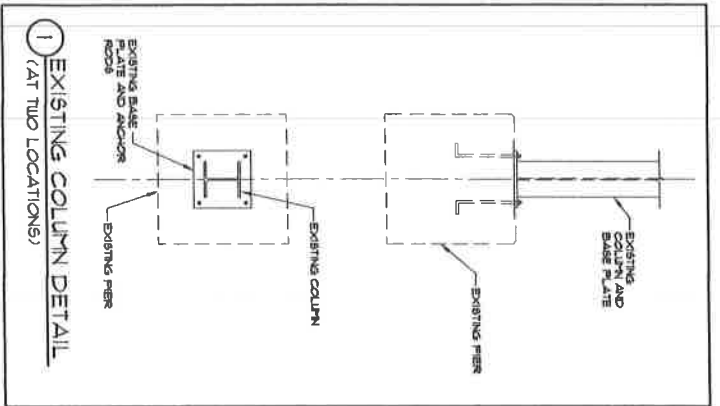

GENERAL

- THE CONTRACTOR SHALL VERIFY ALL EXISTING AND NEW CONDITIONS BEFORE BEGINNING WORK. ANY DISCREPANCIES BETWEEN THE CONTRACT DOCUMENTS AND THE ACTUAL CONDITIONS SHALL BE REPORTED TO THE ARCHITECT IMMEDIATELY.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION, REPAIR AND MAINTENANCE OF ALL EXISTING UTILITIES, STRUCTURES, AND EQUIPMENT. ANY DAMAGE TO EXISTING UTILITIES, STRUCTURES, OR EQUIPMENT SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION, REPAIR AND MAINTENANCE OF ALL EXISTING UTILITIES, STRUCTURES, AND EQUIPMENT. ANY DAMAGE TO EXISTING UTILITIES, STRUCTURES, OR EQUIPMENT SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.

STRUCTURAL STEEL

- ALL STRUCTURAL STEEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE AISC TYPICAL OF STEEL CONSTRUCTION, 13TH EDITION.
- ALL NEW STEEL BEAMS, COLUMNS, AND CONNECTIONS SHALL BE GALVANIZED OR PAINTED WITH A MINIMUM OF 10 MILS OF ZINC RICH PAINT.
- ALL EXISTING STEEL BEAMS, COLUMNS, AND CONNECTIONS SHALL BE GALVANIZED OR PAINTED WITH A MINIMUM OF 10 MILS OF ZINC RICH PAINT.

