

WE HAVE AN
ATTACHMENT
FOR THAT.®



INTRO

*Insist on genuine
Bobcat attachments.*

Bobcat: the World's Leading Attachment Manufacturer

We offer the most attachments in the industry. Attachments transform your Bobcat® power unit into an equipment combination that saves time, reduces labor and generates income. They're backed by Bobcat dealers that provide quality parts, service and support.

MATCHED TO YOUR MACHINE

Built to match the specifications of your Bobcat machine, from electronics to hydraulics and geometry, our attachments and implements are more versatile, fully tested and ready for the job. Grapple tines won't hit your coupler, and your bucket heel height matches the intended machine. Many attachments can be used on multiple carriers, maximizing your versatility.

SUPERIOR DESIGN

Our engineering teams work together to ensure that Bobcat attachments deliver maximum performance when paired with Bobcat machines. Using Finite Element Analysis, Bobcat engineers virtually pinpoint high-stress areas, enhancing and testing them to improve durability.

EASY TO OPERATE

Bobcat machines provide easy and intuitive attachment controls. Most machines offer fingertip controls, delivering hydraulic and electric-over-hydraulic functions that don't require you to remove your hands from the controls during attachment operation. Smart electronics protect your machine and attachment from damage by locking out high flow when necessary, or make you more efficient by activating high flow automatically.



COMPARE BOBCAT ATTACHMENTS AGAINST OTHER BRANDS.

Check out the latest chapter in the Bobcat Advantage series. Compare the toughest brand of attachments for compact equipment with the others by scanning the QR codes inside this catalog.

BACKED BY A ONE-YEAR WARRANTY

For even greater peace of mind, Bobcat gives you a one-year warranty on the majority of our attachments. We stand behind the materials and workmanship on all attachment components – and they are backed by the best dealer service and support.

BUILT TOUGHER WITH STATE-OF-THE-ART MANUFACTURING

Each year, Bobcat builds tens of thousands of attachments. This leads to greater precision, proven manufacturing processes and higher quality. Robotic welding delivers better penetration and more accurate welds, leading to greater attachment durability. Many attachments have standard hydraulic hoses rated to 3,500 psi. Better protection includes guards, fewer exposed hoses and steel tubing. Electrical components are encapsulated in polyurethane material for protection from water, heat, cold, dust, vibration and chemicals. Plated with the best materials and covered in high-quality paint to protect your investment, your attachment retains its performance, structural integrity and appearance job after job.

For more information

We have an ATTACHMENT FOR THAT®



COMPACT EXCAVATOR ATTACHMENTS

AUGER	2	FLAIL MOWER	7	RIPPER	12
BUCKET	4	HYDRAULIC BREAKER	8	SWING ACCESSORIES	12
BUCKET ACCESSORIES	5	PACKER WHEEL	10	3-TINE GRAPPLE	12
CLAMP	11	PLATE COMPACTOR	10	TRENCHER	13
DEPTH CHECK SYSTEM	6	PRO CLAMP™ SYSTEM	11	VH TRUSS BOOM*	13

LOADER ATTACHMENTS

ANGLE BROOM	16	GRADER BLADE	40	SPREADER	66
AUGER	18	HYDRAULIC BREAKER	42	STABILIZER	68
BACKHOE	20	INDUSTRIAL GRAPPLE	44	STEEL TRACKS	68
BALE FORK	21	LANDSCAPE RAKE	46	STUMP GRINDER	68
BORING UNIT	22	LANDPLANE	47	SWEeper BROOM	70
BOX BLADE	22	MOWER	48	3 PT. HITCH ADAPTER	72
BRUSHCAT™ ROTARY CUTTER	24	PALLET & HYDRAULIC FORK	50	TILLER	72
BRUSH SAW	25	PLANER	52	TREE SPADE	74
BUCKET	26	ROOT GRAPPLE	54	TRENCHER	76
BUCKET ACCESSORIES	28	SCARIFIER	56	TRENCH COMPACTOR	78
CHIPPER	30	SCRAPER	56	UTILITY FORK	78
COMBINATION BUCKET	30	SEEDER	56	UTILITY GRAPPLE	80
CONCRETE MIXER	32	SILT FENCE INSTALLER	56	VIBRATORY PLOW	82
CONCRETE PUMP	32	SNOW ACCESSORIES	57	VIBRATORY ROLLER	82
DIGGER	32	SNOWBLOWER	58	WATER KIT	83
DOZER BLADE	33	SNOW BLADE	60	WHEEL SAW	83
DROP HAMMER	34	SNOW BUCKET	61		
DUMPING HOPPER	34	SNOW PUSHER	62		
FLAIL CUTTER	35	SNOW V-BLADE	62		
FORESTRY CUTTER	36	SOD LAYER	63		
GRADER AUTOMATION	38	SOIL CONDITIONER	64		

NOTE: Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

*Not an excavator attachment



AUGER

You can dig deeper and faster – even in hard, rocky soil – with the Bobcat® auger attachment.

MORE DEPTH

Bobcat augers have drive units that follow the bit into the hole. They give you up to an extra foot of dig depth comparable to units from other manufacturers.

DIRECT OR PLANETARY DRIVE

The direct-drive models give you excellent torque and rpm for reliable digging performance in many soil conditions. Direct drives also require less maintenance.

Planetary drive augers deliver the extra power and torque necessary for anchor applications and extreme ground conditions, including rock, shale, clay or frost.

BOB-TACH VERSATILITY

The Bob-Tach® mounting system allows you to quickly and easily use the auger on multiple carriers, from loaders and compact excavators to the Toolcat™ utility work machine or VersaHANDLER® telescopic tool carrier.



EXCLUSIVE

COMBINATION HEX AND ROUND OUTPUT SHAFT

Available on models 15C and 30C, this output shaft accepts more types of bits for more types of digging.

BITS AND TEETH

Match the tool to the job: light-duty, heavy-duty and rock auger bits are available, with diameters from 6 to 42 inches.



UNIQUE KNUCKLE JOINT DESIGN

The knuckle joint enables the auger to dig vertical holes even if your Bobcat unit is on uneven terrain.



DIG HOLES FASTER AND DEEPER.



DIGGING DEPTH CHALLENGE

Watch our online video to compare augers.

More auger video comparisons:

• Torque Challenge

• Maintenance Challenge

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information

AUGER



Model	Torque	Speed	Recommended Uses	Depth*
Model 10	Low	High	Areas with relatively easy digging or loose soils. Up to 24-in. diameter bits.	58 in.
Model 15C/15H	Med	Med	Moderate to heavy digging requirements, rocky soil and occasional tough digging. Up to 36-in. diameter bits.	62 in.
Model 30C/30H	High	Low	Hard, tough, all-day digging through hardpan, frost or asphalt. Ideal for large diameter bits and hex drive applications.	62 in.
Model 35/50 PH	High	Low	Extreme ground conditions like rock, shale, clay or frost. Ideal for anchor applications.	75 in.

* Digging depth without extension

Direct Drive Auger	MODEL 10	MODEL 15C/15H	MODEL 30C/30H
Housing			
Length	8.40 in. (214 mm)	10.60 in. (269 mm)	10.60 in. (269 mm)
Width	9.20 in. (233 mm)	10.20 in. (260 mm)	10.20 in. (260 mm)
Clearance Diameter of Drive Unit	10.00 in. (254 mm)	12.00 in. (305 mm)	12.00 in. (305 mm)
Weight	140 lb. (64 kg)	215 lb. (98 kg)	231 lb. (105 kg)
Drive System	Direct	Direct	Direct
RPM*			
@ 8 gpm (30 L/min.)	48 rpm	N/A	N/A
@ 12 gpm (45 L/min.)	72 rpm	57 rpm	N/A
@ 17 gpm (64 L/min.)	102 rpm	80 rpm	41 rpm
@ 21 gpm (79 L/min.)	N/A	99 rpm	51 rpm
@ 23 gpm (87 L/min.)	N/A	109 rpm	56 rpm
@ 27 gpm (102 L/min.)	N/A	N/A	73 rpm
@ 30 gpm (114 L/min.)	N/A	N/A	70 rpm
@ 37 gpm (140 L/min.)	N/A	N/A	90 rpm
Torque*			
@ 2,000 psi (19,788 kPa)	1,021 ft.-lb. (1,523 Nm)	1,300 ft.-lb. (1,763 Nm)	2,520 ft.-lb. (3,417 Nm)
@ 2,400 psi (16,547 kPa)	1,225 ft.-lb. (1,661 Nm)	1,560 ft.-lb. (2,115 Nm)	3,024 ft.-lb. (4,100 Nm)
@ 2,700 psi (18,616 kPa)	1,378 ft.-lb. (1,868 Nm)	1,755 ft.-lb. (2,379 Nm)	3,402 ft.-lb. (4,213 Nm)
@ 3,000 psi (20,684 kPa)	1,532 ft.-lb. (2,077 Nm)	1,950 ft.-lb. (2,644 Nm)	3,780 ft.-lb. (5,125 Nm)
@ 3,300 psi (22,753 kPa)	N/A	2,415 ft.-lb. (2,908 Nm)	4,158 ft.-lb. (5,638 Nm)
@ 3,500 psi (24,132 kPa)	N/A	2,275 ft.-lb. (3,084 Nm)	4,410 ft.-lb. (5,979 Nm)
Bit Size			
Light Duty	6.0 in., 9.0 in., 12.0 in., 15.0 in., 18.0 in., 24.0 in., 30.0 in., 36.0 in.		
Standard	6.0 in., 9.0 in., 12.0 in., 15.0 in., 18.0 in., 24.0 in., 30.0 in., 36.0 in.		
Tree Planting	18.0 in., 24.0 in., 30.0 in., 36.0 in.		
Heavy Duty	6.0 in., 9.0 in., 12.0 in., 16.0 in., 18.0 in., 20.0 in., 24.0 in., 30.0 in.		
Rock	6.0 in., 9.0 in., 12.0 in., 16.0 in., 18.0 in., 20.0 in., 24.0 in., 30.0 in.		

* Values are calculated, theoretical at 100% efficiency.

Planetary Auger	MODEL 35PH	MODEL 50PH
Housing		
Length	11.42 in. (290 mm)	11.42 in. (290 mm)
Width	11.55 in. (293 mm)	11.55 in. (293 mm)
Clearance Diameter of Drive Unit	12.00 in. (305 mm)	12.00 in. (305 mm)
Weight	297 lb. (134 kg)	299 lb. (135 kg)
Drive System	Planetary	Planetary
RPM*		
@ 18 gpm (68.13 L/min.)	46 rpm	36 rpm
@ 22 gpm (83.27 L/min.)	56 rpm	45 rpm
@ 26 gpm (98.41 L/min.)	67 rpm	53 rpm
@ 30 gpm (113.55 L/min.)	77 rpm	61 rpm
@ 32 gpm (121.12 L/min.)	82 rpm	65 rpm
@ 34 gpm (128.69 L/min.)	87 rpm	69 rpm
@ 36 gpm (136.26 L/min.)	92 rpm	73 rpm
@ 38 gpm (143.83 L/min.)	98 rpm	77 rpm
Torque*		
@ 2,000 psi (19,788 kPa)	2,387 ft.-lb. (3,237 Nm)	3,023 ft.-lb. (4,100 Nm)
@ 2,400 psi (16,547 kPa)	2,864 ft.-lb. (3,884 Nm)	3,628 ft.-lb. (4,920 Nm)
@ 2,600 psi (17,926 kPa)	3,103 ft.-lb. (4,208 Nm)	3,931 ft.-lb. (5,330 Nm)
@ 3,000 psi (20,684 kPa)	3,580 ft.-lb. (4,855 Nm)	4,535 ft.-lb. (6,150 Nm)
@ 3,200 psi (22,063 kPa)	3,819 ft.-lb. (5,179 Nm)	4,838 ft.-lb. (6,560 Nm)
@ 3,500 psi (24,132 kPa)	4,177 ft.-lb. (5,664 Nm)	5,291 ft.-lb. (7,175 Nm)
Bit Size		
Heavy Duty	8.0 in., 12.0 in., 18.0 in., 24.0 in., 30.0 in., 36.0 in., 48.0 in.	
Rock	8.0 in., 12.0 in., 18.0 in., 24.0 in., 30.0 in.	

* Values are calculated, theoretical at 100% efficiency.

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Excavator, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



BUCKET

Make quick work of any **DIGGING CHALLENGE.**

OPTIMIZE THE PRODUCTIVITY OF YOUR BOBCAT EXCAVATOR WITH THE RIGHT BUCKET FOR THE JOB.

PIN-ON BUCKETS

For the 418, E20 and the backhoe attachment, pin-on buckets deliver effective digging performance. Choose from two-styles: standard-duty or grading.

SMOOTH-LIP X-CHANGE™ BUCKETS

Want excellent digging performance without the weld-on teeth? The smooth-lip bucket is for you.

- Horizontal wear bars add strength and durability while protecting against wear and tear.
- Reversible bolt-on side cutters protect the corners of the bucket and deliver increased cutter life.

STANDARD-DUTY X-CHANGE BUCKETS

Take on a difficult digging challenge with this high-performance bucket. A resilient cutting edge and weld-on teeth easily penetrate materials. Vertical wear bars improve strength and durability while providing extra protection from the rigors of the job. Reversible bolt-on side cutters protect the corners of the bucket and deliver increased cutter life. Bolt-on shanks are easy to replace as needed. The X-Change attachment mounting system provides fast changes between attachments and buckets.

SEVERE-DUTY X-CHANGE BUCKETS

Harsh conditions are no match for the high-strength reinforcement of the severe-duty bucket. A reinforced weld-on side plate adds durability that's beneficial in abrasive or rocky soils. The scalloped weld-on side plate cutting edge improves digging performance and adds even more protection. For severe digging and prying, the X-Change reinforcement plate on buckets 18 inches and wider provides a big productivity and durability advantage.

TRENCHING BUCKETS

Dig narrow, deep trenches while maintaining excellent breakout force and fast cycle times. The trenching buckets are available in widths ranging from 12 to 36 inches and come in heavy- and severe-duty styles.

GRADING BUCKETS

Add contours for drainage or beauty with Bobcat grading buckets. Grading buckets feature a smooth lip for finish grading, cleaning ditches, backfilling and leveling. Scalloped weld-on side plate cutting edges increase strength, improve digging performance and protect the side of the bucket from wear and tear. Wider grading buckets have internal gussets that provide extra strength. Pick up the Hydra-Tilt™ or PowerTilt® swing accessories that offer a greater range of motion for digging around or under objects or shaping landscape features.



- Dig trenches and ditches
- Excellent for water, power and telecommunications or sewer and drainage projects



- Complete finish grading
- Backfill
- Clean ditches

Specifications	39 in. Grading Bucket	52 in. Grading Bucket
Operating Weight	232 lb. (105 kg)	338 lb. (153 kg)
Length	20.4 in. (518 mm)	20.4 in. (518 mm)
Width	39.3 in. (998 mm)	52.3 in. (1,328 mm)
Height	16.3 in. (414 mm)	16.3 in. (414 mm)
ISO Heaped Capacity	4.7 ft. ³ (0.13 m ³)	6.5 ft. ³ (0.18 m ³)
ISO Heaped Struck	3.4 ft. ³ (0.10 m ³)	4.6 ft. ³ (0.13 m ³)

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information

BUCKET ACCESSORIES



QUICKLY AND EASILY
*expand the capabilities
of your buckets with
bolt-on options.*

BOLT-ON TOOTH SHANKS WITH REPLACEABLE TEETH

Teeth made of heavy-duty cast steel keep going when the going gets tough. Multiple tooth sizes available.

PIN-ON TEETH Easily replace worn-out teeth or tailor your bucket to the job with different styles of teeth.

REVERSIBLE BOLT-ON SIDE CUTTERS Protect the corners of the bucket; reversible to increase cutter life.

WELD-ON CUTTING EDGE Provides a stronger, more resilient cutting edge.

WELD-ON SHANKS Offer strength and durability with no chance of breaking bolts.

X-CHANGE™ REINFORCEMENT PLATE (18-inch bucket and up)
Adds durability for severe digging/prying applications.



DEPTH CHECK SYSTEM

SAVE TIME AND REDUCE ERROR *with the Bobcat Depth Check System.*

The Bobcat® Depth Check system for compact excavators improves profitability by minimizing the tendency to over- and under-dig. With an accuracy of +/- 0.50 in., it's a superior and affordable option for achieving grade or meeting minimum cover specifications.

INTEGRATED WITH THE BOBCAT DELUXE INSTRUMENTATION PANEL

When you have Deluxe Instrumentation installed on your Bobcat compact excavator, there are no display screens or control panels to install. The Deluxe Instrumentation Panel provides complete control and job monitoring, including:


- Distance to Target
- Grade Check
- Depth Check

FULLY WIRED FOR SIMPLICITY AND ACCURACY

The simple, durable Depth Check system from Bobcat is wired, so job conditions or wireless signal loss will never rob your accuracy.

- Reduces the lag time of the signal transmission from the sensor to the Deluxe Instrumentation Panel display
- Maintains a strong signal even when submerged in water
- No batteries to charge and maintain

The Bobcat Depth Check system includes position sensors for the boom, arm and bucket (three total) and all necessary harnesses. Optional laser receivers provide even more flexibility.

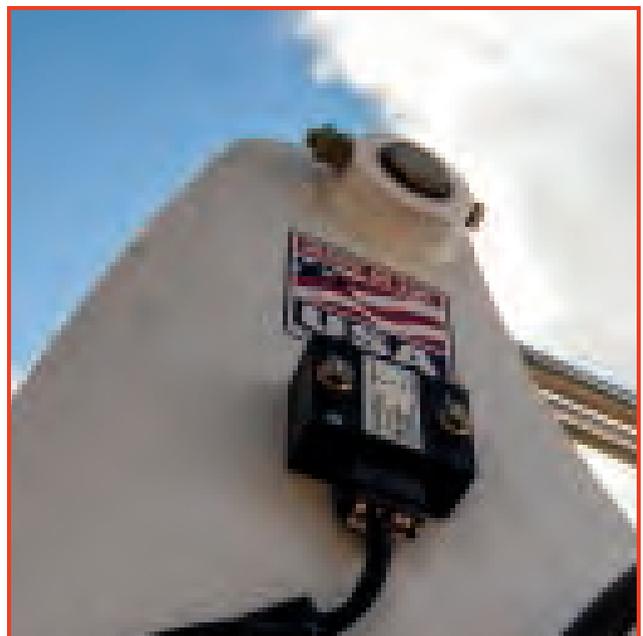

Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information

CUT BRUSH AND MULCH MATERIAL WITH YOUR EXCAVATOR.

Expand the versatility of your compact excavator. Cut down brush, thick weeds and grass, even small trees with the Bobcat® flail mower. It cuts aggressively and efficiently, with a direct-drive hydraulic motor that provides the optimum balance between torque and rpm, and triple-knife flails that rip through hard and soft woods, vines, grass and brush.



A rubber torsion disc absorbs stress during operation, and heavy-duty flanges on both sides of the rotor protect the drive train. Side safety chains help contain debris that can be thrown during operation. Switch the hydraulic hoses at the drive motor to change the rotation of the reversible flails, increasing overall flail life.



Scan the code to see the flail mower in action.

Specifications	30FM	40FM	40FMR
Weight (with X-Change™ Mount)	649 lb.	736 lb.	881 lb.
Weight (with Pin-on Mount)	N/A	708 lbs.	876 lbs.
Working Width	30 in.	40 in.	40 in.
Overall Width	50.4 in.	60.4 in.	60.4 in.
Cutting Capacity	Up to 4 in.*	Up to 4 in.	Up to 4 in.
Hydraulic Flow	12.2 – 19.5 gpm	14 – 22.4 gpm	18.4 – 31.7 gpm
Number of Knives	27	36	36
Mount Options	X-Change	X-Change, Pin-on	X-Change, Pin-on

Approved Machine: Mini Excavator

*Up to 1.5 in. on E32i, E35i



HYDRAULIC BREAKER

BREAK CONCRETE FASTER

and cut through rocks easier.

- 60- to 1,000-ft.-lb. impact energy classes
- Most models can quickly mount to loader or excavator
- Transmit lower noise and vibration levels
- Virtually maintenance-free

All it takes is the hydraulic breaker attachment to demolish the job fast.



Scan the code to watch the breaker in action.



OPTIONS AND ACCESSORIES

Breaker Bits: A wide variety of breaker tools ensures you can always use the right tool for the task at hand.

CONSTANT POWER AND CONSISTENT PRODUCTIVITY FOR EVERY JOB.

Bobcat® breakers use hydraulic oil flowing through your machine to fire the breaker. Nitrogen assists the piston's return to the firing position. This design delivers peak power with every blow and needs less recharging. Plus it requires virtually no energy-chamber maintenance. Most breakers from other manufacturers fire the piston with compressed nitrogen, which leaks through piston seals during use or through improper storage. Over time, this leads to decreased performance. Bobcat breakers also use hydraulic oil to cool the piston and breaker walls, which prevents wear and extends the life of your attachment.

HYDRAULIC BREAKER

AUTOMATIC POWER REGULATION

Automatic pressure regulation ensures consistent performance, regardless of changes in outdoor temperature, and delivers maximum performance across multiple carrier types. It also limits excessive pressure at the time of start-up, which prevents wear and potential downtime.

CYLINDRICAL BREAKER CRADLE

This design improves job access and accuracy in confined areas.

EASY MOUNTING AND CARRIER VERSATILITY

It's easy and fast to mount and remove, or switch from a loader to excavator and back, with the Bob-Tach® and X-Change™ attachment mounting systems.

LOW MAINTENANCE DESIGN

The breaker has only 12 main service parts. Fewer breakdowns can occur, and if they do, it's easy to repair.

LOW NOISE

Upper and lower shock absorbers reduce noise and vibration for greater operator comfort and no performance tradeoff.

STEEL RING SYSTEM

Retains the tool bushing, protects the grease access and provides for quick tool changes.

HOSE GUARD


Protects hoses and fittings when working in tight spaces.

INCLUDED GO/NO-GO GAUGE

Quickly check the gauge to see whether critical components meet spec or not. There's no measuring required.

SINGLE LOWER BUSHING

Most models have just one lower bushing that is easily replaceable on the job.

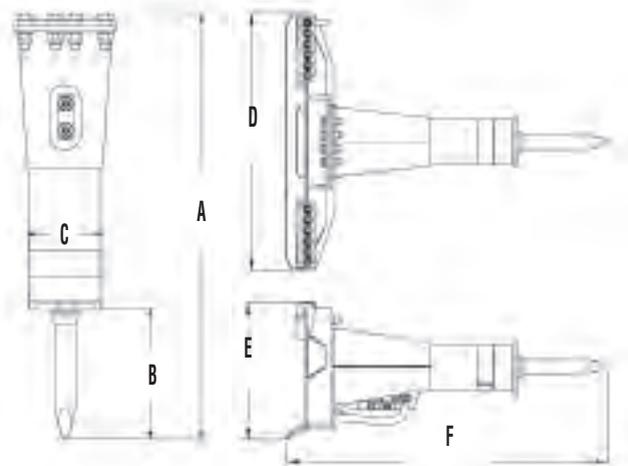

Model	HB280	HB680	HB880	HB980	HB1180	HB1380	HB2380
Performance							
Impact Energy Class	60 ft.-lb. (81J)	150 ft.-lb. (200J)	300 ft.-lb. (407J)	500 ft.-lb. (650J)	750 ft.-lb. (1,016J)	850 ft.-lb. (1,152J)	1,000 ft.-lb. (1,356J)
CIMA Tool Energy Rating	59 ft.-lb. (59J)	143 ft.-lb. (194J)	207 ft.-lb. (282J)	282 ft.-lb. (382J)	384 ft.-lb. (502J)	515 ft.-lb. (700J)	700 ft.-lb. (950J)
Blows Per Minute	1,290 @ 6 gpm	1,340 @ 13 gpm	1,310 @ 17 gpm	1,450 @ 21 gpm	1,280 @ 26 gpm	1,230 @ 32 gpm	910 @ 33 gpm
Flow Requirements	3.4-6.1 gpm (13-23 L/min.)	7.0-13.0 gpm (26-49 L/min.)	8.0-17.0 gpm (30-64 L/min.)	12.0-23.0 gpm (45-87 L/min.)	15.0-26.0 gpm (57-98 L/min.)	17.0-32.0 gpm (65-120 L/min.)	19.8-33.0 gpm (75-125 L/min.)
Estimated Breaker Performance with Concrete							
Recommended Working Thickness	1.0-4.0 in. (25-100 mm)	2.0-4.0 in. (50-100 mm)	4.0-10.0 in. (100-250 mm)	6.0-14.0 in. (150-350 mm)	8.0-16.0 in. (150-350 mm)	10.0-18.0 in. (250-455 mm)	12.0-20.0 in. (305-500 mm)
Demolished Volume Per Hour							
Non-Reinforced	1-2 yd. ³ /hr. (0.8-1.5 m ³ /hr.)	1-4 yd. ³ /hr. (0.8-3.1 m ³ /hr.)	4-12 yd. ³ /hr. (3.1-9.2 m ³ /hr.)	5-15 yd. ³ /hr. (3.8-11.5 m ³ /hr.)	6-15 yd. ³ /hr. (4.6-11.5 m ³ /hr.)	8-17 yd. ³ /hr. (6.1-13 m ³ /hr.)	10-20 yd. ³ /hr. (7.6-15.3 m ³ /hr.)
Reinforced	1-2 yd. ³ /hr. (0.8-1.5 m ³ /hr.)	1-3 yd. ³ /hr. (0.8-2.3 m ³ /hr.)	1-4 yd. ³ /hr. (0.8-3.1 m ³ /hr.)	2-6 yd. ³ /hr. (1.5-4.6 m ³ /hr.)	2-7 yd. ³ /hr. (1.5-5.4 m ³ /hr.)	3-8 yd. ³ /hr. (2.3-6.1 m ³ /hr.)	4-9 yd. ³ /hr. (3.1-6.9 m ³ /hr.)
Weights							
Breaker with Nail Point and Excavator Fixing Cap	160 lb. (73 kg)	426 lb. (152 kg)	580 lb. (263 kg)	720 lb. (327 kg)	819 lb. (372 kg)	1,011 lb. (459 kg)	1,065 lb. (483 kg)
Breaker with Nail Point and Loader Mounting Frame	N/A	494 lb. (224 kg)	736 lb. (334 kg)	876 lb. (397 kg)	1,050 lb. (476 kg)	1,161 lb. (527 kg)	1,215 lb. (551 kg)
Breaker with Nail Point, Excavator Fixing Cap and Loader X-Change Frame	160 lb. (73 kg)	632 lb. (287 kg)	786 lb. (334 kg)	1,082 lb. (490 kg)	1,130 lb. (513 kg)	973 lb. (441 kg)	1,027 lb. (466 kg)
Dimensions							
Length (A) (excavator fixing cap)	40.3 in. (1,024 mm)	49.7 in. (1,262 mm)	57.5 in. (1,461 mm)	60.7 in. (1,542 mm)	64.9 in. (1,647 mm)	67.5 in. (1,713 mm)	71.3 in. (1,811 mm)
Tool Length (B)	10.6 in. (269 mm)	13.0 in. (330 mm)	13.0 in. (330 mm)	14.0 in. (356 mm)	16.0 in. (406 mm)	17.0 in. (432 mm)	18.0 in. (457 mm)
Breaker Lower (C) Cradle Diameter	5.2 in. (132 mm)	7.3 in. (186 mm)	8.4 in. (214 mm)	8.8 in. (223 mm)	9.5 in. (241 mm)	9.6 in. (244 mm)	9.7 in. (246 mm)
Width (D) (loader mounting frame)	N/A	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)
Height (E) (loader mounting frame)	N/A	20.5 in. (520 mm)	20.5 in. (520 mm)	20.5 in. (520 mm)	20.5 in. (520 mm)	20.5 in. (520 mm)	20.5 in. (520 mm)
Length (F) (loader mounting frame)	N/A	44.7 in. (1,136 mm)	52.9 in. (1,344 mm)	55.9 in. (1,421 mm)	60.3 in. (1,530 mm)	64.9 in. (1,647 mm)	68.7 in. (1,745 mm)
Tool Diameter	1.5 in. (37 mm)	2.2 in. (55.1 mm)	2.6 in. (65 mm)	2.8 in. (72.1 mm)	3.0 in. (77 mm)	3.4 in. (85 mm)	3.8 in. (95 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Excavator, Mini Track Loader



PACKER WHEEL

Compact backfilled trenches with power and efficiency.

While reducing the need for conventional compaction equipment, the packer wheel also eliminates the need for a person working in the trench. The compact design of the packer wheel allows it to operate in small areas, increasing the versatility of the carrier. No auxiliary hydraulics are required for operation.

Specifications

Operating Weight	386 lb. (175 kg)
Length	40.5 in. (1,029 mm)
Width	11.0 in. (279 mm)
Wheel Assembly	2
Wheel Diameter	30.0 in. (762 mm)
Sheepfoot (hollow tube)	18 (9 per wheel)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Excavator

PLATE COMPACTOR

Compact in the trench – without leaving the cab.

The plate compactor attachment provides more powerful compaction force than a hand-operated compactor, saving time on the job. Because it's operated from the cab, there's no need for a worker in the trench. The compact design easily compacts on slopes and in hard-to-reach areas. Shock mounts distribute vibration evenly and keep the attachment level, providing for efficient compacting.

Specifications

	PCF34	PCF64
Operating Weight	575 lb. (261 kg)	950 lb. (431 kg)
Length	26.0 in. (660 mm)	34.2 in. (869 mm)
Width	18.8 in. (476 mm)	23.5 in. (597 mm)
Dynamic Force	3,400 lb. (1,542 kg)	6,400 lb. (2,903 kg)
Frequency	2,100 vpm	2,000 vpm

Approved Machine: Mini Excavator



Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

OPEN WIDER,

Interchangeable work tools for grabbing or grading.

The Pro Clamp™ System – available only for your Bobcat® excavator – adds incredible versatility with interchangeable tools that adjust to the task. Just attach the Pro Clamp base. Pin on the adjustable material clamp to grab. Switch to the reversible grading tool to grade. And if you need more curling ability for loading trucks or extra visibility when trenching and digging around utilities, simply remove the tool and tuck the Pro Clamp base out of the way.

For more information

PRO CLAMP SYSTEM

LIFT BIGGER WITH THE PRO CLAMP SYSTEM.



Your excavator can grab larger, odd-shaped material or efficiently complete grading tasks with just a simple tool change or adjustment.

Choose between the standard tool and a grading tool. Both can adjust to different materials or jobs by changing the pin location.

- Select the standard tool for traditional clamp functionality. For greater performance, adjust it to provide a wider, more aggressive bite that wraps around larger objects and difficult-to-handle materials. The tool can be positioned to allow the clamp to follow the bucket farther while dumping.
- When pinned in its forward position, the grading tool adds a lip to your bucket for a smooth bottom in the trench – even when using a toothed bucket. When you pin the grading tool in its reverse position, it can also speed the cleanup of spoil piles. With a quick adjustment to the pin position, it also provides clamshell functionality with a toothless bucket.

GRAB LARGER, ODD-SHAPED MATERIAL



Standard Tool



Grading Tool

Specifications	E32/E35/E32i/E35i	E42/E45/E50/E55
Standard Tool		
Operating Weight	189 lb. (86 kg)	317 lb. (144 kg)
Thickness	0.63 in. (16 mm)	0.75 in. (19 mm)
Number of Teeth	2	2
Teeth Width	13.4 in. (341 mm)	15.9 in. (403 mm)
Grading Tool		
Operating Weight	194 lb. (88 kg)	302 lb. (137 kg)
Thickness	0.63 in. (16 mm)	0.63 in. (16 mm)
Cutting Edge Width	24.25 in. (616 mm)	24.25 in. (616 mm)

Approved Machine: Mini Excavator

CLAMP

Get a grip on material to lift, move and place.

Designed for Bobcat® compact excavators. Easily maneuver the clamp attachment into hard-to-reach areas, allowing you to selectively grab objects. Use with a trenching bucket or three-tine grapple and easily move odd-shaped objects such as tree stumps and concrete.



Specifications	E26-E35 Class III	E42 Class III	E42-E63 Class IV	E85
Operating Weight	126 lb. (57 kg)	171 lb. (78 kg)	218 lb. (99 kg)	449 lb. (204 kg)
Clamp Width	13.0 in. (330 mm)	14.4 in. (366 mm)	15.0 in. (381 mm)	16.5 in. (419 mm)
Tooth Radius	27.2 in. (691 mm)	27.2 in. (691 mm)	32.0 in. (813 mm)	41.0 in. (1,041 mm)
Tooth Thickness	0.75 in. (19 mm)	0.75 in. (19 mm)	1.0 in. (25 mm)	1.0 in. (25 mm)

Approved Machine: Mini Excavator

Bobcat.com/AllAttach

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.





RIPPER

Rip through tough, hard-packed and frozen material.

Built for penetration, the ripper attachment effortlessly tears through tough soil and frozen ground. Gussets provide ample ripping power. A heavy-duty shank reinforces the attachment structure for maximum durability and uptime. Once the ground is loosened, replace it with a bucket to finish the job.



Specifications	Frost and Rock	Frost and Rock E85
Operating Weight	195 lb. (89 kg)	290 lb. (132 kg)
Length	30.1 in. (765 mm)	24.0 in. (610 mm)
Width	1.5 in. (38 mm)	1.5 in. (38 mm)
Tooth Radius	35.5 in. (902 mm)	35.5 in. (902 mm)
Shank Thickness	1.5 in. (38 mm)	1.5 in. (38 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Excavator

3-TINE GRAPPLE

Move more than earth.

Your Bobcat® excavator can do more than dig. The three-tine design of this powerful grapple grabs, picks and places large, hard-to-manage materials with ease. Move brush, logs, debris and landscaping stones on land clearing, landscaping, demolition, construction, grounds maintenance and other jobsites.



Specifications	Class III	Class IV
Operating Weight	200 lb. (91 kg)	225 lb. (102 kg)
Grapple Width	20.5 in. (521 mm)	20.5 in. (521 mm)
Tine Radius	27.0 in. (686 mm)	33.0 in. (838 mm)
Tine Thickness	0.75 in. (19 mm)	0.75 in. (19 mm)

Approved Machine: Mini Excavator

SWING ACCESSORIES

HYDRA-TILT

Tilt buckets or blades 30 degrees to create slopes, grades and contours.

The Hydra-Tilt™ swing accessory for your compact excavator uses a wrist-like action to angle the excavator bucket or blade 30 degrees to the left or right, for a total range of 60 degrees. Reduces repositioning to save time and improve productivity on countless jobs, such as creating slopes and drainage ditches or digging around culverts and sewer lines.



Specifications	
Operating Weight	250 lb. (113 kg)
Length	31.0 in. (787 mm)
Width	17.5 in. (445 mm)
Side-to-Side Rotation	60 deg.
Output Torque	3,210 ft.-lb.
Output Torque @	3,000 psi

Approved Machine: Mini Excavator

POWERTILT

Dig under and around objects with 90 degrees of motion to either side.

Using its wrist-like action, the PowerTilt® swing accessory tilts the excavator bucket to the left or right, reducing the need to move the entire machine. Its wide range of motion allows it to dig around and under objects such as culverts and sewer lines. It even delivers the flexibility needed to dig and shape holes or ditches, level terrain, backfill trenches or do finish grading.



Specifications	PTX3	PTX4
Operating Weight	170 lb. (77 kg)	285 lb. (129 kg)
Length	25.0 in. (635 mm)	25.0 in. (635 mm)
Width	11.0 in. (279 mm)	11.0 in. (279 mm)
Side-to-Side Rotation	178 deg.	180 deg.
Output Torque	2,100 ft.-lb.	3,250 ft.-lb.
Output Torque @	3,000 psi	3,000 psi

PowerTilt® is a registered trademark of Helac Corporation.

Approved Machine: Mini Excavator



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information

TRENCHER

TAKE ON TOUGH trenching jobs.



The Bobcat® trencher creates trenches fast – even when working in hard, rocky soil. Teeth and chain options give you more versatility, enabling you to maximize trenching capabilities for soil conditions.

AUGER

Designed with a large diameter, the auger moves material from the side of the trench, limiting the amount of spoil falling back into the trench.

GREASE CYLINDER TENSIONING

Quickly and easily adjust your chain to the proper tension.

STANDARD CRUMBER

Helps remove soil from the trench and provide a clean, smooth trench bottom.

Specifications

MX112

Side Shift	N/A
Chain (double standard ABF)	1.7 in. (42 mm)
Auger	12.0 in. (305 mm) diameter single removable auger
Chain Tensioning	Grease cylinder
Chain Options Available	Multiple
Operating Weight (without teeth)	570 lb. (259 kg)
Trenching Widths Available	4.0-8.0 in. (102-203 mm)
Flow Range	13-20 gpm (49-76 L/min.)
Max. Operating Pressure	3,000 psi (20,684 kPa)
A. Overall Length	68.2 in. (1,732 mm)
B. Standard Boom Length	39.4 in. (1,000 mm)
C. Dig Depth @ 60 degrees	24.0 in. (610 mm)
D. Frame Width	30.6 in. (777 mm)
E. Side-Shift Travel	N/A
F. Auger Clearance	13.8-15.8 in. (351-401 mm)

Approved Machines: Mini Excavator

VH TRUSS BOOM

Bobcat powers your loader versatility.

Check out Bobcat loader attachments on pages 16-83.

Place trusses with the reach of your VersaHANDLER Telescopic Tool Carrier.

Designed for the VersaHANDLER® telescopic tool carrier, the rugged 12-foot boom is built specifically for moving trusses on construction jobsites. Fingertip controls operate the attachment, accurately placing trusses without ever having to leave the operator cab, maximizing operator comfort.

Specifications

Operating Weight	558 lb. (253 kg)
Length	146.0 in. (3,708 mm)
Height	19.3 in. (490 mm)

Approved Machine: VersaHANDLER TTC



Bobcat.com/AllAttach

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

 **Bobcat.**



EXCAVATOR ATTACHMENTS



ATTACHMENTS FOR BOBCAT EXCAVATORS



From the start, Bobcat has been helping its excavator customers do more than dig — so they can find new business opportunity and get a higher return on their equipment investment. You can even share some of the same attachments that fit on your compact excavator with Bobcat® loaders.

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

Do more than dig with excavator attachments.
Check out Bobcat MX attachments on pages 2-13.



LOADER ATTACHMENTS



ATTACHMENTS FOR BOBCAT LOADERS

Bobcat® attachments have been helping operators take on new tasks for decades upon decades. With so many to choose from, a Bobcat loader adapts in minutes to unique applications, making it one of the most versatile pieces of equipment on any job.



Bobcat powers your loader versatility.
Check out Bobcat loader attachments on pages 16-83.

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.





ANGLE BROOM



Put your Bobcat® loader to work and clean up almost everything in sight with the hydraulically driven angle broom attachment. Use it for sweeping driveways, sidewalks, parking lots, loading docks and warehouses, or for turf cleaning, dethatching and more. It's particularly useful for quick snow removal without damaging pavement surfaces.

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



ANGLE BROOM

The waved design of the angle broom bristles delivers more surface-clearing ability. This clears a cleaner path and can sweep more snow or debris in a single pass. Compact, maneuverable and easy to operate, the angle broom replaces manual labor and hand brooms while cleaning up with less effort and in less time.

**MORE MATERIAL.
FEWER PASSES.
ZERO EFFORT.**

WATER KIT

Keep dust, dirt and debris under control with the water kit attachment. Two high-capacity water tanks mount either on the uprights or in the cargo bed (depending on the carrier), supplying an even stream of water across the attachment via four spray nozzles.

- Ideal dust control for using the angle broom, sweeper, planer or vibratory roller in urban and residential areas.
- Water pump operation on/off switch is conveniently located in the carrier cab.
- High-capacity tank volume minimizes refilling, meaning longer operating time with the attachment.



Scan the code to watch the angle broom in action.

Bobcat.com/AngleBroom

COMPACT DESIGN

Designed for maximum efficiency, the angle broom attachment is compact and highly maneuverable. Available in widths of 48, 68 and 84 inches.

EASY MAINTENANCE

Quick-change rotor design makes bristle replacement easy. Simply remove two bolts and the entire rotor is released.

ANGLE CONTROL

The smaller broom has a manual angle up to 30 degrees left or right. The larger brooms feature electric-over-hydraulic control to provide infinite angle adjustment up to 25 degrees to the left or right.

FINGERTIP CONTROLS

Precise attachment control helps to finish the job quickly and efficiently, without having to leave the comfort of the cab – applies to larger brooms with electric-over-hydraulic angle only.

FLUSH SWEEPING

Get as close as you want. Improved sweeping efficiency allows for flush sweeping to a curb or wall on the right side.

PATENTED SPRING DESIGN

An exclusive spring design provides optimum down-pressure for excellent cleaning ability and extended bristle life.*

* Not available on 48-inch.

PROTECTIVE STORAGE

Larger brooms include storage stands to eliminate bristle distortion when not in use.

HIGH-TORQUE MOTOR

The high-torque motor provides maximum power for cleanup of heavy debris and material.

REPLACEMENT STEEL BRISTLES

For heavy-duty cleaning action on difficult jobs, easy-to-install steel bristles are available.

TOUGH BOBCAT BRISTLES

Job-proven and easy to replace, polypropylene bristle wafers provide excellent durability and flick material away for superior cleaning.

Specifications	48 in.	68 in.	84 in.
Overall Width	54.9 in. (1,394 mm)	79.6 in. (2,022 mm)	96.1 in. (2,448 mm)
Sweep Width Straight	48.0 in. (1,220 mm)	68.0 in. (1,727 mm)	84.0 in. (2,134 mm)
Sweep Width Fully Angled	41.5 in. (1,055 mm)	63.0 in. (1,600 mm)	77.0 in. (1,956 mm)
Degree of Angle (right or left)	30 deg.	25 deg.	25 deg.
Operating Weight	260 lb. (118 kg)	860 lb. (390 kg)	944 lb. (429 kg)
Broom Angling	Manual	Hydraulic Cylinder	Hydraulic Cylinder
Oscillation	Fixed	Fixed	Fixed
Drive System	Hydraulic Motor Chain Drive Reduction	Hydraulic Motor Direct Drive	Hydraulic Motor Direct Drive
Flow Range	8-13 gpm (30-49 L/min.)	8-24 gpm (30-91 L/min.)	15-28 gpm (57-106 L/min.)
Broom Bristle Diameter	21.4 in. (542 mm)	32.0 in. (812 mm)	32.0 in. (812 mm)
Bristle Material	Replaceable polypropylene sections (steel sections available)		
Number of Bristle Sections	23 Zig-Zag 2 Straight	36 Zig-Zag 2 Straight	44 Zig-Zag 2 Straight

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.





AUGER

You can dig deeper and faster – even in hard, rocky soil – with the Bobcat® auger attachment.

MORE DEPTH

Bobcat augers have drive units that follow the bit into the hole. They give you up to an extra foot of dig depth comparable to units from other manufacturers.

DIRECT OR PLANETARY DRIVE

The direct-drive models give you excellent torque and rpm for reliable digging performance in many soil conditions. Direct drives also require less maintenance.

Planetary drive augers deliver the extra power and torque necessary for anchor applications and extreme ground conditions, including rock, shale, clay or frost.

BOB-TACH VERSATILITY

The Bob-Tach® mounting system allows you to quickly and easily use the auger on multiple carriers, from loaders and compact excavators to the Toolcat™ utility work machine or VersaHANDLER® telescopic tool carrier.



EXCLUSIVE

COMBINATION HEX AND ROUND OUTPUT SHAFT

Available on models 15C and 30C, this output shaft accepts more types of bits for more types of digging.

BITS AND TEETH

Match the tool to the job: light-duty, heavy-duty and rock auger bits are available, with diameters from 6 to 42 inches.



UNIQUE KNUCKLE JOINT DESIGN

The knuckle joint enables the auger to dig vertical holes even if your Bobcat unit is on uneven terrain.



DIG HOLES FASTER AND DEEPER.

Bobcat
ADVANTAGE

DIGGING DEPTH CHALLENGE

Watch our online video to compare augers.

More auger video comparisons:

• Torque Challenge

• Maintenance Challenge

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



AUGER



Dig deeper with Bobcat augers.



Model	Torque	Speed	Recommended Uses	Depth*
Model 10	Low	High	Areas with relatively easy digging or loose soils. Up to 24-in. diameter bits.	58 in.
Model 15C/15H	Med	Med	Moderate to heavy digging requirements, rocky soil and occasional tough digging. Up to 36-in. diameter bits.	62 in.
Model 30C/30H	High	Low	Hard, tough, all-day digging through hardpan, frost or asphalt. Ideal for large diameter bits and hex drive applications.	62 in.
Model 35/50 PH	High	Low	Extreme ground conditions like rock, shale, clay or frost. Ideal for anchor applications.	75 in.

* Digging depth without extension

up to 6'

Direct Drive Auger	MODEL 10	MODEL 15C/15H	MODEL 30C/30H
Housing			
Length	8.40 in. (214 mm)	10.60 in. (269 mm)	10.60 in. (269 mm)
Width	9.20 in. (233 mm)	10.20 in. (260 mm)	10.20 in. (260 mm)
Clearance Diameter of Drive Unit	10.00 in. (254 mm)	12.00 in. (305 mm)	12.00 in. (305 mm)
Weight	140 lb. (64 kg)	215 lb. (98 kg)	231 lb. (105 kg)
Drive System	Direct	Direct	Direct
RPM*			
@ 8 gpm (30 L/min.)	48 rpm	N/A	N/A
@ 12 gpm (45 L/min.)	72 rpm	57 rpm	N/A
@ 17 gpm (64 L/min.)	102 rpm	80 rpm	41 rpm
@ 21 gpm (79 L/min.)	N/A	99 rpm	51 rpm
@ 23 gpm (87 L/min.)	N/A	109 rpm	56 rpm
@ 27 gpm (102 L/min.)	N/A	N/A	73 rpm
@ 30 gpm (114 L/min.)	N/A	N/A	70 rpm
@ 37 gpm (140 L/min.)	N/A	N/A	90 rpm
Torque*			
@ 2,000 psi (19,788 kPa)	1,021 ft.-lb. (1,523 Nm)	1,300 ft.-lb. (1,763 Nm)	2,520 ft.-lb. (3,417 Nm)
@ 2,400 psi (16,547 kPa)	1,225 ft.-lb. (1,661 Nm)	1,560 ft.-lb. (2,115 Nm)	3,024 ft.-lb. (4,100 Nm)
@ 2,700 psi (18,616 kPa)	1,378 ft.-lb. (1,868 Nm)	1,755 ft.-lb. (2,379 Nm)	3,402 ft.-lb. (4,213 Nm)
@ 3,000 psi (20,684 kPa)	1,532 ft.-lb. (2,077 Nm)	1,950 ft.-lb. (2,644 Nm)	3,780 ft.-lb. (5,125 Nm)
@ 3,300 psi (22,753 kPa)	N/A	2,415 ft.-lb. (2,908 Nm)	4,158 ft.-lb. (5,638 Nm)
@ 3,500 psi (24,132 kPa)	N/A	2,275 ft.-lb. (3,084 Nm)	4,410 ft.-lb. (5,979 Nm)
Bit Size			
Light Duty	6.0 in., 9.0 in., 12.0 in., 15.0 in., 18.0 in., 24.0 in., 30.0 in., 36.0 in.		
Standard	6.0 in., 9.0 in., 12.0 in., 15.0 in., 18.0 in., 24.0 in., 30.0 in., 36.0 in.		
Tree Planting		18.0 in., 24.0 in., 30.0 in., 36.0 in.	
Heavy Duty	6.0 in., 9.0 in., 12.0 in., 16.0 in., 18.0 in., 20.0 in., 24.0 in., 30.0 in.		
Rock	6.0 in., 9.0 in., 12.0 in., 16.0 in., 18.0 in., 20.0 in., 24.0 in., 30.0 in.		

* Values are calculated, theoretical at 100% efficiency.

Planetary Auger	MODEL 35PH	MODEL 50PH
Housing		
Length	11.42 in. (290 mm)	11.42 in. (290 mm)
Width	11.55 in. (293 mm)	11.55 in. (293 mm)
Clearance Diameter of Drive Unit	12.00 in. (305 mm)	12.00 in. (305 mm)
Weight	297 lb. (134 kg)	299 lb. (135 kg)
Drive System	Planetary	Planetary
RPM*		
@ 18 gpm (68.13 L/min.)	46 rpm	36 rpm
@ 22 gpm (83.27 L/min.)	56 rpm	45 rpm
@ 26 gpm (98.41 L/min.)	67 rpm	53 rpm
@ 30 gpm (113.55 L/min.)	77 rpm	61 rpm
@ 32 gpm (121.12 L/min.)	82 rpm	65 rpm
@ 34 gpm (128.69 L/min.)	87 rpm	69 rpm
@ 36 gpm (136.26 L/min.)	92 rpm	73 rpm
@ 38 gpm (143.83 L/min.)	98 rpm	77 rpm
Torque*		
@ 2,000 psi (19,788 kPa)	2,387 ft.-lb. (3,237 Nm)	3,023 ft.-lb. (4,100 Nm)
@ 2,400 psi (16,547 kPa)	2,864 ft.-lb. (3,884 Nm)	3,628 ft.-lb. (4,920 Nm)
@ 2,600 psi (17,926 kPa)	3,103 ft.-lb. (4,208 Nm)	3,931 ft.-lb. (5,330 Nm)
@ 3,000 psi (20,684 kPa)	3,580 ft.-lb. (4,855 Nm)	4,535 ft.-lb. (6,150 Nm)
@ 3,200 psi (22,063 kPa)	3,819 ft.-lb. (5,179 Nm)	4,838 ft.-lb. (6,560 Nm)
@ 3,500 psi (24,132 kPa)	4,177 ft.-lb. (5,664 Nm)	5,291 ft.-lb. (7,175 Nm)
Bit Size		
Heavy Duty	8.0 in., 12.0 in., 18.0 in., 24.0 in., 30.0 in., 36.0 in., 48.0 in.	
Rock	8.0 in., 12.0 in., 18.0 in., 24.0 in., 30.0 in.	

* Values are calculated, theoretical at 100% efficiency.

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Excavator, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC

**BACKHOE**

- Complete excavation jobs at landscaping sites
- Dig sewage system and septic tanks
- Complete water and power line maintenance



Scan the code to see the backhoe in action.

With a range of backhoe models for most Bobcat® loaders, this attachment is powerful enough to handle full-time excavating jobs. The backhoe attachment operates with minimal ground disturbance and is ideal for working in sensitive areas.

Once the digging is done, switching the backhoe attachment is quick and easy. Why spend extra time and effort hauling a separate machine to the jobsite when a single Bobcat loader, with its quick, easy Bob-Tach® mounting system, can do so much more?

Turn your
Bobcat loader
into a
**POWERFUL
EXCAVATOR.**

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information

WIDE RANGE OF DIGGING DEPTHS

With a full line of backhoe models for most sizes of loaders, the backhoe attachment features digging depths from 6 to 11 feet. Choose the combination of excavating performance and carrier versatility that's right for the job.

EASY TO TRANSPORT

Moves from one job to the next with ease, allowing maximum attachment use without the hassle.

EXCELLENT DOWN-HOLE VISIBILITY

The backhoe attachment offers clear visibility when operating, allowing for efficient and accurate operation.

X-CHANGE™ ATTACHMENT MOUNTING SYSTEM

Quickly and easily change buckets, ripper or packer wheel for the task. Multiple bucket widths offer the best fit for any excavating job size.

OPTIONS AND ACCESSORIES

Frame-mounted rear stabilizers increase backhoe performance in a wide range of jobs. They level the loader in uneven terrain and improve the performance of the backhoe attachment by transferring the weight of the Bobcat loader to the backhoe, where it's needed for more digging capability. Optional stabilizer street pads protect sensitive surfaces from damage while maintaining performance of the backhoe attachment.

Bob-Tach Backhoe

Shown with optional clamp.


Specifications

Shipping Weight (without bucket)	680 lb. (308 kg)
Operating Weight (without bucket)	630 lb. (286 kg)
Swing Angle	48 deg. left or right
Length	77.0 in. (1,957 mm)
Width	50.0 in. (1,270 mm)
Height	17.8 in. (452 mm)
Dig Depth	72.0 in. (1,830 mm)
Reach	77.0 in. (1,957 mm)
Dig Force Bucket	4,878 lbf.
Bolt-on X-Change System	Standard
Available Bucket Widths	13.0 in. (330 mm) 16.0 in. (406 mm) 20.0 in. (508 mm)

Approved Machines:
Skid-Steer Loader,
Compact Track Loader

General	M06	607	8811	9BH
Weight (without bucket)	685 lb. (310 kg)	1,298 lb. (589 kg)	2,012 lb. (913 kg)	1,487 lb. (675 kg)
Dimensions				
Stabilizer Type	Fold-Down	Vertical	Fold-Down	Vertical
Stabilizer Spread Transport	41.8 in. (1,062 mm)	54.0 in. (1,373 mm)	70.3 in. (1,786 mm)	54.1 in. (1,374 mm)
Stabilizer Width, Pads Removed	36.0 in. (914 mm)			
Stabilizer Spread Working	64.3 in. (1,633 mm)	54.0 in. (1,373 mm)	130.3 in. (3,309 mm)	54.1 in. (1,374 mm)
Ground Clearance	2.0 in. (51 mm)	8.4 in. (214 mm)	4.1 in. (104 mm)	5.7 in. (146 mm)
Digging Depth – Max.	76.2 in. (1,935 mm)	95.1 in. (2,416 mm)	135.7 in. (3,448 mm)	116.6 in. (2,962 mm)
Digging Depth – 2 ft. Flat Bottom	72.5 in. (1,841 mm)	93.9 in. (2,386 mm)	134.8 in. (3,425 mm)	115.6 in. (2,937 mm)
Loading Height	38.9 in. (988 mm)	72.3 in. (1,837 mm)	100.0 in. (2,539 mm)	83.3 in. (2,115 mm)
Reach from Swing Pivot	88.0 in. (2,235 mm)	123.2 in. (3,128 mm)	166.0 in. (4,216 mm)	145.3 in. (3,691 mm)
Swing Arc	180 deg.	180 deg.	180 deg.	180 deg.
Bucket Rotation	146 deg.	185 deg.	200 deg.	200 deg.
Bucket Mounting System	Pin-on	X-Change system	X-Change system	X-Change system
Available Bucket Widths	9.0 in. (229 mm) 12.0 in. (305 mm)	13.0 in. (330 mm) 16.0 in. (406 mm)	13.0 in. (330 mm) 16.0 in. (406 mm) 20.0 in. (508 mm) 24.0 in. (610 mm)	16.0 in. (406 mm) 18.0 in. (457 mm) 20.0 in. (508 mm) 24.0 in. (610 mm) 30.0 in. (762 mm) 36.0 in. (914 mm) 39.0 in. (991 mm)

Approved Machines: Skid-Steer Loader,
Compact Track Loader, All-Wheel Steer
Loader, Mini Track Loader

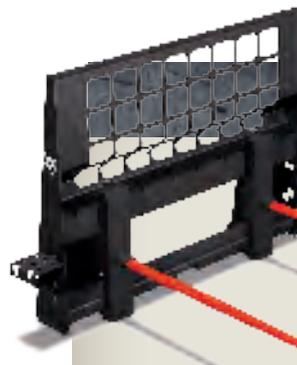BALE FORK

Lift, haul and stack hay bales easily and efficiently.

Two small-diameter forks, mounted on the frame, penetrate bales with ease – especially densely compacted materials. The two-fork design stabilizes loads by balancing round bales and securing uneven bales, preventing bale rotation. Even large, square bales are easily transported for less hauling time and more hours tending to livestock.

- Move and load round, uneven or square bales
- 40.8-inch fork length
- Two small-diameter forks penetrate the material
- Mounts to standard or heavy-duty pallet fork attachment frame



BORING UNIT

Install cable and flexible pipe without tearing up paved areas.

The boring unit attachment bores horizontally to accommodate pipe or cable up to 4 inches in diameter. After boring, the attachment works to pull the pipe or cable through the hole. Mount the drive head, from the front of the loader, in three positions: on the center, right or left side. This allows the attachment to be positioned directly next to obstacles such as buildings and be placed exactly where boring operation is desired.

- Install electrical, telephone and television cables
- Install irrigation lines and flexible water pipes for sprinkler systems
- Bores up to 2 feet deep and up to 30 feet horizontally

Specifications

Weight (without bit)	130 lb. (59 kg)
Width	36.0 in. (914 mm)
Height	17.5 in. (445 mm)
Length	26.8 in. (680 mm)
Max. Recommended Boring Distance	30 ft. (9 m)



Approved Machines: Skid-Steer Loader, Mini Track Loader

BOX BLADE

GRADE WITH THE ACCURACY AND DURABILITY OF THE BOX BLADE.

BOX END WINGS

Help carry more when spreading materials such as sand or gravel. Includes adjustable and replaceable bottom edges.

FINGERTIP CONTROLS

Raise and lower the blade from the comfort of the cab with smooth fingertip controls for precise grading.

FOAM-FILLED TIRES

Designed for increased uptime protection, tires are filled with foam to eliminate flats. They also provide excellent flotation to keep the box blade moving smoothly over the work area.

OSCILLATING BOLSTER

Smooths dips and bumps in the surface, minimizing the effect of uneven ground and increasing first-pass accuracy.

REVERSIBLE CUTTING EDGE

Quickly flips over, providing a fresh blade to increase the life of the attachment and reduce edge-replacement costs.

Two versions offer accurate flatwork grading.

The box blade attachment is available in two models: manually operated and laser-controlled. Without the automated control system, the box blade excels at rough grading and landscaping, filling in low spots, or carrying and spreading materials with its box end wings to bring a surface close to grade. The front bolster on the box blade can be raised or lowered to control the height of the cutting edge. Lower the cutting edge to cut and raise it to dump the material.

With optional automatic grade control, you can achieve accuracy better than ± 0.25 inch. With the automatic laser control system, the laser receiver follows a plane of light emitted by the transmitter to control the height of the bolster and cutting edge. Quickly change from automatic to manual modes by clicking a button on the control handles. A kit is also available to convert manual box blades to automatic.

For more information, see the Grader Automation section on pages 38 and 39.

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information





BOX BLADE

Get a fast, accurate grade and cut down costly material waste with the Bobcat® box blade.



Scan the code to watch the box blade at work.

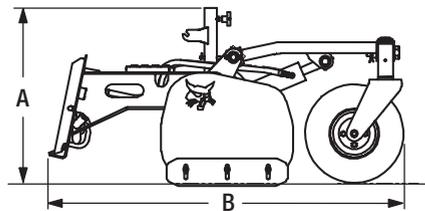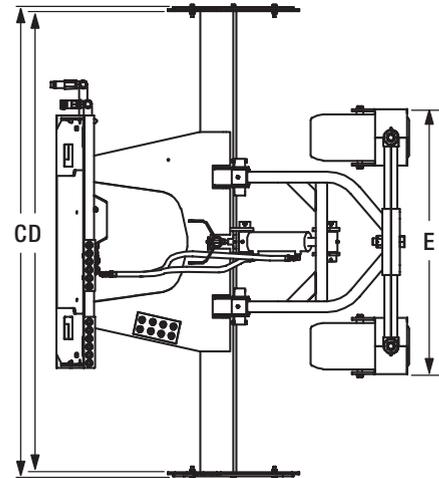

OPTIONS AND ACCESSORIES

- Automatic Grade Control (laser control system)**
 Automatically control the blade movement and keep the base material on-grade. The non-laser box blade upgrades with the laser kit.
- M-Series Loader Deluxe Instrumentation Panel**
 Provides real-time information to the operator, including blade position relative to target and distance above or below. Also allows operator to increment/decrement elevation from within the cab.

Specifications	Box Blade	Laser Box Blade
Operating Weight	980 lb. (445 kg)	1,020 lb. (464 kg)
Height (without laser pole) (A)	32.0 in. (813 mm)	32.0 in. (813 mm)
Length (B)	64.3 in. (1,633 mm)	64.3 in. (1,633 mm)
Overall Width (C)	85.5 in. (2,173 mm)	85.5 in. (2,173 mm)
Moldboard Width (D)	84.0 in. (2,134 mm)	84.0 in. (2,134 mm)
Bolster Width (E)	49.4 in. (1,255 mm)	49.4 in. (1,255 mm)
Moldboard Cutting Edge (reversible)	0.5 in. (13 mm) X 6.0 in. (152 mm)	0.5 in. (13 mm) X 6.0 in. (152 mm)
Grade Accuracy with Laser	N/A	±0.25 in. (6 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine



BRUSHCAT ROTARY CUTTER


GET A SMOOTH CUT IN UNEVEN TERRAIN.

With cutting widths from 66 to 80 inches and a cutting height of three inches, five new and improved Brushcat™ rotary cutter models easily cut overgrown grass, brush and small trees, and they transform undergrowth into mulch. Total maneuverability provides efficient cutting performance: on a slope, the Brushcat cutter moves parallel with the ground. There's no need to double back for an even cut. The Brushcat rotary cutter has a shorter deck than cutters from other manufacturers and has a tight turning radius. It's also easy to fit and load on a trailer.

- Standard 3-inch cutting height
- Complies with SAE J232 and ASAE S483 standards for industrial rotary cutters
- Oscillating pivot point
- Shorter deck



Model	66 in. Standard Flow	66 in. High Flow	72 in. Standard Flow	72 in. High Flow	80 in. High Flow
Operating Weight	1,437 lb. (651 kg)	1,437 lb. (651 kg)	1,500 lb. (680 kg)	1,500 lb. (680 kg)	1,581 lb. (717 kg)
Shipping Weight	1,885 lb. (855 kg)	1,885 lb. (855 kg)	2,116 lb. (960 kg)	2,116 lb. (960 kg)	2,148 lb. (974 kg)
Cutting Capacity	← Brush material up to 3 inches in diameter →				
Hydraulic Flow Range	15-24 gpm (57-91 L/min.)	24-36 gpm (91-136 L/min.)	15-26 gpm (57-98 L/min.)	24-40 gpm (91-151 L/min.)	24-40 gpm (91-151 L/min.)
Blade Tip Speed					
Min. Flow	12,526 ft./min. (3.82 km/min.)	12,521 ft./min. (3.82 km/min.)	10,903 ft./min. (3.32 km/min.)	10,903 ft./min. (3.32 km/min.)	12,013 ft./min. (3.66 km/min.)
Max. Flow	20,042 ft./min. (6.11 km/min.)	18,782 ft./min. (5.72 km/min.)	18,898 ft./min. (5.76 km/min.)	18,171 ft./min. (5.54 km/min.)	20,021 ft./min. (6.10 km/min.)
Cutting Width	66.0 in. (1,676 mm)	66.0 in. (1,676 mm)	72.0 in. (1,828 mm)	72.0 in. (1,828 mm)	80.0 in. (2,032 mm)
Cutting Height	3.0 in. (76 mm)	3.0 in. (76 mm)	3.0 in. (76 mm)	3.0 in. (76 mm)	3.0 in. (76 mm)
Overall Width (A)	70.3 in. (1,786 mm)	70.3 in. (1,786 mm)	76.3 in. (1,938 mm)	76.3 in. (1,938 mm)	84.3 in. (2,141 mm)
Overall Height (B)	26.5 in. (673 mm)	26.5 in. (673 mm)	26.5 in. (673 mm)	26.5 in. (673 mm)	26.5 in. (673 mm)
Overall Length (C)	67.2 in. (1,707 mm)	67.2 in. (1,707 mm)	70.4 in. (1,788 mm)	70.4 in. (1,788 mm)	73.8 in. (1,875 mm)
Deck Length (D)	61.1 in. (1,552 mm)	61.1 in. (1,552 mm)	64.3 in. (1,633 mm)	64.3 in. (1,633 mm)	67.7 in. (1,720 mm)

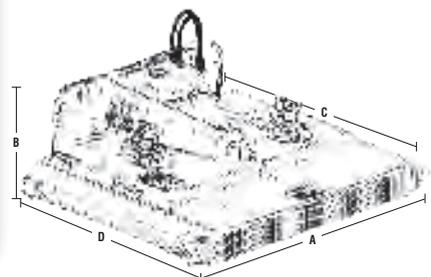

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



BRUSHCAT ROTARY CUTTER

MORE DURABLE THAN EVER BEFORE

A sturdier design around the Bob-Tach® attachment mounting system linkage points stands up to severe cutting conditions and rough ground.

A MORE MANEUVERABLE SHORT-DECK DESIGN

A shorter deck reduces weight, increases visibility and allows tighter turning. It also leaves more room on the trailer for hauling.

SELF-ADJUSTING, PIVOTING FLOTATION LINKAGE

Allows the deck to float fore and aft, left and right over ground contours, efficiently cutting thick grass and brush while staying parallel to the surface contours – even when cutting on a slope. The attachment adjusts itself over the changes in terrain – so any operator can maintain an even cut.

DUAL OFFSET MOTORS

Dual motors with two direct drives provide ample power within a smaller package for tough brush removal jobs.

OFFSET BLADE

Offset blades with a 1.5-inch blade overlap provide a wide, uniform cut.

DIRECT DRIVE

Efficiently transfers hydraulic power straight through to the blades. High-flow models increase available torque for even better performance in thick brush.

SMOOTH UNDER DECK

Grass clippings and debris won't stick or get caught underneath the deck.

FRONT DISC

Ensures the attachment traverses uneven terrain with minimal skips and gouging – with less operator input.

PATENTED BLADE SHUTOFF

Stops blade rotation when the rear roller is raised off the ground.

FRONT SAFETY CHAINS

Helps contain debris within deck that could be thrown during operation.

REAR TAPERED ROLLER

Shields debris from flying out of the back of the cutting deck and offers protection when driving near sensitive areas like air conditioning units, windows or people. It also adds maneuverability for gouge-free turns.

BOB-TACH MOUNTING SYSTEM

Quickly, easily connect and disconnect the Brushcat™ rotary cutter with the Bob-Tach mounting system. Spend less time on attachment changes and more time on the job.

OPTIONS AND ACCESSORIES

- **Offset Blade Kit:** Provides 4-inch cutting height.
- **Motor Covers:** Protect your uptime by shielding the Brushcat rotary cutter motors from grass, branches, dust and other debris.
- **Front Rollers:** Allow the attachment to traverse uneven terrain with minimal skips and reduce operator fatigue.



PERFORMANCE COMPARISON

Scan the code to compare the performance of our Brushcat rotary cutter to other brands.



BRUSH SAW

Cut away brush & clear small trees.

Clear the way with the Bobcat® brush saw attachment. This heavy-duty attachment saws off trees flush with the ground or even a little below the surface. Position the boom manually in up to three positions – center, or 12 degrees left or right – to operate with excellent visibility of the cutting, clearing action.

Brush Saw*

Operating Weight	590 lb. (268 kg)
Width	48.0 in. (1,219 mm)
Length	85.0 in. (2,159 mm)
Height	29.5 in. (750 mm)
Cutting Wheel Diameter	28.5 in. (724 mm)
Max. Wheel Tip Speed	2,985 ft./min. (910 m/min.) @ 22 gpm
Number of Teeth	16
Degree of Angle (right or left)	12 deg.
Hydraulic Flow	15-24 gpm (57-91 L/min.)

*Note: A Special Applications Kit must be installed on the loader when operating the brush saw attachment.

- Cut firebreaks
- Clear pastures and grasslands
- Clean road and utility line rights-of-way

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.





BUCKET

The toughest WORK DEMANDS THE toughest-built BUCKETS.



STRENGTH CHALLENGE

Your bucket must withstand severe applications. In this test, see how competitive buckets react to the forces placed upon them by a loader. See which bucket has the least deflection and the most strength.

More bucket comparisons:
Bucket Backs
Bucket Bottoms
Customization




For lighter-duty jobs:

GENERAL PURPOSE AND DIRT BUCKETS

For daily use with smaller Bobcat® loaders or occasional use on some of our larger machines, you can't beat the versatility of Bobcat general purpose and dirt buckets. The skid bar design provides wear protection to the bucket bottom, backs up the cutting edge and adds strength to the bottom of the bucket. A flat back on the bucket exterior provides a secure mount for the Bob-Tach® system. A round back inside the bucket enhances loading and clean out. A replaceable 0.5 x 4.0-inch high carbon steel cutting edge provides a long bucket life. Both buckets offer value-minded owners of older Bobcat equipment, or those who use buckets in light-duty or lower annual use applications, an alternative to standard buckets.


GP

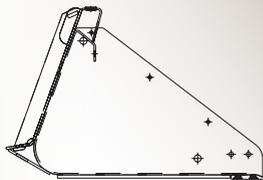

GENERAL PURPOSE

The standard bucket for Toolcat™ machines and a good choice for low-hour users on some larger loaders. General purpose buckets are ideal for light-duty grading and leveling applications as well as material handling.

D



BUCKET, DIRT – LOADERS

The standard bucket on smaller Bobcat loaders. Dirt buckets offer fair cutting edge visibility.

Benefits	Fair	Good	Excellent
Bucket Breakout Force	C/I	D LP	GP
Cutting Edge Visibility		GP LP	D C/I
Length of bucket bottom	D	C/I	GP LP

OPTIONS AND ACCESSORIES

Bolt-On Teeth: Help chew through tough digging conditions
Bolt-On Cutting Edge: Provides longer life to your bucket



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information




BUCKET

For heavy-duty jobs:

CONSTRUCTION/INDUSTRIAL AND LOW PROFILE BUCKETS


With more durability for your toughest jobs, nothing outperforms our hard-working bucket lineup. A “waffle” type skid plate backs up the cutting edge and adds strength to the bottom of the bucket for longer life – with minimal additional weight. Top and bottom bucket sections are a formed channel design to provide extra strength and durability. A reinforced bucket back is built to perform better, longer. A high-carbon steel, 0.75 x 6.0-inch cutting edge provides longer wear in extreme applications.

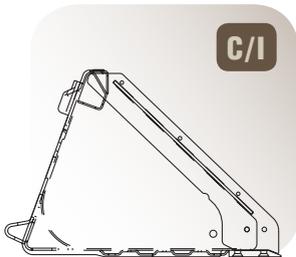

C/I

BUCKET, CONSTRUCTION INDUSTRIAL – LOADERS


The standard bucket on most Bobcat loaders. Ideal for everything from tough digging to material handling.

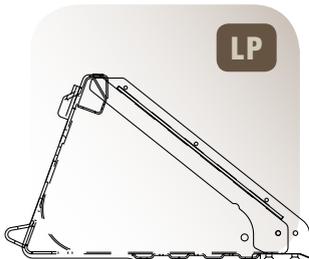

LP

BUCKET, LOW PROFILE – LOADERS

This is the most popular Bobcat bucket. Low profile buckets are ideal for grading, leveling, carrying, loading and other material handling.

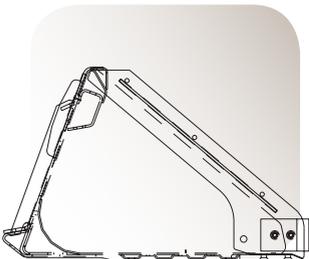

BUCKET, HEAVY/SEVERE-DUTY CONSTRUCTION/ INDUSTRIAL (C/I) – LOADERS

Designed for larger Bobcat loaders and compact track loaders. These buckets are built even stronger than C/I and low profile buckets.

- Stronger mounting frame
- Double-walled top crossmember
- Thicker and taller side cutting edges
- More capacity than C/I or low profile buckets
- 0.75 x 8.0 inch (HD) or 1.0 x 8.0 inch (SD) high-carbon steel cutting edge
- Higher back and longer bottom




Most Bobcat buckets can be equipped with grapple attachments for handling loose or hard-to-handle materials.

Customize your bucket for the job.


Check out Bobcat bucket accessories on page 28.

Specialty Buckets:

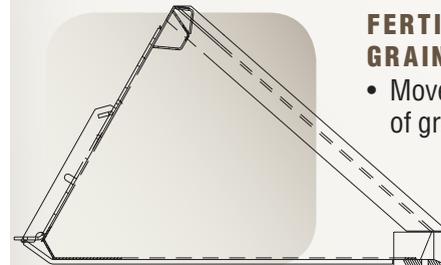

FERTILIZER AND GRAIN BUCKETS

- Move large volumes of granular material
- Minimum spillage thanks to an increased roll-back feature

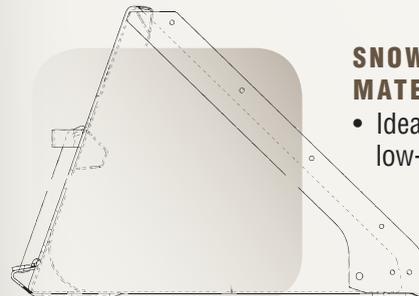

SNOW AND LIGHT MATERIAL BUCKETS

- Ideal for handling large, low-density materials
- Large-capacity buckets with a high-back design

- Sizes range from 68 to 100 inches wide



ROCK BUCKETS

- Skeletal design collects rocks while leaving soil behind
- Heavy-duty models ranging from 62 to 82 inches wide



BUCKET ACCESSORIES



CUSTOMIZE *your buckets with bolt-on options.*

TILT-TATCH DEVICE

Oscillate
attachments
15 degrees
right or left.



Get more work out of Bobcat® attachments with an effective 15-degree twist to the right or left. The Tilt-Tatch™ unit connects as an interface between the carrier and non-hydraulic attachments and is controlled directly from the operator's seat.

- Load or unload pallets of materials such as lumber, shingles, siding, fencing and block
- Dig a drainage ditch with the corner of a bucket
- Cut a level path on a hillside
- Keep a load level on uneven terrain



Specifications

Operating Weight	320 lb. (145 kg)
Length	4.3 in. (109 mm)
Width	48.0 in. (1,219 mm)
Height	20.4 in. (518 mm)
Oscillation	± 15 deg.

Approved Machines: Skid-Steer Loader, Compact Track Loader, Toolcat™ Utility Work Machine



Bobcat®

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

BUCKET BITE® TOOTH BAR

Quickly attaches to smooth-lip buckets and bolt-on cutting edge to help chew through tough digging conditions.

BOLT-ON TOOTH SHANKS WITH REPLACEABLE TEETH

Teeth made of heavy-duty cast steel keep going when the going gets tough. Multiple tooth sizes available.

BOLT-ON CUTTING EDGE

Provide longer life to your bucket.

BOLT-ON CORNER CUTTING EDGE

Protect the corners of your bucket with these beveled cutting edges. Available in single or double bevel.

BUCKET SPILL GUARD

Bolts onto the top of your bucket to reduce material boiling or falling over the back of the bucket.

POLYURETHANE CUTTING EDGE

- Less likely to damage concrete, asphalt, pavers and other delicate surfaces
- Longer service life than rubber
- Extremely resilient, therefore absorbing impact and conforming to the surface

REZLOH® CUTTING EDGE

- Get the benefits of teeth and a cutting edge in a single bucket
- Improve digging efficiency
- Eliminate the need to change between toothbars, multiple buckets or specific edges

GRAPPLES

Most buckets can be equipped with grapple attachments for handling loose or hard-to-handle materials.

For more information



BUCKET ACCESSORIES



Replacement Teeth



Bucket Spill Guard



Polyurethane Cutting Edge



Bolt-On Cutting Edge



Bucket Bite[®] Tooth Bar



Bolt-On Corner Cutting Edge



Rezloh[®] Cutting Edge



Bolt-On Side Guard



Grapple Attachments

**REPLACEMENT
CUTTING EDGES**
*will help you keep your
competitive edge.*





CHIPPER



Don't haul branches and other debris to the road.
Chip it on the spot!

Be prepared for a big cleanup! This chipper goes where the trees fall and the branches are down. Using a powerful disk chipping action, this attachment continuously chips materials: trees, limbs, branches, saplings and more – up to 5 inches in diameter. It's ideal for tree removal, pruning services, municipalities, parks and recreation, rentals and personal property maintenance.

Remote Attachment Control – Safely start and stop the machine and chipper from outside the loader.

Specifications	5A Chipper	8B Chipper
Operating Weight	1,145 lb. (519 kg)	1,660 lb. (753 kg)
Continuous Chipping Size	Up to 3.0 in. (76 mm) diameter material	Up to 5.0 in. (127 mm) diameter material
Feed Table Height	23.5 in. (597 mm)	25.4 in. (645 mm)
Discharge Chute Height	92.0 in. (2,337 mm)	93.3 in. (2,370 mm)
Feeder Opening	5.0 in. (127 mm)	9.2 in. (234 mm)
Blades	4 reversible tool steel blades	4 reversible tool steel blades
Dual Mounting Locations	Feed from front or right side of loader	Feed from front or right side of loader
Discharge Chute (includes adjustable deflector)	Rotates 360 deg.	Rotates 360 deg.

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine

COMBINATION BUCKET

USE AS A BUCKET,
AS A GRAPPLE,
OR FOR DOZING,
**LEVELING AND
SPREADING MATERIAL.**

- Doze, grapple, level, dig, load and dump with this versatile bucket.
- 62- to 84-inch bucket widths.
- Larger sizes have replaceable cutting edges on the dozer and back of clamshell.

This multi-use attachment can be used as a bucket for loading, carrying and dumping; as a grapple for handling odd-shaped objects; or for dozing, leveling and spreading material with the clamshell open.

BOLT-ON CORNER CUTTING EDGES

Protect the corners of your bucket; reversible.

REINFORCED BUCKET BOTTOM AND CLAMSHELL


Improves strength and rigidity.

INTERLOCKING SERRATED GRAPPLE EDGES

Hold objects securely – even heavy or oddly-shaped materials.

Customize your bucket for the job.

Check out Bobcat® bucket accessories on page 28.

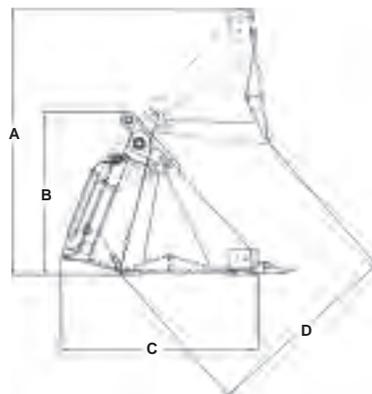

Scan the code to watch the combination bucket in action.



Specifications	62 in.	68 in.	74 in.	80 in.	84 in.
Overall Width	62.5 in. (1,588 mm)	68.5 in. (1,740 mm)	74.5 in. (1,892 mm)	81.4 in. (2,068 mm)	85.4 in. (2,170 mm)
Heaped Capacity	10.7 ft. ³ (0.3 m ³)	11.8 ft. ³ (0.3 m ³)	13.4 ft. ³ (0.4 m ³)	18.3 ft. ³ (0.5 m ³)	19.3 ft. ³ (0.6 m ³)
Weight	807 lb. (366 kg)	852 lb. (387 kg)	898 lb. (4,078 kg)	1,075 lb. (488 kg)	1,109 lb. (503 kg)
Number of Teeth	7	7	8	8	8
Open Bucket Height (A)	39.5 in. (1,004 mm)	39.5 in. (1,004 mm)	39.5 in. (1,004 mm)	46.4 in. (1,178 mm)	46.4 in. (1,178 mm)
Closed Bucket Height (B)	28.3 in. (719 mm)	28.3 in. (719 mm)	28.3 in. (719 mm)	33.6 in. (853 mm)	33.6 in. (853 mm)
Length (C)	34.6 in. (879 mm)	34.6 in. (879 mm)	34.6 in. (879 mm)	38.9 in. (987 mm)	38.9 in. (987 mm)
Max. Bucket Opening (D)	28.7 in. (729 mm)	28.7 in. (729 mm)	28.7 in. (729 mm)	36.2 in. (919 mm)	36.2 in. (919 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



Bobcat®

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



COMBINATION BUCKET

**OPEN THE CLAMSHELL TO SPREAD
YOUR MATERIAL EVENLY.**



**USE THE COMBINATION BUCKET
AS A STANDARD BUCKET.**



**USE THE COMBINATION BUCKET
AS A GRAPPLE.**



OPEN THE CLAMSHELL TO DUMP.



**OPEN THE CLAMSHELL AND ROLL
THE BUCKET FORWARD TO CREATE
A BOX BLADE EFFECT.**



**OPEN THE CLAMSHELL
AND USE AS A DOZER.**





CONCRETE MIXER

Mix concrete where and when you need it, without waiting for a truck.

Don't waste time or effort running hose. Bring the mixer to the mortar, gravel or sand and water, then place concrete immediately, right where you need it. The concrete mixer transports, mixes and dumps concrete faster than with a traditional stand-alone mixer and wheelbarrow – even in hard-to-reach areas. Its small size makes it perfect for sidewalks, driveways, finish work, fence posts and footings or floors of small buildings.

Specifications

Weight	440 lb. (200 kg)
Length	43.0 in. (1,092 mm)
Width	45.0 in. (1,143 mm)
Height	40.0 in. (1,016 mm)
Recommended Drum Speed	20 rpm @ 11 gpm (34-76 L/min.)
Batch Capacity	6.9 ft. ³ (0.19 m ³)
Rotation	Bi-rotational
Chain	#50 std. roller
Hydraulic Flow Requirement	9-20 gpm (34-76 L/min.)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader

Remote Attachment Control
Safely start and stop the machine and drum rotation from outside the loader.

CONCRETE PUMP

Pour concrete in difficult-to-reach sites.

No more mud buggies, loaders with buckets, wheelbarrows, shovels or chutes. Depending on working conditions, this attachment can pump concrete as far as 250 feet horizontally and up to two stories vertically. Standard-flow loaders can place concrete up to 18 cubic yards per hour. A high-flow loader can place up to 30 cubic yards per hour.

Optional Remote Control Kit

Operator can start the pump from the ground without entering and exiting the loader.



*Per hour volume output will vary depending on mix design, slump, line size used and jobsite conditions.

Specifications

Width	47.9 in. (1,216 mm)
Length	102.9 in. (2,615 mm)
Height	54.9 in. (1,395 mm)
Weight	2,200 lb. (998 kg)
Swing Tube Outlet Diameter	5.0 in. (127 mm)
Concrete Cylinder Diameter	6.0 in. (152 mm)
Concrete Cylinder Stroke	24.0 in. (607 mm)
Hydraulic Flow Range	15-40 gpm (57-150 L/min.)
Pumping Rate	Up to 30 yd. ³ (23 m ³)*
Material Cylinder Diameter	3.0 in. (76 mm)
Max. Aggregate Size	1.5 in. (38 mm)
Vertical Pumping Height	Up to 50 ft. (15 m)
Horizontal Pumping Distance	250 ft. (76 m)
Hopper Capacity	10 ft. ³ (0.28 m ³) with fwd./rev. agitator

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader

DIGGER



Powerful, efficient digging IN FORWARD AND REVERSE.

Like a shovel, the digger attachment can be used in removing rocks and stumps, transplanting bareroot trees and shrubs, pruning roots, digging trenches and loosening hard-packed soil. Since it is mounted on a loader, the digger attachment works much faster, saving time and energy.

Specifications

	Dig Depth	Weight
12S	27.0 in. (686 mm)	200 lb. (91 kg)
25-inch	48.0 in. (1,219 mm)	290 lb. (132 kg)
30-inch	48.0 in. (1,219 mm)	307 lb. (139 kg)
36-inch	48.0 in. (1,219 mm)	325 lb. (147 kg)

Approved Machines: Skid-Steer Loader, Compact Track Loader, Mini Track Loader



Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



DOZER BLADE

Turn your loader

OR UTILITY WORK MACHINE INTO A MINI CRAWLER.

Ideal for construction and landscaping, the Bobcat® dozer blade attachment excavates and grades material. The blade moves and pushes large amounts of material quickly and easily, accomplishing jobs that would otherwise require dedicated equipment. Adjustable skid shoes provide depth control as well as forward and reverse grading action. Choose from a 54-inch width on up to 96 inches.

6-WAY ADJUSTABLE BLADE

Angles ± 30 degrees and oscillates up to ± 10 degrees, with electric-over-hydraulic controls for on-the-fly adjustments. (54-inch blade has 5 degrees of free-floating oscillation).

ADJUSTABLE DEPTH GUIDES

Mounted on the dozer blade attachment, adjustable skid shoes guide and control the depth of the dozer blade.

OPERATE IN FORWARD OR REVERSE

Operates both in forward and reverse, delivering optimum grading action in either direction.

FINGERTIP CONTROLS

Fingertip controls allow for easy, efficient and comfortable attachment adjustment.

CAST DESIGN


Designed for handling the toughest applications, the 96-inch dozer blade model features an all-cast design for maximum strength. Combined with the tractive effort of a compact track loader, it's just what you need for productive dozing.

HYDRAULIC ANGLE

Change the hydraulic angle of the blade to efficiently direct spoil where you want it.

REVERSIBLE CUTTING EDGE

Increases the versatility of the attachment and increases uptime – so you can go more time between blade exchanges.

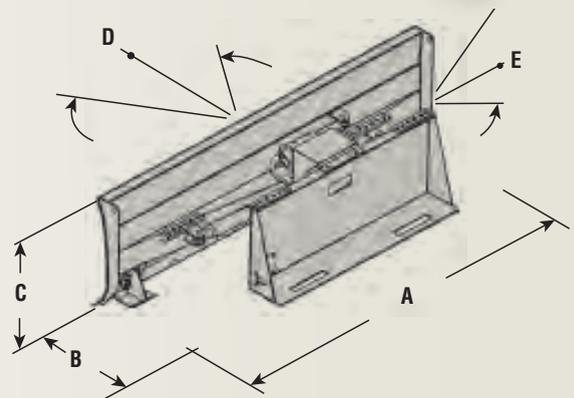

- Create runoff grades
- Sculpt landscape areas
- Backfill around foundations
- Level, pile or grade loose dirt, gravel or sand

Specifications	54 in.	80 in.	90 in.	96 in.
Weight	310 lb. (141 kg)	950 lb. (431 kg)	987 lb. (449 kg)	1,580 lb. (718 kg)
Width (A)	54.0 in. (1,372 mm)	80.0 in. (2,032 mm)	90.0 in. (2,286 mm)	96.0 in. (2,438 mm)
Length (B)	28.7 in. (728 mm)	32.0 in. (813 mm)	32.0 in. (813 mm)	34.8 in. (884 mm)
Blade Height (C)	20.0 in. (508 mm)	24.7 in. (627 mm)	24.7 in. (627 mm)	25.2 in. (640 mm)
Working Width	46.8 in. (1,189 mm) Fully Angled	69.3 in. (1,760 mm) Fully Angled	78.0 in. (1,982 mm) Fully Angled	83.5 in. (2,121 mm) Fully Angled
Angle (D)	± 30 deg.	± 30 deg.	± 30 deg.	± 30 deg.
Oscillation (E)	± 5 deg.	± 8 deg.	± 8 deg.	± 10 deg.
Cutting Edge	0.4 in. x 4.0 in. (13 mm x 102 mm) Reversible	0.5 in. x 6.0 in. (13 mm x 152 mm) Reversible	0.5 in. x 6.0 in. (13 mm x 152 mm) Reversible	0.6 in. x 6.0 in. (16 mm x 152 mm) Reversible
Skid Shoes	Adjustable	Adjustable	Adjustable	Adjustable

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



DROP HAMMER

DUMPING HOPPER



Demolish parking lots, driveways and other flat concrete slabs.

The drop hammer delivers more than 3,600 foot-pounds of impact energy combined with a fast cycle time of 20 blows per minute to break and demolish concrete. It fractures material below, leaving the surface free of jagged debris. Compared to standard hydraulic breakers, the drop hammer generates little vibration or noise, meaning less wear on the machine and less noise for the operator and bystanders.

Specifications

Overall Weight	1,925 lb. (873 kg)
Weight of Hammer	1,140 lb. (517 kg)
Height (hammer fully raised)	74.0 in. (1,880 mm)
Length	29.0 in. (737 mm)
Hammer Stroke	38.0 in. (965 mm)
Impact Energy Rating	3,600 ft.-lb. (4,881 J)
Required Flow	15-23 gpm (57 L/min.)
Stroke Rate Per Minute	20
Max. Concrete Thickness	14.0-18.0 in. (356-457 mm)
Min. Concrete Thickness	5.0 in. (127 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader



Move more material and go where dump trucks can't.

The dumping hopper mounts easily on a Bobcat loader and can be transported, detached and parked in construction sites, backyards, buildings or wherever it is needed to receive or dump materials. Large-capacity, easy-to-fill hopper empties quickly and easily, saving time on back-and-forth trips between a dumpsite or receiving truck.

Specifications

	Model 10	Model 25
Weight	665 lb. (302 kg)	1,190 lb. (540 kg)
Height	40.0 in. (1,016 mm)	40.0 in. (1,016 mm)
Capacity		
Struck	25.7 ft. ³ (0.73 m ³)	67.5 ft. ³ (1.92 m ³)
Heaped	29.7 ft. ³ (0.84 m ³)	87.9 ft. ³ (2.50 m ³)
Length	83.0 in. (2,108 mm)	83.0 in. (2,108 mm)
Width	36.0 in. (914 mm)	84.0 in. (2,133 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader



MORE WAYS TO RULE THE ROAD

Nobody offers more solutions to do tough jobs with fewer machines. Scan the code or visit Bobcat.com/Road to see all the Bobcat® attachments.



One Tough Animal.



Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



FLAIL CUTTER

With a cutting width of 79 inches, the flail cutter delivers excellent cutting and mulching action for materials up to 3 inches in diameter. The flotation linkage and compact deck length allow the flail cutter to float over ground contours, maintaining surface contact for optimal cutting performance.

This efficient attachment has a thick steel deck design that protects the attachment and provides maximum strength for tough clearing jobs. It excels in applications such as agriculture, landscaping, utility and rental. Other applications include maintenance around personal property, construction sites, power lines, road rights-of-way, trails, etc.

CLEAR BRUSH & SMALL TREES. Distribute cut materials evenly.

- Clear brush and small trees
- Cut, mulch and spread a fine finish
- Excels at cutting long grass



VARIABLE DISPLACEMENT MOTOR

Maximize your machine's power. The variable displacement motor allows you to match your carrier's capabilities with a simple adjustment of the hydraulic flow. This feature is critical in the rental market. Use on machines with hydraulic flows ranging from 17 to 37 gpm.

THREE CUTTING HEIGHTS

Adjustable cutting height for a variety of terrains and brush types.

AUTOMATIC BLADE SHUT-OFF DEVICE

When the flail cutter is raised off the ground, flail rotation stops to prevent debris from being thrown.

ADJUSTABLE REAR GATE

Open or close to vary the size of discharge material from small (for mulching applications) to coarse (for high-performance cutting).

FLOATING LINKAGE

The flail cutter floats over ground contours, maintaining surface contact for the best possible cutting performance.

FULL-WIDTH, ADJUSTABLE TAPERED REAR ROLLER

Provides greater turning ability during operation, making it easier to maneuver the flail cutter in tight areas.

THICK STEEL DECK


Designed with 0.25-inch steel, the deck is designed for maximum strength and durability.

COMPLIANCE

Complies with the SAE J1001 standard for industrial flail mowers.

HEAVY-DUTY FRONT RUBBER FLAP

Helps contain debris.

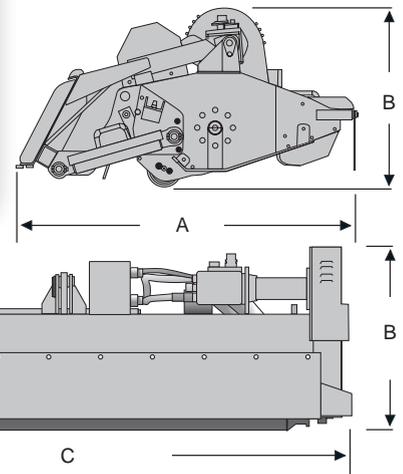

Specifications

Operating Weight	1,630 lb. (739 kg)
Length (A)	57.4 in. (1,458 mm)
Height (B)	29.7 in. (754 mm)
Cutting Width	79.0 in. (2,007 mm)
Overall Width (C)	91.0 in. (2,311 mm)
Flow	17-37 gpm* (64-140 L/min.)
Hammers	21
Cutting Capacity	Brush material up to 3.0 in. diameter
Blade Tip Speed	8,200 ft./min. @ 2,000 rpm, and 9,000 ft./min. @ 2,200 rpm

*For optimum performance, the flail cutter is best utilized with 28 to 37 gpm carrier hydraulic flows.



Scan the code to see the flail cutter in action.

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine



FORESTRY CUTTER

- **Clear trees and brush for:**
 - Pre/Post-disaster mitigation
 - Utility line and road right-of-way maintenance
 - Orchard and vineyard maintenance
 - Site preparation
- **Cut firebreaks**
- **Clean lots**
- **Maintain property**
- **Complete fuel reduction for wildland fire protection**

Rip unwanted trees &

The forestry cutter turns unsightly trees and overgrowth into mulch. The compact size of the forestry cutter allows you to complete any type of tree removal job, whether clearing every tree in an area or selectively thinning stands.

In just two steps, you can shred trees from top to bottom. First, bring the uppermost limbs to the ground by punching into the tree with the forestry cutter. Then, lower the attachment over the trunk to rip the entire tree to shreds and add organic material to the soil. The forestry cutter's tube-style drum and spiral tooth pattern allow one tooth to engage at a time, so operation is smooth and less horsepower is required to do the job.



Training Resources

Train operators and technicians in the safe operation and servicing of Bobcat® equipment. Operator training courses, safety videos and other training materials are available at your Bobcat dealer's parts department or online at Bobcat.com/safety



Bobcat®

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



FORESTRY CUTTER

OPTIONS AND ACCESSORIES

Two-Speed Motor: Increases efficiency with faster startup and recovery times. Additional power is provided to the drum when mulching material on the ground.

Front Gate: Lowering the optional front gate reduces front discharge of material and promotes longer processing into finer mulch. The gate can be quickly added to any Bobcat® forestry cutter.



overgrowth to shreds.

LOW NUMBER OF TEETH

Provides fast knockdown of trees and low-cost replacement.

PRESSURE GAUGE

Visible from the seat to help the operator run the attachment at peak efficiency.

SAFETY CHAINS

Reduce debris thrown to the rear.

SPIRAL TOOTH PATTERN

Allows one tooth to engage at a time for smoother operation and less horsepower demand.

COUNTER COMBS

Provide the ability to do fine mulching and provide wear protection for the rear of the housing.

ROTOR BRAKE

Stops from full speed in 10 seconds or less when the forestry cutter's hydraulics are deactivated.

DOUBLE-TIPPED CARBIDE TEETH

Efficiently rip through hard and soft woods, providing long life and uptime protection for the attachment.

ADJUSTABLE PUSH BAR

Has three positions to accommodate the operator's preferred setting. Gathering feature pulls brush and trees toward the center of the drum.

Forestry Applications Kit



Designed to protect you and your investment in the toughest conditions, the forestry applications kit must be installed on the loader to operate the forestry cutter.

- A Forestry Door** (0.75-inch laminated polycarbonate)
- B Front and Rear Light Guards**
- C Hydraulic Quick Coupler Guard**
- D Fire Extinguisher**
- E Level II FOPS** (meets ISO 3449)
- F Muffler Guard**
- G Engine Compartment Seal Kit**
- H Top and Rear Windows**
- I Polycarbonate Side Window Kit**



Required Forestry Applications Kit: Protect Your Operator, Protect Your Machine

Scan the code to see how the Bobcat forestry cutter design and quality compares to other brands.

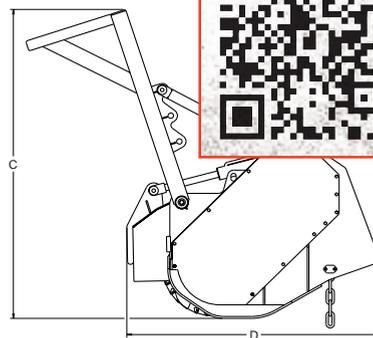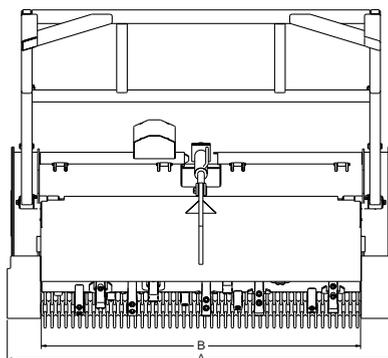

Specifications	50 inch	50 inch 2-speed	60 inch	60 inch 2-speed
Overall Width (A)	62.1 in. (1,577 mm)	62.1 in. (1,577 mm)	73.3 in. (1,862 mm)	73.3 in. (1,862 mm)
Cutting Width (B)	50.0 in. (1,270 mm)	50.0 in. (1,270 mm)	60.0 in. (1,524 mm)	60.0 in. (1,524 mm)
Height (C)	59.9 in. (1,521 mm)	59.9 in. (1,521 mm)	59.9 in. (1,521 mm)	59.9 in. (1,521 mm)
Length (D) <i>(push bar in rear position)</i>	47.7 in. (1,212 mm)	47.7 in. (1,212 mm)	47.7 in. (1,212 mm)	47.7 in. (1,212 mm)
Operating Weight	2,185 lb. (991 kg)	2,176 lb. (987 kg)	2,364 lb. (1,072 kg)	2,234 lb. (1,013 kg)
Operating Weight with Front Gate	2,227 lb. (1,010 kg)	2,218 lb. (1,006 kg)	2,497 lb. (1,132 kg)	2,367 lb. (1,074 kg)
Number of Teeth	24	24	30	30
	Max. Tree Diameter			
	Continuous use		4-5 in. (102-127 mm)	
	Intermittent removal		7-9 in. (178-229 mm)	
	Occasional removal		10-12 in. (254-305 mm)	

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader

Forestry Applications Kit required.

GRADER AUTOMATION

NEAR-PERFECT GRADING TO EARN AND SAVE THOUSANDS.

If you're below grade, the extra concrete it takes to finish the job can cost you thousands of dollars. Bobcat offers a more profitable way to grade. Our laser-guided and sonic/slope sensor grading systems provide precision and accuracy that can potentially pay for themselves in just one job.



LASER-GUIDED SYSTEMS

Laser-guided grading offers unrivaled material savings on new construction sites and other open areas. A laser transmitter emits a plane of laser light that mirrors the completed jobsite. The box blade receiver controls up-and-down movement for the entire blade, using the laser transmitter as its reference point. The graders utilize two laser receivers mounted on each end of the moldboard to move each side up and down independently, which means you can move across the surface from any direction. Operators can concentrate on traveling across the grading site while the system keeps the blade constantly on-grade, adjusting the blade position automatically. Laser-guided systems are available on the box blade as well as grader models 84, 96 and 108.


Laser transmitters and rod-mounted laser receivers can also quickly determine the amount of material that needs to be added or removed from the site.

- Control grader or box blade automatically
- Achieve accurate finish grading
- Excellent for concrete flatwork
- Grade single- and dual-slope surfaces
- Includes a manual override function
- Quick mounting; fast setup and removal

Bobcat® precision grading technology isn't just profitable. It's easy. Even inexperienced operators can achieve near-perfect accuracy. Operators concentrate on the machine's travel, rather than the blade position, and there is no need for a crew to continually check grade on the jobsite. You need fewer people to do the job. You save money on expensive materials, such as concrete. Better profitability and faster, more accurate grading is as simple as clicking a button on the loader controls.

Choose from three transmitter models.

Bobcat offers three laser transmitters that can create flat-plane, single-slope and dual-slope surfaces, depending on the model. All models feature two-way radio remote control to allow adjustments from across the jobsite or from within the machine.

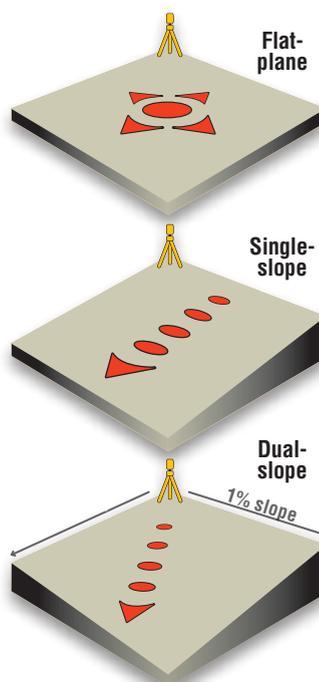

FLAT-PLANE OR SINGLE-SLOPE

The laser-guided box blade and graders work equally well in this application. The box blade must travel up/down the slope. The grader can travel in any direction.

DUAL-SLOPE

The laser-guided grader will provide the best results in this application.

BLR2 RECEIVER

This laser receiver delivers rapid updates to the control valve on the attachment (up to 20 times per second) for high-accuracy grading. Indicators and lights on the face of the receiver also provide constant information to the operator. To make grade changes quickly from inside the cab, the "on-grade" setting of the receiver can be moved up or down – up to 2 inches with certain machine options – for fast, accurate results.



For more information



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.



GRADER AUTOMATION



SONIC TRACER/SLOPE SYSTEMS

Grading with a sonic tracer/slope sensor system provides a major efficiency advantage on more complicated jobsites where columns or other obstacles would block a laser transmitter.

Available for use with 96 and 108 grader models, the sonic/slope system will follow the terrain below the sonic tracer (mounted on one side) and maintain a consistent, predetermined cross-slope. Time and labor savings add up quickly while grading around and within structures (such as parking garages) as well as on roads and paths or following a stringline.

- Achieve accurate finish grading
- Excellent for concrete flatwork
- Includes a manual override function
- Perfectly grade paths for golf carts, bicycles, etc.
- Quick mounting; fast setup and removal

Deluxe Instrumentation Panel

Used as a control box to operate either type of blade automation system, the deluxe instrumentation panel allows the operator to set the parameters of the grading system, receive real-time information, make adjustments and even switch to manual operation.

When the sonic tracer is disabled, the system is also capable of operating only the cross-slope in automatic mode. Manually control the side of the blade on which the sonic tracer is mounted, while the cross-slope sensor automatically maintains the correct cross-slope across the blade. This is especially useful when making first passes to provide a smooth surface for the sonic tracer to follow on the next pass.

THE SONIC TRACER

Mounted on either side of the moldboard, the sonic tracer uses ultra sonic signals to maintain a distance between it and an object below, such as a stringline, ground, or curb and gutter. The sonic tracer only moves the elevation cylinder for the side of the blade on which it is mounted. Operators simply place the sonic tracer over the top of an object that serves as a reference point, then set the blade depth as needed.

CROSS-SLOPE SENSOR

Moves the opposite side of the blade to maintain a set cross slope entered by the operator.

ROTATION AND MAINFALL SENSORS

Provide correcting information to the slope sensor when traveling up or down hills.



Scan the code and watch Bobcat blade automation systems in action.



GRADER BLADE

Achieve a consistent, accurate grade with the Bobcat® grader attachment. Even delicate tasks can be completed with powerful precision. The grader attachment has a blade that moves six or eight different ways to grade any surface. The bolster oscillates to minimize the effect of uneven ground, delivering consistent grading performance in a variety of environments.

DIRT SHIELD

Mounted over the moldboard on larger models, the dirt shield keeps pushed material moving forward.

FLOTATION TIRES

Excellent flotation keeps the grader moving smoothly over the work area.

SIDE SHIFT

Grade next to buildings, poles and other obstacles with ease. Manual side shift on smaller models moves the blade up to 12 inches to the left or right. The hydraulic side shift on larger models moves up to 13 inches to the left or right.

OSCILLATING BOLSTER

The bolster oscillates to the left or right to minimize the effect of uneven ground.

PROPORTIONAL HYDRAULIC VALVE

The moldboard can be raised or lowered at three different speeds, meaning operation can be more closely matched to the speed of the loader. It also provides finer control with automatic grading solutions.

BOLT-ON REVERSIBLE CUTTING EDGE

When the edge wears out, simply flip it over for increased uptime.

OPTIONS AND ACCESSORIES

- **Automatic Control Systems** Automatically moves the blade up or down to keep the base material exactly on-grade. Grader is laser-ready or sonic-tracer/slope-sensor-ready.



- **Bolt-On End Wing Kit** Helps to carry more material when fine grading or spreading materials such as sand or gravel. Turns the grader into a box blade, eliminating the need for an additional attachment. For larger graders only.

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

Grade with precision and control.

Scan the code
to watch the
grader work.




For more information



GRADER BLADE

Better than ± 0.25 -inch accuracy with automatic grade control.

Choose the laser-guided system or the sonic tracer/slope sensor kit to get efficient operation and quicker reaction for profit-boosting precision. With the laser system, the farther the blade is from grade, the more quickly it will move to grade. With the sonic tracer/slope sensor system, the grader follows the terrain below the sonic tracer (mounted on one side) and maintains a consistent, predetermined cross-slope. This system also works well on jobsites where obstacles prevent complete visibility between laser transmitter and receivers.

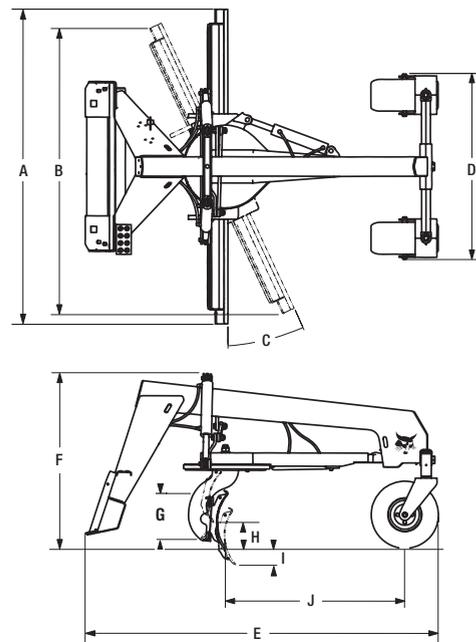

Specifications	Grader 84	Grader 96	Grader 108
Operating Weight	1,375 lb. (625 kg)	2,788 lb. (1,265 kg)	2,861 lb. (12,98 kg)
Width (A)	84.0 in. (2,134 mm)	96.0 in. (2,438 mm)	108.0 in. (2,743 mm)
Width, Fully Angled (B)	76.1 in. (1,933 mm)	83.3 in. (2,116 mm)	93.7 in. (2,380 mm)
Blade Angle (C)	± 25 deg.	± 30 deg.	± 30 deg.
Bolster Width (D)	49.4 in. (1,255 mm)	57.8 in. (1,468 mm)	57.8 in. (1,468 mm)
Overall Length (E)	94.5 in. (2,400 mm)	104.0 in. (2,642 mm)	104.0 in. (2,642 mm)
Overall Height (F) (without laser poles)	46.7 in. (1,186 mm)	59.9 in. (1,522 mm)	59.9 in. (1,522 mm)
Blade Height (G)	14.9 in. (378 mm)	17.0 in. (432 mm)	17.0 in. (432 mm)
Max. Lift (H)	6.8 in. (173 mm)	6.8 in. (173 mm)	6.8 in. (173 mm)
Max. Cut Depth (I)	4.5 in. (114 mm)	7.2 in. (188 mm)	7.2 in. (188 mm)
Blade Base (J)	48.0 in. (1,219 mm)	47.7 in. (1,212 mm)	47.7 in. (1,212 mm)
Hydraulic Blade Side-Shift	N/A	± 13 in. (330 mm)	± 13 in. (330 mm)
Manual Blade Side-Shift	± 12 in. (305 mm)	N/A	N/A
Cutting Edge (Reversible)	0.5 in. x 6.0 in.	0.6 in. x 6.0 in.	0.6 in. x 6.0 in.
Bolster Oscillation	± 25 deg.	± 12 deg.	± 12 deg.
Grade Accuracy with Laser	± 0.25 in. (6 mm)	± 0.25 in. (6 mm)	± 0.25 in. (6 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine



HYDRAULIC BREAKER



Scan the code to watch the breaker in action.

BREAK CONCRETE FASTER

and cut through rocks easier.

Turn your compact loader into a powerfully precise demolition machine with the hydraulic breaker attachment.



OPTIONS AND ACCESSORIES

Breaker Bits: Bobcat offers a selection of breaker tools, equipping you with the right tool for each job.

- 60- to 1,000-ft.-lb. impact energy classes
- Most models can quickly mount to loader or excavator
- Transmit lower noise and vibration levels
- Virtually maintenance-free

CONSTANT POWER AND CONSISTENT PRODUCTIVITY FOR EVERY JOB.

Bobcat® breakers use hydraulic oil flowing through your machine to fire the breaker. Nitrogen assists the piston's return to the firing position. This design delivers peak power with every blow and needs less recharging. Plus it requires virtually no energy-chamber maintenance. Most breakers from other manufacturers fire the piston with compressed nitrogen, which leaks through piston seals during use or through improper storage. Over time, this leads to decreased performance. Bobcat breakers also use hydraulic oil to cool the piston and breaker walls, which prevents wear and extends the life of your attachment.



Bobcat®

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information

HYDRAULIC BREAKER

AUTO POWER

Automatically regulates pressure, ensuring hydraulic breaker operation regardless of changes in outdoor temperature and delivering maximum performance across a large range of carriers. It also limits excessive pressure at the time of start-up, preventing possible downtime.

BREAKER CRADLE

A cylindrical design improves job access in confined areas, providing accurate performance in more environments.

EASY MOUNTING AND CARRIER VERSATILITY

Quickly and easily mount and remove, or switch the hydraulic breaker attachment from a loader to excavator, with the Bob-Tach® and X-Change™ attachment mounting systems.

EASY, MINIMAL MAINTENANCE

The internal power cell has fewer moving parts, including only 12 main service parts.

QUIETER OPERATION

Upper and lower shock absorbers isolate the breaker from the housing, reducing noise and vibration to deliver operator comfort without sacrificing performance.

STEEL RING SYSTEM

An innovative Bobcat feature, the steel ring system retains the tool bushing, protects the grease access and provides for quick tool changes.

HOSE GUARD


Protects hoses and fittings when working in tight spaces.

INCLUDED GO/NO-GO GAUGE

Allows operator to quickly verify three critical wear areas; check the gauge to see whether components meet spec or not, with no measuring required.

SINGLE LOWER BUSHING

Most models have just one lower bushing that is easily replaceable on the job.

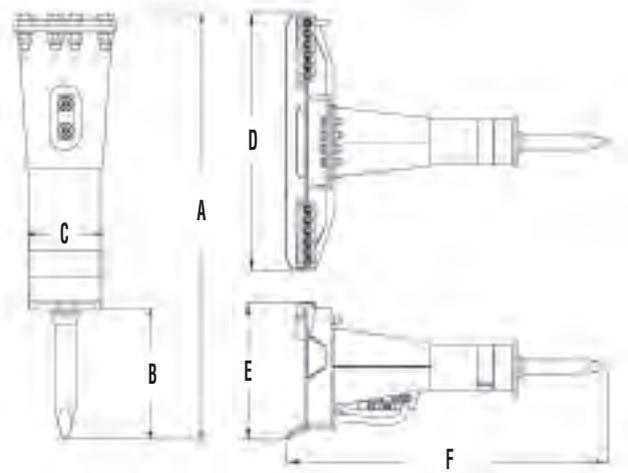

Model	HB680	HB880	HB980	HB1180	HB1380	HB2380
Performance						
Impact Energy Class	150 ft.-lb. (200J)	300 ft.-lb. (407J)	500 ft.-lb. (650J)	750 ft.-lb. (1,016J)	850 ft.-lb. (1,152J)	1,000 ft.-lb. (1,356J)
CIMA Tool Energy Rating	143 ft.-lb. (194J)	207 ft.-lb. (282J)	282 ft.-lb. (382J)	384 ft.-lb. (502J)	515 ft.-lb. (700J)	700 ft.-lb. (950J)
Blows Per Minute	1,340 @ 13 gpm	1,310 @ 17 gpm	1,450 @ 21 gpm	1,280 @ 26 gpm	1,230 @ 32 gpm	910 @ 33 gpm
Flow Requirements	7.0-13.0 gpm (26-49 L/min.)	8.0-17.0 gpm (30-64 L/min.)	12.0-23.0 gpm (45-87 L/min.)	15.0-26.0 gpm (57-98 L/min.)	17.0-32.0 gpm (65-120 L/min.)	19.8-33.0 gpm (75-125 L/min.)
Estimated Breaker Performance with Concrete						
Recommended Working Thickness	2.0-4.0 in. (50-100 mm)	4.0-10.0 in. (100-250 mm)	6.0-14.0 in. (150-350 mm)	8.0-16.0 in. (150-350 mm)	10.0-18.0 in. (250-455 mm)	12.0-20.0 in. (305-500 mm)
Demolished Volume Per Hour						
Non-Reinforced	1-4 yd. ³ /hr. (0.8-3.1 m ³ /hr.)	4-12 yd. ³ /hr. (3.1-9.2 m ³ /hr.)	5-15 yd. ³ /hr. (3.8-11.5 m ³ /hr.)	6-15 yd. ³ /hr. (4.6-11.5 m ³ /hr.)	8-17 yd. ³ /hr. (6.1-13 m ³ /hr.)	10-20 yd. ³ /hr. (7.6-15.3 m ³ /hr.)
Reinforced	1-3 yd. ³ /hr. (0.8-2.3 m ³ /hr.)	1-4 yd. ³ /hr. (0.8-3.1 m ³ /hr.)	2-6 yd. ³ /hr. (1.5-4.6 m ³ /hr.)	2-7 yd. ³ /hr. (1.5-5.4 m ³ /hr.)	3-8 yd. ³ /hr. (2.3-6.1 m ³ /hr.)	4-9 yd. ³ /hr. (3.1-6.9 m ³ /hr.)
Weights						
Breaker with Nail Point and Excavator Fixing Cap	426 lb. (152 kg)	580 lb. (263 kg)	720 lb. (327 kg)	819 lb. (372 kg)	1,011 lb. (459 kg)	1,065 lb. (483 kg)
Breaker with Nail Point and Loader Mounting Frame	494 lb. (224 kg)	736 lb. (334 kg)	876 lb. (397 kg)	1,050 lb. (476 kg)	1,161 lb. (527 kg)	1,215 lb. (551 kg)
Breaker with Nail Point, Excavator Fixing Cap and Loader X-Change Frame	632 lb. (287 kg)	786 lb. (334 kg)	1,082 lb. (490 kg)	1,130 lb. (513 kg)	973 lb. (441 kg)	1,027 lb. (466 kg)
Dimensions						
Length (A) (excavator fixing cap)	49.7 in. (1,262 mm)	57.5 in. (1,461 mm)	60.7 in. (1,542 mm)	64.9 in. (1,647 mm)	67.5 in. (1,713 mm)	71.3 in. (1,811 mm)
Tool Length (B)	13.0 in. (330 mm)	13.0 in. (330 mm)	14.0 in. (356 mm)	16.0 in. (406 mm)	17.0 in. (432 mm)	18.0 in. (457 mm)
Breaker Lower (C) Cradle Diameter	7.3 in. (186 mm)	8.4 in. (214 mm)	8.8 in. (223 mm)	9.5 in. (241 mm)	9.6 in. (244 mm)	9.7 in. (246 mm)
Width (D) (loader mounting frame)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)	45.4 in. (1,152 mm)
Height (E) (loader mounting frame)	20.5 in. (520 mm)	20.5 in. (520 mm)	20.5 in. (520 mm)	20.5 in. (520 mm)	20.5 in. (520 mm)	20.5 in. (520 mm)
Length (F) (loader mounting frame)	44.7 in. (1,136 mm)	52.9 in. (1,344 mm)	55.9 in. (1,421 mm)	60.3 in. (1,530 mm)	64.9 in. (1,647 mm)	68.7 in. (1,745 mm)
Tool Diameter	2.2 in. (55.1 mm)	2.6 in. (65 mm)	2.8 in. (72.1 mm)	3.0 in. (77 mm)	3.4 in. (85 mm)	3.8 in. (95 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Excavator, Mini Track Loader



INDUSTRIAL GRAPPLE

Grab & Hold



bulky material and

The industrial grapple delivers easy handling of hard-to-manage materials in the industrial or construction setting. The two-arm design of the larger industrial grapples grabs hold of material in two places. As a result, you get maximum contact with material and strong biting force across irregular-shaped loads. With easy-to-use hydraulic controls, any operator can securely handle bulky or uneven loads. Built for day-in, day-out duty, the industrial grapple sinks in to the toughest jobs all day, every day.

Choose from a bucket or fork bottom for maximum load capability. Smaller grapples have a single grapple arm.

DUAL CYLINDERS (Large Grapples Only)

Dual cylinders provide the ability to secure uneven loads.

REMOVABLE HOSE GUIDE

Provides easy hose routing when the grapple is attached. Reduce exposure to snags and other hazards.

REPLACEABLE CUTTING EDGE ON BUCKET GRAPPLES

Standard equipment for bucket protection.

REINFORCED TINES

Bobcat® tines are tougher, backed by more steel and greater reinforcement.

OPEN GRAPPLE DESIGN

Offers superior visibility to the work area.

GREASEABLE PIVOT POINTS

Provide long life for pins and bushings.

**EXCLUSIVE****INERTIA-WELDED CYLINDER ENDS**

A Bobcat-exclusive design, the inertia-welded cylinder ends deliver strong, smooth operation by improving hydraulic cushioning at the end of the stroke.

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



INDUSTRIAL GRAPPLE




Bobcat
ADVANTAGE

FORCE CHALLENGE

Scan the code to see our force challenge video and find out which industrial grapple has the highest clamping force to handle stubborn materials.



odd-shaped objects.

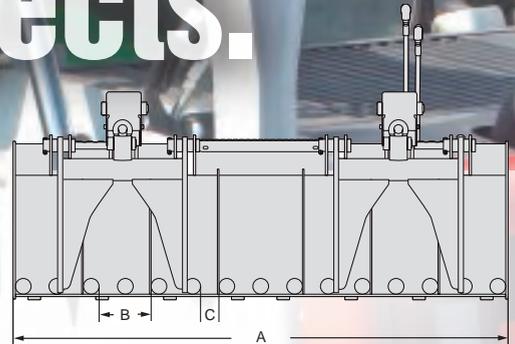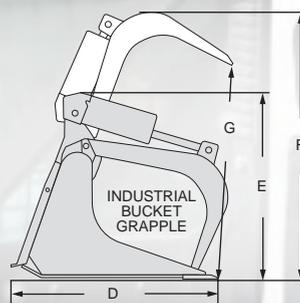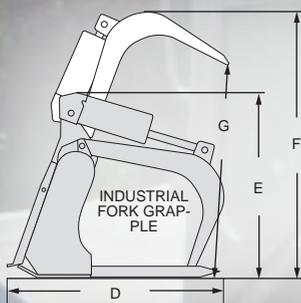

Specifications	36 in. Bucket	48 in. Bucket	62 in. Bucket	68 in. Bucket	74 in. Bucket	80 in. Bucket
Operating Weight	365 lb. (166 kg)	448 lb. (203 kg)	884 lb. (401 kg)	922 lb. (418 kg)	960 lb. (435 kg)	1,101 lb. (500 kg)
Width (A)	36.0 in. (914 mm)	48.0 in. (1,219 mm)	62.0 in. (1,575 mm)	68.0 in. (1,727 mm)	74.0 in. (1,905 mm)	80.0 in. (2,032 mm)
Length (D)	32.2 in. (818 mm)	32.2 in. (818 mm)	41.1 in. (1,043 mm)	41.1 in. (1,043 mm)	41.1 in. (1,043 mm)	43.4 in. (1,102 mm)
Height (E) (grapple closed)	29.5 in. (748 mm)	29.5 in. (748 mm)	30.2 in. (766 mm)	30.2 in. (766 mm)	30.2 in. (766 mm)	33.2 in. (843 mm)
Height (F) (grapple open)	41.3 in. (1,050 mm)	41.3 in. (1,050 mm)	42.5 in. (1,078 mm)	42.5 in. (1,078 mm)	42.5 in. (1,078 mm)	46.4 in. (1,179 mm)
Max. Tooth Opening (G)	30.3 in. (767 mm)	30.3 in. (767 mm)	32.6 in. (828 mm)	32.6 in. (828 mm)	32.6 in. (828 mm)	36.2 in. (919 mm)

Specifications	66 in. Fork	78 in. Fork
Operating Weight	937 lb. (425 kg)	1,218 lb. (552 kg)
Width (A)	66.9 in. (1,699 mm)	78.8 in. (2,002 mm)
Tine Spacing		
Standard (B)	9.0 in. (228 mm)	9.0 in. (228 mm)
Complete (C)	3.6 in. (91 mm)	3.6 in. (91 mm)
No. of Fork Teeth		
Standard	7	8
Complete	13	15
Length (D)	41.1 in. (1,043 mm)	43.4 in. (1,102 mm)
Height (E) (grapple closed)	30.2 in. (766 mm)	32.9 in. (836 mm)
Height (F) (grapple open)	42.5 in. (1,078 mm)	45.9 in. (1,166 mm)
Max. Tooth Opening (G)	31.8 in. (808 mm)	33.9 in. (861 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



LANDSCAPE RAKE

Rake and collect surface debris while smoothing and leveling the soil. It picks up 0.75-inch rocks and larger and also picks up most 0.50-inch rocks. When full, dump the debris collected by the landscape rake for a completely clean finish.

GIVE YOUR JOBSITE a perfect

Specifications

	Model 5B	Model 6B
Length	63.3 in. (1,608 mm)	63.3 in. (1,608 mm)
Height	40.4 in. (1,026 mm)	40.4 in. (1,026 mm)
Working Width	60.0 in. (1,524 mm)	72.0 in. (1,829 mm)
Overall Width	66.6 in. (1,693 mm)	78.6 in. (1,998 mm)
Weight	1,109 lb. (503 kg)	1,237 lb. (561 kg)
Number of Tooth Bars	12	12
Number of Teeth (total)	384	456
Capacity	12.1 ft. ³ (0.34 m ³)	14.3 ft. ³ (0.40 m ³)



Rakes and collects



Dumps debris



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



LANDSCAPE RAKE

- Collects surface debris for cleanup
- Prepares seedbeds
- Readies lawns for spreading topsoil
- Levels soil before turf placement

HARD TEETH

For maximum uptime protection, the teeth are hardened to withstand more wear and tear when working in the soil, increasing the life of the attachment.

INDIVIDUALLY REPLACEABLE RAKE BARS

Deliver better ground contact and better leveling. Easy to replace for long attachment life.

SIDE SKIS

Provide adjustable depth control, leaving only a slight, knife-edge mark in the finished surface.

TOP COVER

When materials have been collected, the top cover opens for easy dumping, allowing you to leave a cleaner finish behind.



Scan the code to see the landscape rake in action.

LANDPLANE



Remove large clods and rocks while leveling and grading the ground.

Working in either forward or reverse, the landplane makes it easy to break up hard ground and level a surface. Use the landplane to peel sod or aerate soil for seeding. No more back-breaking hand-raking. Models include a removable metal grate to help break up clumps and a bi-directional scarifier to help loosen stubborn soils.

Specifications	48 in.	72 in.	78 in.
Weight	390 lb. (177 kg)	680 lb. (308 kg)	700 lb. (318 kg)
Width	48.0 in. (1,220 mm)	73.0 in. (1,982 mm)	79.0 in. (2,007 mm)
Length	46.6 in. (1,184 mm)	51.5 in. (1,309 mm)	51.5 in. (1,309 mm)
Height	20.6 in. (523 mm)	20.9 in. (531 mm)	20.9 in. (531 mm)
Cutting Edge	0.5x4.0 in. (13x102 mm)	0.5x6.0 in. (13x152 mm)	0.5x6.0 in. (13x152 mm)
Working Depth Scarifier	3.0 in. (76 mm)	3.5 in. (89 mm)	3.5 in. (89 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine

finish.




Scrapes



MOWER

The mower is the ideal maintenance attachment for landscape contractors, nurseries, hobby farms, municipalities and large-lot rural homeowners. This front-mounted unit delivers excellent visibility to all corners of the deck, so you can cut efficiently around obstacles. Powered by a direct-drive hydraulic motor, three overlapping blades cut cleanly, without skips, discharging clippings to the rear. The unique frame design allows the mower to oscillate independently from the loader. It follows uneven terrain, delivering a close, clean cut.

- Delivers clean, even cut on rights-of-way and large acreages
- Front-mounted mower eliminates flattened grass before the cut
- Oscillation allows the deck to float, preventing scalping and following uneven terrain
- Three overlapping blades
- Cutting widths of 71.5 and 89.5 inches
- Adjustable cutting heights from 2.0 to 5.5 inches in half-inch increments

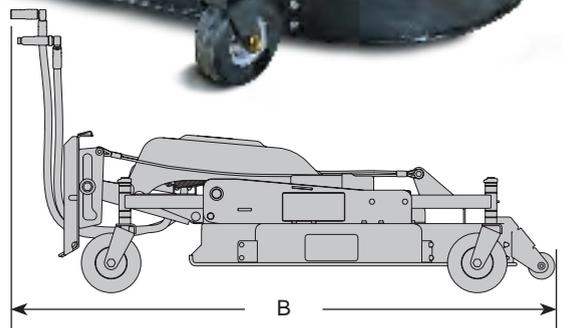**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



MOWER

Mow the
roughest
terrain
into a
clean-cut
landscape.

STANDARD REAR DISCHARGE

Allows you to get close to structures and obstacles on both sides of the deck. It also disperses grass clippings evenly throughout the job, under the carrier and away from buildings, trees and fences. (Mulching and side-discharge kits are available.)

ANTI-SCALPING WHEEL

Protects the mower blades from damage caused by striking the ground when mowing over uneven terrain. Also prevents the mower deck from scraping the ground, resulting in longer blade life and consistent cutting height.

CASTER WHEELS

Combined with the attachment frame, the caster wheels allow the mower to oscillate independently of the loader, providing a floating deck that better follows uneven terrain. Adjust for different cutting heights from 2.0 to 5.5 inches.

CUTTING BLADES

Designed for mowing efficiency, the mower attachment features three overlapping cutting blades that eliminate skips for even cutting action.

DECK BRACING

Located on the top of the mower, allowing for a smooth deck interior, delivering improved air and material flow.

BELT DRIVE

The hydraulic motor powers a single V-belt, eliminating shear pins and related downtime.

BLADE SHUTOFF


Incorporated into the attachment frame. Blade rotation automatically stops when the mower is lifted too high.

BLADE MOUNTING

Dual mounting bolts make blade replacement easy.

OPTIONS AND ACCESSORIES

Mulching and side-discharge kits are available to easily convert your mower to fit the application and the carrier.

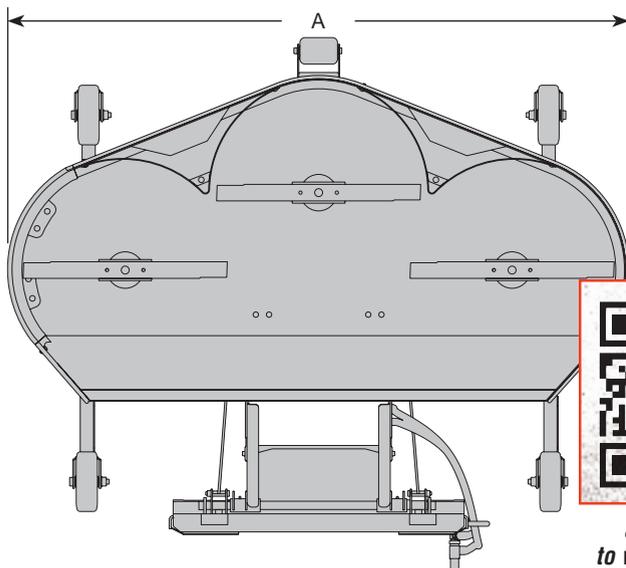

Scan the code
to watch the mower
in action.

Specifications	72 in.	90 in.
Cutting Width	71.5 in. (1,816 mm)	89.5 in. (2,273 mm)
Overall Width (A)	76.0 in. (1,930 mm)	94.0 in. (2,388 mm)
Overall Length (B)	68.0 in. (1,727 mm)	75.0 in. (1,905 mm)
Height	18.5 in. (470 mm)	18.5 in. (470 mm)
Operating Weight	880 lb. (399 kg)	990 lb. (449 kg)
Flow Range	15-22 gpm (57-83 L/min.)	15-22 gpm (57-83 L/min.)
Number of Blades	3	3
Shutoff Travel Height	8.5 in. (216 mm)	8.5 in. (216 mm)
Cutting Height Range (Adjustable in 0.5" increments)	2.0-5.5 in.	2.0-5.5 in.
Blade Tip Speed	12,752 ft./min. @ 17 gpm	11,730 ft./min. @ 17 gpm
	15,002 ft./min. @ 20 gpm	14,702 ft./min. @ 20 gpm
	16,502 ft./min. @ 22 gpm	16,172 ft./min. @ 22 gpm

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine



PALLET AND HYDRAULIC FORK



STICK A FORK IN IT. HEAVY PALLETS HAVE MET THEIR MATCH.

Move bulky, bagged or palletized material quickly and easily with the pallet fork attachment. Adjustable forks load and unload, lift and carry, move and place materials around a variety of jobsites. With the hydraulic pallet fork, position the forks from the operator seat for maximum operator comfort and efficiency.

Put it to work lifting, carrying and moving to save time and labor costs on applications such as industrial plant and landscaping work, construction sites, farm chores, fertilizer handling and municipal projects. Place materials, such as block or lumber, right where they're installed and avoid double handling.

ISO 2330:2002 STANDARDS

Bobcat® pallet forks meet ISO 2330:2002 standards for yield and fatigue tests. In addition, the frame is thoroughly tested for strength and longevity.

VISIBILITY

Good visibility at ground and truck bed heights.

STANDARD AND HEAVY-DUTY TEETH

From 36 to 48 inches.

ENTRY/EXIT STEP

Provides easy, safe entry to and exit from the machine.

One model with hydraulically

adjustable forks: While on the job, conveniently adjust positioning of the forks from the operator seat.



Bobcat®


Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.


For more information


PALLET AND HYDRAULIC FORK


Specifications	Frame Width	Frame Height	Frame Weight	Tooth Lengths	Tooth Weight (set of 2)	Total Weight
Small*	37.0 in. (939.8 mm)	34.5 in. (876.3 mm)	105 lb. (47.63 kg)	30.0 in. (762 mm)	130 lb. (58.97 kg)	235 lb. (106.60 kg)
				36.0 in. (914.4 mm)	147 lb. (66.68 kg)	252 lb. (114.31 kg)
Standard	46.0 in. (1,168.4 mm)	39.0 in. (990.6 mm)	200 lb. (90.72 kg)	42.0 in. (1,066.8 mm)	164 lb. (74.39 kg)	364 lb. (165.11 kg)
				48.0 in. (1,219.2 mm)	181 lb. (82.10 kg)	381 lb. (172.82 kg)
Heavy Duty	60.0 in. (1,524.0 mm)	49.0 in. (1,244.6 mm)	295 lb. (133.81 kg)	48.0 in. (1,219.2 mm)	238 lb. (107.96 kg)	533 lb. (241.77 kg)
				42.0 in. (1,066.8 mm)	164 lb. (74.39 kg)	547 lb. (248.12 kg)
Hydraulic	48.0 in. (1,219.2 mm)	39.0 in. (990.6 mm)	383 lb. (173.73 kg)	48.0 in. (1,219.2 mm)	181 lb. (82.10 kg)	564 lb. (255.83 kg)
				42.0 in. (1,066.8 mm)	164 lb. (74.39 kg)	547 lb. (248.12 kg)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine* Mini Track Loader (small pallet forks only)

Small	Loader Rated Operating Capacity	Pallet Fork Load Rating at 15.75 in.
	500 lb. (230 kg)	260 lb. (120 kg)
	600 lb. (270 kg)	350 lb. (160 kg)
	700 lb. (320 kg)	440 lb. (200 kg)

Standard	Loader Rated Operating Capacity	Pallet Fork Load Rating at 24 in.
	950 lb. (430 kg)	410 lb. (190 kg)
	1,200 lb. (540 kg)	660 lb. (300 kg)
	1,300 lb. (590 kg)	770 lb. (350 kg)
	1,500 lb. (680 kg)	950 lb. (430 kg)
	1,700 lb. (770 kg)	1,120 lb. (510 kg)
	1,900 lb. (860 kg)	1,270 lb. (580 kg)
	2,100 lb. (950 kg)	1,380 lb. (630 kg)
	2,300 lb. (1,040 kg)	1,500 lb. (680 kg)
	2,500 lb. (1,130 kg)	1,560 lb. (710 kg)

Heavy-Duty	Loader Rated Operating Capacity	Pallet Fork Load Rating at 24 in.
	2,000 lb. (910 kg)	1,300 lb. (590 kg)
	2,200 lb. (1,000 kg)	1,430 lb. (650 kg)
	2,400 lb. (1,090 kg)	1,560 lb. (710 kg)
	2,600 lb. (1,180 kg)	1,690 lb. (770 kg)
	2,800 lb. (1,270 kg)	1,820 lb. (830 kg)
	3,000 lb. (1,360 kg)	1,950 lb. (880 kg)
	3,200 lb. (1,450 kg)	2,080 lb. (940 kg)
	3,400 lb. (1,540 kg)	2,210 lb. (1,000 kg)
	3,600 lb. (1,630 kg)	2,340 lb. (1,060 kg)

Hydraulic	Loader Rated Operating Capacity	Pallet Fork Load Rating at 24 in.
	900 lb. (408 kg)	360 lb. (160 kg)
	1,300 lb. (590 kg)	550 lb. (250 kg)
	1,500 lb. (680 kg)	655 lb. (295 kg)
	1,700 lb. (770 kg)	845 lb. (380 kg)
	1,900 lb. (860 kg)	990 lb. (450 kg)
	2,100 lb. (950 kg)	1,050 lb. (475 kg)
	2,300 lb. (1,040 kg)	1,150 lb. (520 kg)
	2,500 lb. (1,130 kg)	1,250 lb. (565 kg)
	2,700 lb. (1,225 kg)	1,350 lb. (610 kg)
3,000 lb. (1,360 kg)	1,680 lb. (760 kg)	



STRENGTH CHALLENGE

In this test, we put pallet forks through a two-part test to evaluate their frame and tine strength. See why Bobcat pallet forks offer strength and endurance that exceed the industry benchmarks.





PLANER

Less expensive to maintain and more maneuverable than dedicated planers, the Bobcat® planer cuts and mills concrete and asphalt. Utilizing carbide-tipped bits mounted on a revolving drum, the planer delivers low-angle, high-velocity blows to uniformly chip pavement in a controlled pattern. Depth, width and slope control are easily set and maintained by the operator. Milled material can be immediately recycled.

Standard-flow planer provides excellent performance on standard-flow machines allowing a lower initial investment for those that only need to use a planer periodically. High-flow planers utilize increased hydraulic horsepower available for higher production. Use with the Selectable Joystick Controls (SJC) speed management to find the “sweet spot” and stay there, maintaining full driveline torque and hydraulic power to maximize performance while reducing fatigue.



- Side cutting teeth
- Free floating oscillation
- Oscillation up to ± 15 degrees

14- to 24-inch models include:

- Removable right ski and endplate allow for flush-wall planing or quickly changing drums
- Hydraulic side shift
- Large rear opening
- Top access panel
- Rear-mounted steel wheels
- Independently adjustable skis
- One-piece concentric planer drum



Additional feature on the 18- and 24-inch models:

PRIORITY VALVE
Diverts oil to the depth function without loss of power to drum, enabling adjustments on the go without sacrificing cutting performance.



- Clean up around larger miller machines
- Mate uneven pavement surfaces
- Cut drainage in parking lots
- Taper edges on roadways
- Mill around manholes



Additional features of the 40-inch high flow model:

- FRONT ACCESS PANEL**
Saves time during inspection and cutting bit replacement.
- HYDRAULIC SIDE SHIFT**
Enables flush planing next to curbs and walls.

DIVERTER VALVE

Switch between hydraulic side-shift and hydraulic oscillation functions.

TWO DIRECT-DRIVE MOTORS

Increases torque, force, productivity – adding life to the planer.



Training Resources

Train operators and technicians in the safe operation and servicing of Bobcat equipment. Operator training courses, safety videos and other training materials are available at your Bobcat dealer's parts department or online at Bobcat.com/safety

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



PLANER

CUT & MILL CONCRETE & ASPHALT.

Scan the code
to see the planer
in action.



PLANER OPTIONS:

- **Fast-Cut Drum:** Has wide spacing between bits to provide ultimate performance. Resulting surface is usually overlaid with new material. Multiple options for 14- to 24-inch widths.
- **Smooth-Cut Drum:** Nearly twice as many bits as the fast-cut drum for a relatively smooth surface. Ideal for exposed surfaces.
- **Surface Drum:** Leaves a smooth finish. Often used for removing paint lines from roadways, the surface drum leaves a shallow trench that may be filled in with new paint, thermoplastics or reflective tape.
- **Slot-Cut Drum:** Cuts a trench through concrete or asphalt for laying utilities or removal of a section. Available in 2.5- and 4-inch widths only.
- **Water Kit:** Provides dust suppression and bit lubrication to maximize bit life.
- **Guide Rod Kit:** Makes it easier for operators to follow a line.
- **Operating Training Kit:** Available for order.
- **Weight Kit (18- and 24-inch planer attachments):** Improves performance by providing increased downward pressure on the drum.
- **Hydraulic Oscillation Kit (18- and 24-inch planer attachments):** Provides fingertip-control of drum oscillation.

HYDRAULIC PRIORITY VALVE AND MOTOR



TOP SERVICE PANEL



Hydraulic
Oscillation Kit

Specifications	14 in. Standard Flow	18 in. High Flow	24 in. High Flow	40 in. High Flow
Weight	1,107 lb. (502 kg) (w/ drum)	1,191 lb. (540 kg) (w/o drum)	1,254 lb. (569 kg) (w/o drum)	2,300 lb. (1,043 kg) (w/ drum)
Overall Length	49.0 in. (1,245 mm)	49.0 in. (1,245 mm)	49.0 in. (1,245 mm)	44.0 in. (1,118 mm)
Standard Drum Cutting Width	14.0 in. (356 mm)	18.0 in. (457 mm)	24.0 in. (610 mm)	40.0 in. (1,016 mm)
Cutting Depth	0-6.0 in. (152 mm)	0-6.0 in. (152 mm)	0-6.0 in. (152 mm)	0-5.0 in. (127 mm)
Max. Cutting Angle	± 15 deg.	± 15 deg.	± 15 deg.	± 8 deg. (Hydraulic)
Side-Shift (Hydraulic)	29.8 in. (757 mm)	29.8 in. (757 mm)	29.8 in. (757 mm)	25.6 in. (650 mm)
Planing Distance (next to curb, if loader width is less than.)	Flush 75.4 in. (1,915 mm)	Flush 75.4 in. (1,915 mm)	Flush 80.4 in. (2,042 mm)	2.6 in. (65 mm)
Approved Drums	2.5-14.0 in.	2.5-18.0 in.	2.5-24.0 in.	40.0 in.

Approved Machines: Skid-Steer Loader, Compact Track Loader,
All-Wheel Steer Loader



ROOT GRAPPLE

PUT THE BITE ON

rocks, roots, brush, over-growth and debris.



The root grapple rips into tough jobs with ease. A heavy-duty design improves the wear life of the grapple, especially when operating in tough land clearing jobs. It's also ideal for landscaping, demolition, construction, rental or buildings and grounds maintenance. Tear it up, bite it off and spit it out with the root grapple.

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.



For more information



ROOT GRAPPLE



Scan the code to watch the root grapple in action.

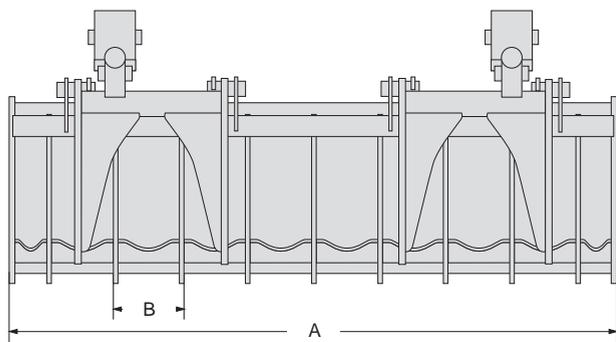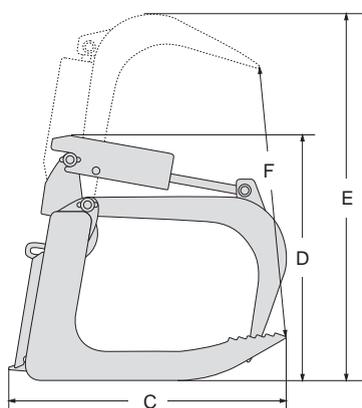

CURVED SKELETAL TOOTH DESIGN

Picks up material without driving teeth into the ground; allows dirt to fall on site.

FULLY ENCLOSED MOUNTING FRAME

Extends wear life by minimizing flexing in the frame area.

EXCLUSIVE INERTIA-WELDED CYLINDER ENDS

Exclusive inertia-welded cylinder ends from Bobcat deliver strong, smooth operation by improving hydraulic cushioning at the end of the stroke.

DUAL CYLINDERS (Large Grapples Only)

Two cylinders provide the ability to clamp separately, securing uneven loads. Bobcat® grapples provide the highest clamping forces in the industry.

Specifications	36 in.	48 in.	66 in.	72 in.	82 in.
Operating Weight	297 lb. (135 kg)	371 lb. (168 kg)	961 lb. (436 kg)	1,025 lb. (465 kg)	1,130 lb. (512 kg)
Width (A)	36.0 in. (914 mm)	48.0 in. (1,219 mm)	66.0 in. (1,676 mm)	72.5 in. (1,842 mm)	82.5 in. (2,096 mm)
Tine Spacing (B)	8.5 in. (216 mm)	8.5 in. (216 mm)	8.9 in. (225 mm)	8.9 in. (225 mm)	8.9 in. (225 mm)
Length (C)	30.7 in. (779 mm)	30.7 in. (779 mm)	42.8 in. (1,088 mm)	42.8 in. (1,088 mm)	42.8 in. (1,088 mm)
Height (D) (grapple closed)	29.8 in. (757 mm)	29.8 in. (757 mm)	34.4 in. (873 mm)	34.4 in. (873 mm)	34.4 in. (873 mm)
Height (E) (grapple open)	41.7 in. (1,058 mm)	41.7 in. (1,058 mm)	52.3 in. (1,327 mm)	52.3 in. (1,327 mm)	52.3 in. (1,327 mm)
Teeth	5	7	8	9	11
Max. Tooth Opening (F)	28.3 in. (719 mm)	28.3 in. (719 mm)	36.8 in. (935 mm)	36.8 in. (935 mm)	36.8 in. (935 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, VersaHANDLER® TTC



SCARIFIER

SCRAPER



Tear up the asphalt and break up hard-packed soil.

The front-mounted scarifier operates when traveling in reverse. A manual lock holds teeth in position for steady results. Adjustable depth skis allow you to set the digging depth.



Specifications

Shipping Weight	350 lb. (159 kg)
Width	60.0 in. (1,524 mm)
Number of Teeth	5 (7 w/o depth guides)
Max. Dig Depth (approximate)	6.0 in. (152 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader

Scrape away packed-on or built-up materials.

The scraper slides along the ground, easily breaking up packed material to leave a smooth surface behind. Remove tough materials such as mud, snow and ice. It's also a handy aid for carpet and floor tile removal. With its self-sharpening cutting edge, the scraper cuts underneath material, easily peeling it away for removal.



Specifications

Operating Weight	172 lb. (78 kg)
Height	19.0 in. (483 mm)
Width	45.0 in. (1,143 mm)
Length	55.0 in. (1,397 mm)
Disk Diameter	22.0 in. (559 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC

SEEDER

SILT FENCE INSTALLER

Place seed at the perfect depth, with the perfect spacing.

Unlike broadcast seeders, the seeder attachment is a ground-driven unit that seeds directly into the soil. This allows for better germination and more precise coverage. A front roller firms the ground and presses small rocks beneath the surface while pressing the seed into the seed-bed. A second roller gently forms soil around the seed for optimum seed-to-soil contact. Gets the job done at a rate of more than two acres per hour.

3-point mounting kit also available.

Specifications

Weight (empty)	1,300 lb. (590 kg)
Weight (full)	1,425 lb. (646 kg)
Height	44.0 in. (1,118 mm)
Overall Width	88.0 in. (2,235 mm)
Working Width	72.0 in. (1,829 mm)
Length	43.0 in. (1,092 mm)
Hopper Capacity	4 bushels



Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat Utility Work Machine, VersaHANDLER TTC

Meet erosion control regulations and avoid costly fines in less time.

The silt fence installer places and secures silt fence at an astonishing rate – thousands of feet per hour. It's the fastest, easiest and most economical way to meet compliance and avoid fines or shutdowns.



3-point mounting kit also available.

Specifications

Operating Weight	775 lb. (352 kg)
Length	72.8 in. (1,849 mm)
Width	45.5 in. (1,156 mm)
Height	70.0 in. (1,778 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



SNOW ACCESSORIES

Only Bobcat offers so many options, ATTACHMENTS, and ways to work in winter.



We also have a wide array of options that let you take control of every job – and tailor your machine to meet your needs.

FOR PERFORMANCE

Save time and labor on every job:

- High-flow hydraulics
- 2-speed
- Power Bob-Tach™ mounting system
- Block heater, engine oil heater and cold start kit
- Tire chains to gain traction and control



FOR COMFORT

Stay comfortable – and focused on doing a great job for your customers:



- Enclosed cab, heat and air conditioning
- Suspension seat
- AM/FM stereo
- Selectable Joystick Controls (SJC) (ISO and “H” patterns)
- Advanced Control System (ACS) (hand and foot controls)
- Deluxe Instrument Panel (theft protection and keyless-start convenience)



FOR COMPLIANCE

Comply with the requirements for your jobsite:

- Operator training kits
- Special applications kits
- Lighting kits

To learn more about customizing your equipment, visit Bobcat.com/loaders/customize



SNOWBLOWER



Deep drifts are no match for the Bobcat® snowblower. Blow snow off driveways and parking lots or tight spaces like sidewalks. The rotating chute and deflector bank snow high or throw it far. Adjust the deflector up or down and point snow in almost any direction – wherever you want the snow to be placed. It's perfect for tossing the snow in places you can't reach with your machine: in the middle of a lawn or in a wooded area beside a path.

THROW AND BLOW THE SNOW

CHAIN-AND-SPROCKET SYSTEM

Rather than cables, a chain-and-sprocket system rotates the chute, eliminating loose, tangled and frozen cables and providing maximum uptime protection.

DIRECT-DRIVE HYDRAULIC MOTOR

Delivers necessary operating power while reducing overall maintenance costs, extending the life of the attachment and eliminating the need for high-wear items such as gear boxes, chains, sprockets and shear pins.

ROTATING CHUTE AND DEFLECTOR

Chute rotates up to 276 degrees and deflector adjusts up or down as needed. Point and place the snow wherever you want.

REPLACEABLE CUTTING EDGE

Protects your uptime and reduces operating costs.

SKID SHOES

Adjustable, set them to scrape the pavement clean or move them higher to remove snow from gravel lots and driveways.

OPTIONS AND ACCESSORIES

- **Truck Loading Chute** Available for high-flow models, the truck loading chute allows the snowblower to place snow high in the truck for easier removal and hauling.
- **High-Flow Models** Utilize the extra hydraulic horsepower in your high-flow Bobcat loader to power through the heavy snowfalls or the deepest drifts – and throw snow farther.



Scan the code to see the snowblower in action.

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information





SNOWBLOWER



Truck loading chute

and clear
a clean
path.

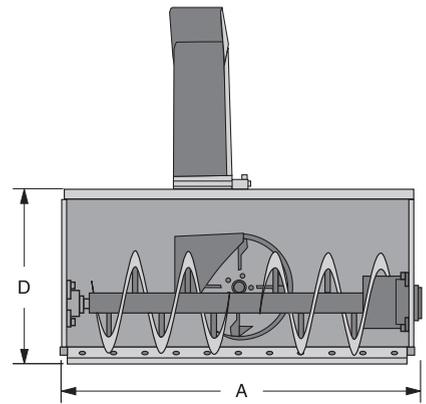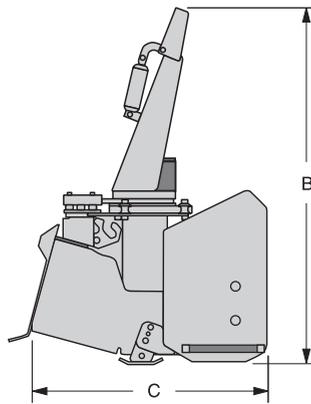

Specifications	SB150 x 36	SB150 x 48	SB200 x 60	SB200 x 66	SB200 x 72	SB200 x 78	SB240 x 72	SB240 x 84	SBX240 x 72	SBX240 x 84
Width (A)	39.4 in. (1,000 mm)	51.4 in. (1,306 mm)	62.5 in. (1,587 mm)	68.5 in. (1,740 mm)	74.5 in. (1,893 mm)	80.5 in. (2,045 mm)	74.5 in. (1,892 mm)	86.5 in. (2,197 mm)	74.5 in. (1,892 mm)	86.5 in. (2,197 mm)
Height (B)	50.4 in. (1,280 mm)	50.4 in. (1,280 mm)	61.0 in. (1,549 mm)	61.0 in. (1,549 mm)	61.0 in. (1,549 mm)	61.0 in. (1,549 mm)	65.5 in. (1,664 mm)	65.5 in. (1,664 mm)	65.5 in. (1,664 mm)	65.5 in. (1,664 mm)
Length (C)	37.0 in. (940 mm)	37.0 in. (940 mm)	38.5 in. (978 mm)	38.5 in. (978 mm)	38.5 in. (978 mm)	38.5 in. (978 mm)	43.3 in. (1,099 mm)	43.3 in. (1,099 mm)	43.3 in. (1,099 mm)	43.3 in. (1,099 mm)
Intake (D)	23.0 in. (584 mm)	23.0 in. (584 mm)	25.0 in. (635 mm)	25.0 in. (635 mm)	25.0 in. (635 mm)	25.0 in. (635 mm)	34.5 in. (876 mm)	34.5 in. (876 mm)	34.5 in. (876 mm)	34.5 in. (876 mm)
Operating Weight	428 lb. (194 kg)	465 lb. (211 kg)	785 lb. (356 kg)	810 lb. (367 kg)	835 lb. (379 kg)	860 lb. (390 kg)	1,010 lb. (458 kg)	1,070 lb. (485 kg)	1,045 lb. (474 kg)	1,105 lb. (501 kg)
Fan Diameter	15.0 in. (381 mm)	15.0 in. (381 mm)	20.0 in. (508 mm)	20.0 in. (508 mm)	20.0 in. (508 mm)	20.0 in. (508 mm)	24.0 in. (610 mm)	24.0 in. (610 mm)	24.0 in. (610 mm)	24.0 in. (610 mm)
Auger Diameter	14.0 in. (356 mm)	14.0 in. (356 mm)	14.0 in. (356 mm)	14.0 in. (356 mm)	14.0 in. (356 mm)	14.0 in. (356 mm)	18.0 in. (457 mm)	18.0 in. (457 mm)	18.5 in. (457 mm)	18.5 in. (457 mm)
Chute Rotation	276 deg.	276 deg.	270 deg.	270 deg.	270 deg.	270 deg.	270 deg.	270 deg.	270 deg.	270 deg.
Deflector Control	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Throw Distance	Up to 25 ft. (8 m)	Up to 25 ft. (8 m)	Up to 40 ft. (12 m)	Up to 45 ft. (14 m)	Up to 45 ft. (14 m)					
Cutting Edge	0.38 x 3.0 in. (9 x 76 mm)	0.38 x 3.0 in. (9 x 76 mm)	0.5 x 3.0 in. (13 x 102 mm)							

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



SNOW BLADE

Move the snow right where you want it.

The Bobcat® snow blade brings unrivaled speed to any light and moderate snow removal job. It angles 30 degrees to either side with the help of fingertip controls inside the cab of your Bobcat loader. There's no need to leave the cab – or even remove your hands from the controls – in order to move piles of snow from sidewalks, driveways, parking lots and more.

HEAVY-DUTY SNOW BLADE

The heavy-duty snow blades offer five degrees of oscillation to either side to help maneuver the cutting edge when moving snow around drainage in parking lots and transitions from sidewalks to streets. It also features a trip edge. Because the snow blade stays upright, plowed snow remains in front of the blade.

STANDARD-DUTY SNOW BLADE

The standard-duty snow blade has a trip moldboard that folds over and prevents damage to the attachment if it strikes obstacles such as manhole covers, curbs or raised concrete, preventing damage to the attachment.

MOLDBOARD


Angles right or left up to 30 degrees. Trip mechanisms prevent damage from obstacles and surface irregularities.

DEPTH SHOES

Long lasting and adjustable to stand up to virtually any combination of snow and surface.

OPTIONS AND ACCESSORIES

- **Cutting Edges** High-carbon steel comes standard with the snow blade; rubber and polyurethane are available for protecting sensitive surfaces.
- **End Wing Kits** Available for select models, end wings make the attachment more versatile, allowing the snow blade to be used as a snow pusher.

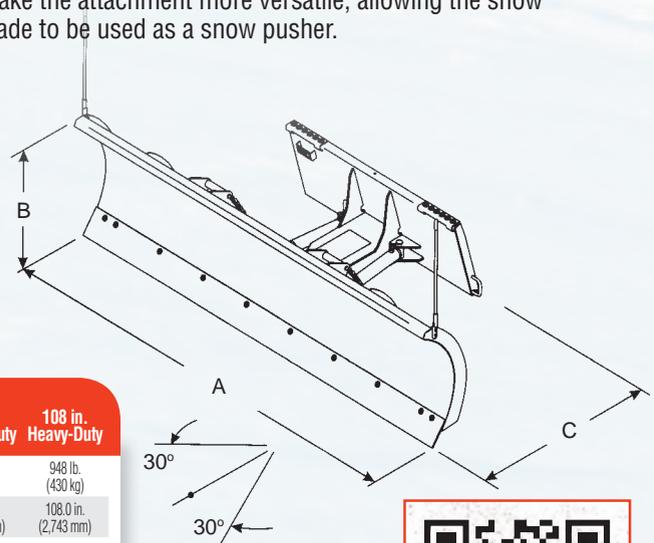

Scan the code
to see the snow
blade in action.

Specifications	54 in.	60 in.	72 in.	84 in.	96 in.	86 in. Heavy-Duty	96 in. Heavy-Duty	108 in. Heavy-Duty
Weight	310 lb. (141 kg)	580 lb. (262 kg)	590 lb. (267 kg)	620 lb. (281 kg)	660 lb. (299 kg)	809 lb. (367 kg)	867 lb. (393 kg)	948 lb. (430 kg)
Width (A)	54.0 in. (1,372 mm)	60.0 in. (1,524 mm)	72.0 in. (1,829 mm)	84.0 in. (2,134 mm)	96.0 in. (2,438 mm)	86.0 in. (2,184 mm)	96.0 in. (2,438 mm)	108.0 in. (2,743 mm)
Height (B)	21.9 in. (555 mm)	28.0 in. (711 mm)	28.0 in. (711 mm)	28.0 in. (711 mm)	28.0 in. (711 mm)	28.5 in. (724 mm)	28.5 in. (724 mm)	28.5 in. (724 mm)
Working Width (C) (fully angled)	46.8 in. (1,189 mm)	52.0 in. (1,321 mm)	63.0 in. (1,600 mm)	73.0 in. (1,854 mm)	83.0 in. (2,108 mm)	75.0 in. (1,905 mm)	83.0 in. (2,108 mm)	94.0 in. (2,390 mm)
Steel Cutting Edge	0.38 x 4.0 in. (9.5 x 102 mm)	0.38 x 6.0 in. (9.5 x 152 mm)	0.50 x 6.0 in. (12.7 x 152 mm)	0.50 x 6.0 in. (12.7 x 152 mm)	0.50 x 6.0 in. (12.7 x 152 mm)			
# Cylinders for angle	1	2	2	2	2	1	1	1
Cylinder Rod Diameter	1.3 in. (32 mm)	1.8 in. (45 mm)	1.8 in. (45 mm)	1.8 in. (45 mm)				
Trip Springs	2	4	4	4	4	4	4	6
Optional Rubber Cutting Edge	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Optional Polyurethane Cutting Edge	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information




SNOW BUCKET

GRAB A BUCKETFUL OF COLD, HARD PRODUCTIVITY.

Snow buckets are straightforward. They're cost-effective. But don't be fooled by their simplicity. These are serious snow-removal tools. In parking lots around cars and driveways, you can get nice and close, or pull the snow away from obstacles for another quick pass. They breeze through paths and driveways. And after the pushing is done, it's just the thing for moving piles of snow out of the way, or loading it into trucks.

- High back and sides maximize pushing productivity through snow
- Waffle skid plates add strength to cutting edge and bucket bottom
- Optional bolt-on side guards increase capacity
- Bolt-on corner cutting edges protect against wear

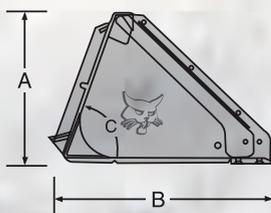

Specifications	68 in.	74 in.	80 in.	88 in.	100 in.
Bucket Cutting/Overall Width	68.0 in. (1,727 mm)	74.0 in. (1,880 mm)	80.0 in. (2,032 mm)	88.0 in. (2,235 mm)	100.0 in. (2,540 mm)
Bucket Height (A)	26.9 in. (683 mm)	26.9 in. (683 mm)	26.9 in. (683 mm)	26.9 in. (683 mm)	26.9 in. (1,201 mm)
Bucket Length (B)	42.0 in. (1,066 mm)	42.0 in. (1,066 mm)	42.0 in. (1,066 mm)	42.0 in. (1,066 mm)	48.5 in. (1,232 mm)
Bucket Weight	578 lb. (262 kg)	609 lb. (276 kg)	640 lb. (290 kg)	681 lb. (308 kg)	878 lb. (398 kg)
Bucket Capacity (ISO Heaped)	24.5 ft. ³ (0.69 m ³)	26.9 ft. ³ (0.76 m ³)	29.2 ft. ³ (0.83 m ³)	32.4 ft. ³ (0.92 m ³)	54.2 ft. ³ (0.69 m ³)
Bucket Capacity (ISO Struck)	18.5 ft. ³ (0.52 m ³)	20.2 ft. ³ (0.57 m ³)	21.9 ft. ³ (0.62 m ³)	24.1 ft. ³ (0.68 m ³)	40.8 ft. ³ (1.16 m ³)

OPTIONS AND ACCESSORIES

- Bolt-On Cutting Edge Provides longer life to your loader's bucket.
- Bucket Spill Guard Bolts onto the top of your bucket to reduce material falling over the back of the bucket.

Check out more Bobcat® attachments that can be used for snow removal:

ANGLE BROOM	16
SCRAPER	56
SNOWBLOWER	58
SPREADER	66



SNOW PUSHER


Collect and push snow to clear big winter jobsites.

The open bottom and wide body of the snow pusher deliver pure pushing power for maximum snow removal speed and efficiency. It brings more collecting and holding capability to the job, which means larger areas can be cleaned without stopping as often. Perfect for parking lots, driveways and building sites. Moldboard flotation and oscillation keep the snow pusher in contact with the ground without damaging equipment or property. This allows safe and efficient snow removal on decorative and sensitive surfaces such as paving stones.

When operating on terrain that isn't perfectly flat, allow the blade to float and follow ground contours and collect more snow. When powering through snow on flat surfaces, keep blade position fixed for clearing hard-packed snow and ice.

OPTIONS AND ACCESSORIES

- **Polyurethane Cutting Edges** Prevent damage to concrete, asphalt or delicate surfaces.

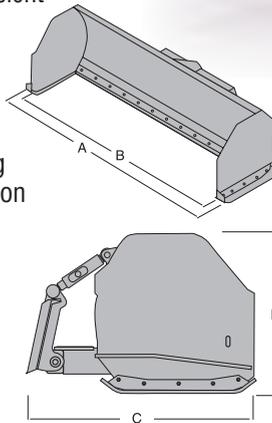

Specifications	94 in.	120 in.
Cutting Width	1,122 lb. (509 kg)	1,256 lb. (570 kg)
Overall Width (A)	102.0 in. (2,591 mm)	128.0 in. (3,251 mm)
Working Width (B)	94.6 in. (2,402 mm)	121.0 in. (3,062 mm)
Length (C)	56.2 in. (1,428 mm)	56.2 in. (1,428 mm)
Height (D)	37.8 in. (961 mm)	37.8 in. (961 mm)
Cutting Edge	1.5 x 8.0 in. Rubber	1.5 x 8.0 in. Rubber
Skid Shoes	0.75 x 5.0 in. AR400	0.75 x 5.0 in. AR400
Float		
Vertical	2.3 in. (58 mm)	2.3 in. (58 mm)
Tilt	12 deg.	12 deg.
Oscillation	± 4.5 deg.	± 4.5 deg.

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat Utility Work Machine, VersaHANDLER TTC


SNOW V-BLADE

Plow through deep drifts and push large piles of snow.

The snow V-blade offers maximum versatility. With five blade configurations, the snow V-blade can be positioned multiple ways without even leaving the cab. Options include:



- **Scoop Blade** collects and holds snow for removal to another area. For final cleanup, pile it high.
- **V-Blade** cuts an initial pathway fast through deep, heavy or hard-packed snow.
- **Angle Blade (right)** moves snow to the right.
- **Angle Blade (left)** quickly and easily moves snow to your left.
- **Straight Blade** gives maximum width for piling snow banks and cleaning light snow cover.

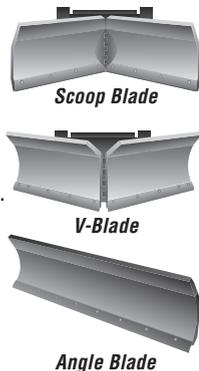

OPTIONS AND ACCESSORIES

- **Flotation Kit** Optional frame flotation kit oscillates blade ± 10 degrees to improve performance on uneven terrain and follow the contour of the ground independently of the carrier.
- **Rubber Cutting Edge** Protects sensitive surfaces.

Specifications	60 in.	72 in.	84 in.	96 in.	108 in.
Height (with blade extension)	28.5 in. (724 mm)	32.8 in. (833 mm)			
Length	40.0 in. (1,016 mm)	47.3 in. (1,201 mm)			
Working Width (V-Blade)	54.0 in. (1,372 mm)	64.5 in. (1,638 mm)	75.0 in. (1,905 mm)	85.5 in. (2,172 mm)	96.0 in. (2,438 mm)
Scoop Working Width (U-Blade)	53.0 in. (1,346 mm)	63.0 in. (1,600 mm)	74.0 in. (1,880 mm)	84.0 in. (2,134 mm)	95.0 in. (2,413 mm)
Working Width (Straight)	62.0 in. (1,575 mm)	74.0 in. (1,880 mm)	86.0 in. (2,184 mm)	98.0 in. (2,489 mm)	110.0 in. (2,794 mm)
Working Width, (angled 30°, left or right)	54.0 in. (1,372 mm)	64.0 in. (1,626 mm)	75.0 in. (1,905 mm)	85.0 in. (2,159 mm)	95.0 in. (2,413 mm)
Operating Weight	660 lb. (299 kg)	738 lb. (335 kg)	779 lb. (353 kg)	824 lb. (374 kg)	868 lb. (394 kg)
Operating Weight (with oscillating kit)	N/A	972 lb. (441 kg)	1,013 lb. (459 kg)	1,058 lb. (479 kg)	1,102 lb. (500 kg)
Oscillation (with flotation kit)	N/A	+/- 10	+/- 10	+/- 10	+/- 10

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



SOD LAYER

Create smooth, green landscapes accurately and efficiently.

Whether laying sod is a normal part of the day-to-day operation or just an occasional chore, the sod layer attachment makes quick and easy work of laying a fresh, green landscape. For high-production sod installation, the sod layer can carry and lay a roll of sod up to 4 feet wide. Its front-mounted maneuverability makes it highly effective on any jobsite, even those with space restrictions.

Specifications

Weight	596 lb. (270 kg)
Sod Roll Widths	24.0-48.0 in. (610-1,219 mm)
Arm Cylinders	(2) 2.00 x 1.00 x 18.50 stroke
Relief Valve Setting	50 psi (adjustable for arm cylinder squeeze)

Approved Machines: Skid-Steer Loader, Compact Track Loader



**THEY SAY YOU CAN'T
BOTTLE CONFIDENCE.
WE SAY THEY'RE WRONG.**

Whether it's in a bottle, tube or a box, we package confidence for those who demand and depend on high performance. Bobcat® fluids, lubricants and filters are designed and formulated to meet the specific demands of Bobcat equipment. They're the best way to ensure that your Bobcat machine and attachments perform as designed. If you're in the auto parts store, you're in the wrong place.

Find genuine Bobcat fluids, lubricants and filters at your local Bobcat dealer.

Bobcat.com/AllAttach

ATTACHMENTS Plus

**OUR BRAND
FITS YOUR BRAND.**

Put Bobcat attachments to work – no matter what brand of loader you operate.

Just because it has the Bobcat brand doesn't mean you can't try it on for size. Did you know that many Bobcat attachments fit a variety of loader brands? That means you can expand your versatility with attachment choices from the world's leading attachment manufacturer, even if you don't have a Bobcat loader.

What's your job?

Check out hard-working Bobcat attachments for:

- Landscaping
- Construction
- Demolition and recycling
- Concrete and flatwork
- Agriculture and agribusiness



Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

 **Bobcat**®



SOIL CONDITIONER

The soil conditioner is a versatile, cost-effective attachment no landscaping crew should be without. Its carbide-tipped teeth pulverize the soil, ripping through clumps, leveling the ground and filling in pits and holes. Rocks and other debris are windrowed to the edge of the jobsite for easy cleanup and removal.

Bobcat
ADVANTAGE

PERFORMANCE CHALLENGE

Scan the code to compare soil conditioners side by side and see how the Bobcat soil conditioner is equipped to help you perform better on the job.

Also watch the quality and design comparison.



Prepare the land and lay a good foundation for growth.

- Prepare ground for seed, sod or trees
- Level ground, smooth ruts, clear debris and till soil
- Tear out sod
- Grade topsoil
- Cut swales

Specifications	48 in. Manual	72 in. Manual	72 in. Hydraulic*	72 in. High Flow*	84 in. Hydraulic*	84 in. High Flow*
Overall Length (A)	57.9 in. (1,471 mm)	67.9 in. (1,725 mm)				
Overall Width (B)	60.6 in. (1,539 mm)	86.2 in. (2,190 mm)	86.2 in. (2,190 mm)	86.2 in. (2,190 mm)	98.2 in. (2,495 mm)	98.2 in. (2,495 mm)
Height (C)	27.1 in. (688 mm)	26.5 in. (673 mm)				
Working Width (fully angled)	45.7 in. (1,161 mm)	65.0 in. (1,651 mm)	65.0 in. (1,651 mm)	65.0 in. (1,651 mm)	76.0 in. (2,431 mm)	76.0 in. (2,431 mm)
Degree of Angle	25 deg. left or right					
Number of Teeth	81	121	121	121	141	141
Operating Weight	636 lb. (288 kg)	1,110 lb. (504 kg)	1,110 lb. (504 kg)	1,110 lb. (504 kg)	1,268 lb. (575 kg)	1,268 lb. (575 kg)
Hydraulic Requirements	10-18 gpm	13-37 gpm	13-37 gpm	25-37 gpm	18-37 gpm	30-37 gpm
Tires	Pneumatic	Pneumatic	Foam-filled	Foam-filled	Foam-filled	Foam-filled
Float or Lock Position	Lock Only	Both	Both	Both	Both	Both
Depth Adjustment	Manual	Manual	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Angle Adjustment	Manual	Manual	Hydraulic	Hydraulic	Hydraulic	Hydraulic

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine * Attachment Control Kit required.



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



SOIL CONDITIONER

REPLACEABLE CARBIDE-TIPPED TEETH

Easily rip through hardpan and pulverize clumps for maximum ground penetration. Individual teeth are replaceable for easy attachment maintenance.

DIRECT-DRIVE HYDRAULIC MOTOR



Eliminates the need for sprockets and chains, resulting in a more durable product that requires minimal maintenance.

DRUM POSITIONING

To level and grade a surface, lock the drum for a box blade effect. Or place the drum in the float position to follow the contours of the terrain and prepare the soil without leveling sculpted land.

FOAM-FILLED TIRES

Featured on the 72- and 84-inch hydraulic and high-flow models, foam-filled tires protect your productivity by eliminating flat tires on the jobsite.

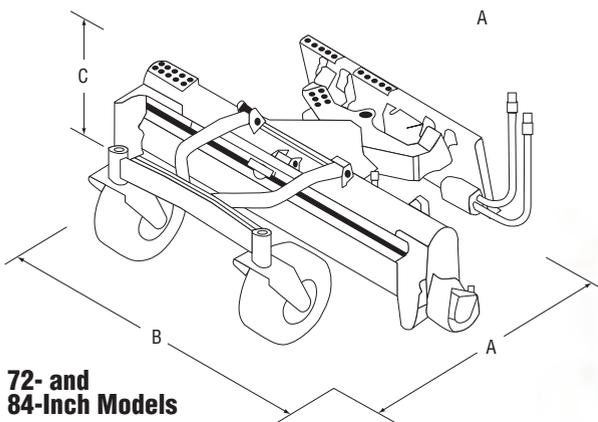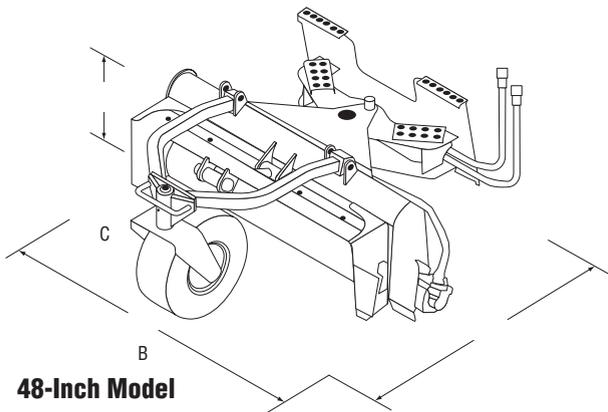

OSCILLATING BOLSTER

An oscillating bolster – standard on 72 inch and larger models – keeps the drum parallel to the ground to minimize the effect of bumps and potholes, resulting in a smoother finish in fewer passes. The oscillating bolster, combined with hydraulic depth and angle controls also make it easy to sculpt the land or cut swales for drainage.

FRONT BOLSTER

Designed with a wide stance, the front bolster provides enough room between the wheels and drum to let material in front of the drum, delivering better grade control. Flip the bolster up to create extra room for storage or when transporting.

INTEGRATED CONTROLS

Hydraulic and high-flow models feature hydraulic adjustment of angle and depth control which are easily controlled on the fly from the integrated controls inside the cab.

INCREASED DRUM TORQUE

High-flow models feature increased drum torque for moving more dirt and grading more efficiently. Increased drum torque is especially beneficial when operating in rich soils.

REMOVABLE END PLATES

When removable end plates are attached, soil in front of the drum is carried along like a box blade and fills in low spots for an even finish. Without, material is pushed to the side and can later be picked up with a bucket.

RUBBER FLAP

Keeps large material from going over the drum and allows finer material through.





SPREADER

- Maintain parking lots, sidewalks, driveways and alleys during winter
- Spread seed and fertilizer



THE SPREADER'S got it covered.

Need to spread sand and salt for winter maintenance? Or seed and fertilizer for lawn care? Whatever the job, the spreader attachment gets it done right and provides the versatility for all types of spreading jobs. The corrosion-free, all-poly hopper stands up to tough sand and salt combinations.



*Scan the code to see
the spreader in action.*

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



SPREADER

SP12 SPREADER

For the Toolcat 5600 *(shown at left)*

Equip your utility work machine to spread sand and salt with the SP12 spreader attachment. With a 13.5-cubic-foot hopper, the all-poly unit mounts in the cargo box and can hold more material for larger spreading jobs. A dash-mounted spreader control allows you to adjust the auger and spinner speed to spread material from 5 to 40 feet from inside the cab. Because the spreader mounts in the rear of the utility work machine, you can use a front-mounted attachment such as a blade, blower or broom to clear snow before spreading.

- Two dash-mounted variable-speed dials provide independent adjustment of the auger and spinner control directly from the operator's seat.
- A mesh screen at the top of the hopper filters large chunks of sand and salt for even, consistent flow.
- A three-stage baffle covers the auger and allows an operator to adjust the material flow required due to material granularity.



Specifications	SP12
Operating Weight (empty)	325 lb. (147 kg)
Height	44.7 in. (1,135 mm)
Width	48.5 in. (1,232 mm)
Length	78.5 in. (1,994 mm)
Hopper Capacity	13.5 ft. ³ (382 L)
Spreading Pattern	5-40 ft. (1.5-12.2 m)
Speed Control	Variable speed dial control
Motor	12-volt DC direct drive
Spinner Wheel Diameter	12.0 in. (305 mm)
Hopper Material	Plastic

HS8 SPREADER

Hydraulic Control and Convenience

The hydraulic spreader (HS8) attachment is the first hydraulic spreader from Bobcat. The self-loading hopper on the HS8 has an open top and can be used as a bucket, allowing an operator to efficiently fill the spreader from a pile rather than pour material into the top. With a 9.6-cubic-foot hopper, the spread pattern is controlled by a hydraulic motor and three material flow gates that spread from 18 to 28 feet. The three individual gates, located on the hopper, maintain the rate of material spread.

- Hopper grate filters unwanted debris from spread material.
- Self-loading hopper can be used as a bucket, filling the spreader from a pile. Quickly and efficiently reload the spreading material into the hopper for large coverage jobs.
- Hydraulic system controls spread pattern from 18 to 28 feet.



Specifications	HS8
Operating Weight (empty)	387 lb. (176 kg)
Height	40.9 in. (1,039 mm)
Width	54.4 in. (1,382 mm)
Length	32.0 in. (815 mm)
Hopper Capacity	9.6 ft. ³ (272 L)
Spreading Pattern	18-28 ft. (5.6-8.7 m)
Speed Control	Engine rpm
Motor	Hydraulic
Spinner Wheel Diameter	18.0 in. (457 mm)
Hopper Material	Metal

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, 5600 Toolcat™ Utility Work Machine, VersaHANDLER® TTC

OPTIONS AND ACCESSORIES

For the SP12 model:

Rear Spreader Light Kit: Includes a taillight mounted on the spreader that can be connected to the taillights of the Toolcat utility work machine.

For the HS8 model:

Sidewalk Kit:

Keeps spreading material from being cast out of the bounds of the sidewalk.





STABILIZER

Frame-mounted at the rear of the loader, this transfers the weight of the loader to the backhoe or tree spade attachment, giving the attachment more force to power through the dig. Street pads protect sensitive surfaces from damage and grouser bars help keep the loader from being pulled toward the work area. The rear stabilizer attachment also helps level and stabilize the loader on uneven terrain.

STUMP GRINDER

Grind tree stumps INTO MULCH.

An ideal attachment for landscaping contractors, homeowners with acreage, campus facilities, municipalities and rental contractors, the stump grinder mounts directly to the front of a carrier for maneuverability in tight areas and easy positioning over the stump.



STEEL TRACKS

Improve performance in rough, rocky and muddy conditions.

Easy-to-install steel tracks provide better flotation and reduced ground pressure when operating in tough environments. They also improve traction when working in soft and loose conditions. Compared to rubber tires, the steel tracks deliver better operating results and protect tires from wear and damage. After initial installation, steel tracks can be reinstalled in less than 30 minutes.

**90-DEGREE ANGLE MOUNT**

Mounted at a 90-degree angle to the operator, the stump grinder offers increased visibility to the cutting area, giving the operator the same wide view as with any pull-behind grinder.

AUXILIARY HYDRAULICS OPERATION

Stump grinder operates off the carrier's auxiliary hydraulics, eliminating an engine to maintain while operating.

CARBIDE-TIPPED TEETH

Efficiently rip through hard wood, providing long life and uptime protection for the attachment.

UNIQUE VALVE DESIGN

Reduces the possibility of the cutting wheel stalling while in the cut.

RUBBER DEFLECTING SHIELDS

Protect operators from wood chips.



**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



STUMP GRINDER

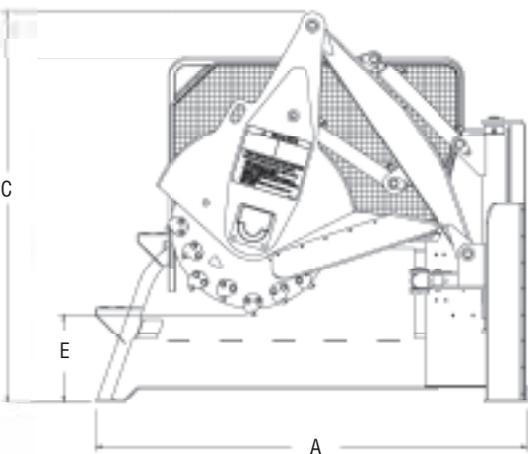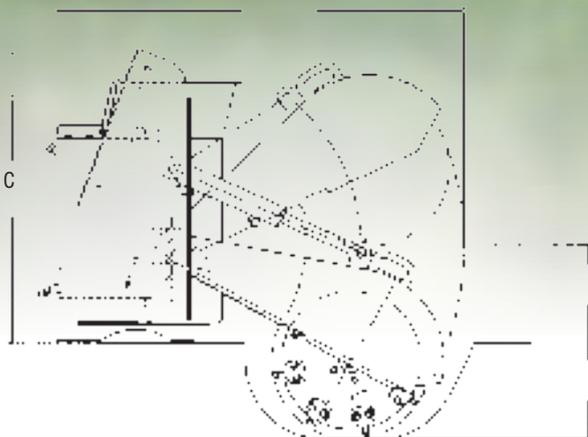

Scan the code to see the stump grinder in action.

Specifications	SG30	SG60	SGX60
Transport Width (A)	36.0 in. (914 mm)	65.8 in. (1,671 mm)	65.8 in. (1,671 mm)
Overall Length (B)	46.3 in. (1,175 mm)	45.0 in. (1,143 mm)	45.0 in. (1,143 mm)
Overall Height (C)	33.5 in. (851 mm)	59.4 in. (1,509 mm)	59.4 in. (1,509 mm)
Weight	460 lb. (209 kg)	980 lb. (445 kg)	995 lb. (451 kg)
Wheel Diameter w/Teeth	18.0 in. (457 mm)	27.0 in. (686 mm)	27.0 in. (686 mm)
Tip Speed	3,109-4,691 ft./min. (948-1,430 m/min.)	4,480-6,330 ft./min. (1,366-1,990 m/min.)	3,321-5,511 ft./min. (1,012-1,680 m/min.)
Number of Teeth	16	32	32
Max. Cutting Height (D)	11.0 in. (279 mm)	32.0 in. (813 mm)	32.0 in. (813 mm)
Max. Cutting Depth (E) (below grade)	11.0 in. (279 mm)	15.0 in. (381 mm)	15.0 in. (381 mm)
Max. Swing Arc	90 deg.	80 deg.	80 deg.
Hydraulic Flow	10-14 gpm (38-53 L/min.)	17-32 gpm (64-121 L/min.)	25-40 gpm (95-151 L/min.)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine



SWEEPER BROOM



SWEEP AND COLLECT DIRT AND DEBRIS IN ONE PASS.

When operating this tough attachment, poly bristles sweep and deposit debris in the sweeper bucket. Simply dump the material when the bucket is full. There is no need for multiple clean-up attachments. You can also use the sweeper to spread materials evenly across a jobsite. Ideal for construction, industrial and municipal jobs, the Bobcat® sweeper maintains optimal bristle-to-surface contact and delivers easy-to-use efficiency. Clean parking lots, sidewalks, docks and warehouses. Scrape mud and other caked-on materials from roadways, driveways and other jobsites.



Sweeps and collects
traveling forward



Sweeps and collects
traveling in reverse



Dumps/spreads material

**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



SWEEPER BROOM



Optional Gutter Brush



Optional Wheel Kit

OPTIONS AND ACCESSORIES

- **Bristles** Ideal for all sweeping conditions, poly bristles provide better flicking action for effective debris removal. Steel bristle and combo bristle (poly and steel) sections are also available for stubborn debris.
- **Water Kit** Keeps dust and debris under control when operating in tough environments, with jet nozzles spraying water evenly across a surface.
- **Gutter Brush** Clean curbs, alongside buildings and other hard-to-reach areas. Widens the sweeper's total width by one foot to allow more coverage per pass. Can be raised and stored vertically when not in use.
- **Wheel Kit** Available as an option for the 84-inch sweeper attachment, the wheel kit protects surfaces such as concrete, cobblestone and asphalt from scrapes and scratches by suspending the cutting edge of the sweeper during forward travel. Two mounted caster wheels are included in the kit.

REVERSIBLE CUTTING EDGE

Cut through caked-on mud and materials with the replaceable bucket cutting edge. It's reversible to last twice as long.

FORWARD AND REVERSE VERSATILITY

Operate the sweeper attachment going in either forward or reverse. Sweep in reverse with the cutting edge on the ground to sweep material into the bucket with the rotating poly bristles, similar to a broom and dust pan. In the forward direction, the bristles flick material forward against a rubber flap. From there, the material goes over the top of the bristles and is deposited into the bucket.

Scan the code to watch the sweeper in action.



Specifications	44 in.	54 in.	60 in.	72 in.	84 in.
Sweep Width	44.0 in. (1,118 mm)	54.0 in. (1,372 mm)	60.0 in. (1,524 mm)	72.0 in. (1,829 mm)	84.0 in. (2,134 mm)
Overall Width	48.3 in. (1,227 mm)	58.3 in. (1,481 mm)	66.2 in. (1,681 mm)	78.2 in. (1,986 mm)	89.9 in. (2,284 mm)
Weight	555 lb. (252 kg)	650 lb. (295 kg)	758 lb. (344 kg)	845 lb. (383 kg)	1,029 lb. (466 kg)
Bucket Capacity, Heaped	6.6 ft. ³ (0.19 m ³)	8.2 ft. ³ (0.23 m ³)	12.0 ft. ³ (0.34 m ³)	14.4 ft. ³ (0.41 m ³)	18.5 ft. ³ (0.52 m ³)
Bucket Capacity, Swept	5.3 ft. ³ (0.15 m ³)	6.6 ft. ³ (0.19 m ³)	8.6 ft. ³ (0.24 m ³)	10.4 ft. ³ (0.29 m ³)	11.8 ft. ³ (0.33 m ³)
Broom Diameter	21.4 in. (544 mm)	21.4 in. (544 mm)	21.4 in. (544 mm)	21.4 in. (544 mm)	24.0 in. (610 mm)
Bristle Material	Replaceable polypropylene sections (steel sections available)				
Cutting Edge	N/A	← Replaceable Steel →			
Broom rpm @ 15 gpm	185	185	217	217	215
Wheel Kit	N/A	N/A	N/A	N/A	Optional
Gutter Brush	N/A	N/A	Optional	Optional	Optional

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



3 PT. HITCH ADAPTER

Use Category I and II implements with Bobcat loaders and work machines.

Specifications

Operating Weight	272 lb. (123 kg)
Length	14.0 in. (356 mm)
Width	46.0 in. (1,168 mm)
Height	29.0 in. (737 mm)
3-Point Mounting Frame	Mounts to most standard Category I and Category II 3-Point Hitch attachments

The 3-point adapter adds even more versatility to your Bobcat® machine, enabling it to use Category I and II implements that meet the ASABE standard for 3-point hitches. Features include Bob-Tach® mounting system for quick-mounting, adjustable top link for added versatility and 2-inch receiver for towing trailers.

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat Utility Work Machine



ADJUSTABLE SKID SHOES

Deliver depth control for more precise tilling operation. Can be set to 2-, 4- or 6-inch depths.

BI-DIRECTIONAL ROTATION

Allows for top-cutting and under-cutting when operating in either direction, maximizing attachment versatility and increasing operating capabilities.

REPLACEABLE TINES

Hardened for maximum soil penetration, the double-edge tines break through clumps and tear through materials to deliver loosened soil for preparing the ground.

OFFSET MOUNTING

Enables tilling next to sidewalks, curbs and buildings, increasing jobsite capabilities.


DIRECT-DRIVE HYDRAULIC MOTOR

Delivers necessary operating power while reducing overall maintenance costs, extending the life of the attachment and eliminating the need for high-wear items such as gear boxes, chains, sprockets and shear pins.

TILLER

BREAK NEW GROUND.

Tear through clumps and hardened materials with the replaceable, double-edged tines of the tiller attachment. Till and mix the soil with compost materials to prepare the ground. The tiller attachment quickly turns a backyard plot into a soil bed for gardening.

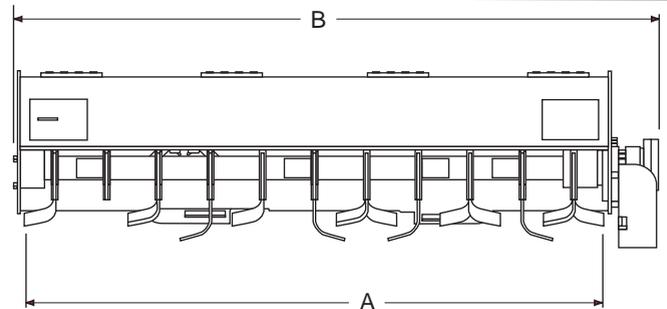**Bobcat**

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information




TILLER

- Tear through clumps and loosen soil
- Mix compost, fertilizer, manure and mulch into the soil
- Add amendments to flower beds
- Prepare land for planting
- Remove weeds between rows
- Till next to sidewalks, curbs and buildings



Scan the code to see the tiller in action.

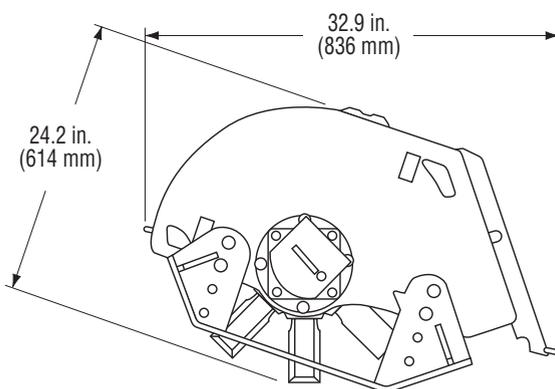

Specifications	40 in.	62 in.	76 in.
Working Width (A)	40.0 in. (1,016 mm)	62.0 in. (1,575 mm)	75.4 in. (1,915 mm)
Overall Width (B)	48.0 in. (1,219 mm)	71.0 in. (1,803 mm)	84.5 in. (2,146 mm)
Tines	28	36	44
Max. Working Depth	6.0 in. (152 mm)	6.0 in. (152 mm)	6.0 in. (152 mm)
Tine Rotation	Bi-rotational	Bi-rotational	Bi-rotational
Drive	Direct	Direct	Direct
Travel Direction	Forward/Reverse	Forward/Reverse	Forward/Reverse
Weight	502 lb. (228 kg)	684 lb. (310 kg)	773 lb. (351 kg)
Flow Range	9-18 gpm (34-68 L/min.)	17-37 gpm (64-140 L/min.)	17-37 gpm (64-140 L/min.)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine, VersaHANDLER® TTC



TREE SPADE

Dig & transplant trees with speed & PROFICIENCY.

The rugged, dependable tree spade attachment turns any loader into a transplanting unit, while also speeding up production and cutting labor costs. With its compact, short tower design, the tree spade easily squeezes between closely planted trees. Built for maximum durability, the reinforced attachment frame handles the bumps and bruises of a tough work environment. The tree spade works in a variety of soil conditions, maximizing worksite capabilities.



FINGERTIP CONTROL

Dig, transplant and package trees without leaving the operator's seat.



CONVERTIBLE VALVE

Allows for operation with Bobcat loaders as well as other brands.



EASY ACCESS STEP

Design of the frame allows for easy access to the loader.



COMPACT DESIGN

Allows for attachment operation in confined areas without damaging the landscape.



ADJUSTABLE LEGS

Allow for digging five different sizes with one tree spade.



OVERLAPPING BLADES

Ensure clean root cutting and support of the root-ball.



OPEN FRAME DESIGN

Provides excellent visibility to the base of the tree.



GREAT VISIBILITY



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.


For more information




TREE SPADE



Three-Blade Dimensions

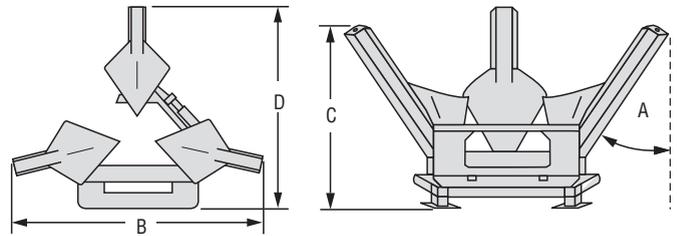

Four-Blade Dimensions

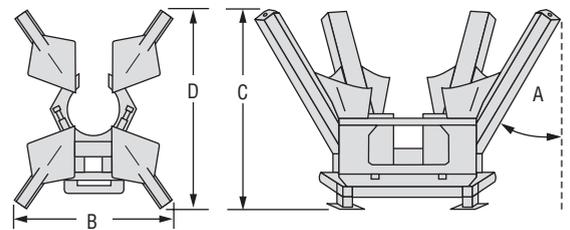

VALVE OPTIONS

A convertible valve option controls tree spade operation with fingertip controls on the steering levers or by using a pendant control box.

BLADE CONFIGURATIONS

Most tree spade models are available in truncated, modified and cone blade configurations. Select the right tree spade attachment for your specific machine and application.



Modified Blade: Has a tower angle of 25 degrees, allowing the tree spade to place the removed tree directly into a basket. It's the most popular choice for balled-and-burlapped tree harvesting, and it's excellent for loamy to sandy soils.



Cone Blade: Is popular for transporting and placing trees in sandy and hard-packed soils. It can also be used to place trees in baskets.

INSIDE FRAME DESIGN

The inside frame helps maintain the integrity of the root ball and allows for a more compact design.

BOBCAT ORANGE COLOR

Delivers better attachment visibility when digging.



Scan the code to see the tree spade in action.

	32 in.	Cone Blade	Modified Blade
Number of Blades: 3			
Blade Angle (A)		30 deg.	25 deg.
Width (B)		91.8 in. (2,332 mm)	76.0 in. (1,930 mm)
Height (C)		64.2 in. (1,631 mm)	58.7 in. (1,491 mm)
Length (D)		83.3 in. (2,116 mm)	74.2 in. (1,930 mm)
Max. Digging Depth		31.2 in. (792 mm)	25.9 in. (665 mm)
Bottom Opening Radius		0.8 in. (20 mm)	5.6 in. (142 mm)
Number of Blades: 3			
Blade Angle (A)		30 deg.	25 deg.
Width (B)		95.6 in. (2,428 mm)	79.8 in. (2,027 mm)
Height (C)		64.2 in. (1,631 mm)	58.7 in. (1,491 mm)
Length (D)		87.5 in. (2,223 mm)	78.4 in. (1,991 mm)
Max. Digging Depth		32.9 in. (836 mm)	29.4 in. (747 mm)
Bottom Opening Radius		2.2 in. (56 mm)	6.2 in. (157 mm)
Number of Blades: 4			
Blade Angle (A)		30 deg.	25 deg.
Width (B)		85.1 in. (2,162 mm)	77.7 in. (1,974 mm)
Height (C)		64.2 in. (1,631 mm)	66.6 in. (1,692 mm)
Length (D)		85.1 in. (2,162 mm)	78.5 in. (1,994 mm)
Max. Digging Depth		33.3 in. (846 mm)	31.0 in. (787 mm)
Bottom Opening Radius		5.6 in. (142 mm)	9.4 in. (239 mm)

Specifications	32 in.	36 in.	44 in.
Ball Diameter	26.0-33.0 in. (660-838 mm)	29.0-37.0 in. (737-940 mm)	36.0-45.0 in. (914-1,143 mm)
Tree Diameter	2.0-3.3 in. (51-84 mm)	2.0-3.8 in. (51-97 mm)	3.0-4.5 in. (76-114 mm)
Ball Weight	256-580 lb. (116-263 kg)	394-805 lb. (179-365 kg)	578-1,177 lb. (262-534 kg)
Spade Weight			
Cone	1,590 lb. (721.2 kg)	1,640 lb. (743.9 kg)	2,150 lb. (975 kg)
Modified	1,525 lb. (691.7 kg)	1,580 lb. (716.7 kg)	2,145 lb. (973 kg)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader



TRENCHER



Cut into the ground and create a trench through all soil conditions. The trencher is designed with the power and strength to dig in even the toughest, rocky soil types. Use the side-shift feature – manual or hydraulic, depending on the model – to dig a trench close to buildings, fences and other objects. Equip the trencher with different teeth and chain options to maximize trenching capabilities in different soil conditions.

The easy-to-use trencher attachment is built for improved trench digging and greater reliability on the jobsite. It's excellent for maintenance crews, municipalities, landscaping contractors and rental facilities.

TAKE ON TOUGH

For light to medium trenching jobs:

The LT112, LT113 and LT 213 deliver 2- to 3-foot dig depths. The LT112 and 113 feature manual side-shift for trenching close to buildings and other objects, while the LT213 may be equipped with optional hydraulic side-shift.

For medium- to heavy-duty trenching jobs:

Ideal for utility installation, the LT313 delivers a 3- to 4-foot depth and the LT414 delivers a 4- to 5-foot dig depth. The LT313 features manual side shift as standard and hydraulic side-shift is available. The LT414 features hydraulic side-shift as standard for trenching close to buildings and other objects. The LT414 is equipped with high-flow performance capabilities to harness the additional hydraulic horsepower capabilities of the machines equipped with high-flow hydraulics.

For heavy-duty trenching jobs:

The LT405 delivers a 3- to 5-foot dig depth and features hydraulic side-shift for trenching close to buildings and other objects. The LT405 is equipped with high-flow performance capabilities to harness the additional hydraulic horsepower capabilities of the machines equipped with high-flow hydraulics. Dual augers move spoil away from the trench.

AUGER

Designed with a large diameter, the auger moves material from the side of the trench, limiting the amount of spoil falling back into the trench.

GREASE CYLINDER TENSIONING

Quickly and easily adjust your chain to the proper tension.

STANDARD CRUMBER

Helps remove soil from the trench and provide a clean, smooth trench bottom.

REVERSE ROTATION

All trencher models are capable of momentarily reversing the chain direction to minimize stalling.

NARROW FRAME WIDTH

LT112 – LT414 are narrow enough to fit into a pickup box to make transportation easy.

POWERFUL OPERATION

From black dirt to gravel, the powerful operation of the trencher digs through even tough, rocky soil types.

SIDE-SHIFT

Provides attachment flexibility when working next to buildings or objects, allowing the trencher to achieve optimal productivity in all ground conditions and locations. Manual and hydraulic side-shift available, depending on the model.



TRENCHER

OPTIONS AND ACCESSORIES

Single Standard Cup Chain: The most basic chain features cupped teeth on every other section. Suitable for light to moderate digging in dirt, clay and loamy soils.



Double Standard Cup Chain: Cup teeth are mounted on every station. Works best in very muddy soils and loose sand.

Cup and Carbide Chain: Alternating cup teeth and carbide bullet teeth in a double standard pattern. Works best in very hard soils, frozen ground and fracturable rock.

Shark/Cup Teeth: Features a combination of cup teeth and shark teeth. Works best in hard soils, fracturable rock and ground with rocky soil.



Scan the code to see the trencher in action.

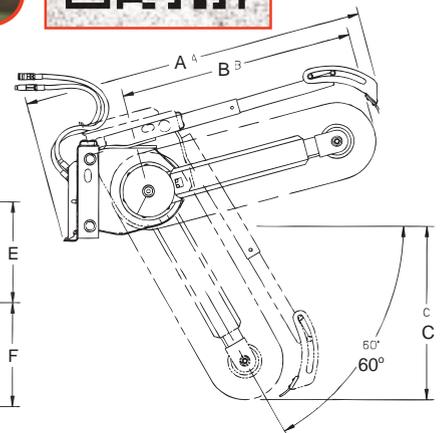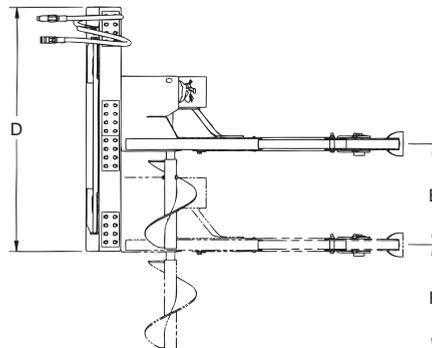

trenching jobs.

Specifications	LT112	LT113	LT213	LT313 (3 ft.)	LT313 (4 ft.)	LT414 (4 ft.)	LT414 (5 ft.)	LT405
Side Shift	Manual side-shift	Manual side-shift	Manual side-shift*	Manual side-shift*	Manual side-shift*	Hydraulic side-shift	Hydraulic side-shift	Hydraulic side-shift
Chain (double standard ABF)	1.7 in. (42 mm)	1.7 in. (42 mm)	1.7 in. (42 mm)	2.0 in. (51 mm)	2.0 in. (51 mm)	2.0 in. (51 mm)	2.0 in. (51 mm)	2.0 in. (51 mm)
Auger	12.0 in. (305 mm) diameter single removable auger	12.0 in. (305 mm) diameter single removable auger	12.0 in. (305 mm) diameter single removable auger	14.0 in. (356 mm) diameter single removable auger	14.0 in. (356 mm) diameter single removable auger	12.0-14.3 in. (305-362 mm) step auger	12.0-14.3 in. (305-362 mm) step auger	12.0 in. (305 mm) diameter dual augers
Chain Tensioning	Grease cylinder	Grease cylinder	Grease cylinder	Grease cylinder				
Chain Options Available	Multiple	Multiple	Multiple	Multiple	Multiple	Multiple	Multiple	Multiple
Operating Weight (without teeth)	615 lb. (279 kg)	640 lb. (290 kg)	725 lb. (329 kg)	955 lb. (433 kg)	980 lb. (444 kg)	1,188 lb. (539 kg)	1,225 lb. (556 kg)	1,520 lb. (689 kg)
Trenching Widths Available	4.0-8.0 in. (102-203 mm)	4.0-8.0 in. (102-203 mm)	4.0-8.0 in. (102-203 mm)	6.0-12.0 in. (152-305 mm)	6.0-12.0 in. (152-305 mm)	6.0-12.0 in. (152-305 mm)	6.0-8.0 in. (152-203 mm)	6.0-12.0 in. (152-305 mm)
Flow Range	9-15 gpm (34-57 L/min.)	9-15 gpm (34-57 L/min.)	11-18 gpm (42-68 L/min.)	15-24 gpm (57-91 L/min.)	15-24 gpm (57-91 L/min.)	26-40 gpm (98-151 L/min.)	26-40 gpm (98-151 L/min.)	26-40 gpm (98-151 L/min.)
Max. Operating Pressure	3,000 psi (20,684 kPa)	3,000 psi (20,684 kPa)	3,300 psi (22,753 kPa)	3,500 psi (24,132 kPa)	3,500 psi (24,132 kPa)	3,500 psi (24,132 kPa)	3,500 psi (24,132 kPa)	3,500 psi (24,132 kPa)
A. Overall Length	60.7 in. (1,542 mm)	74.0 in. (1,880 mm)	74.0 in. (1,880 mm)	79.5 in. (2,019 mm)	89.5 in. (2,273 mm)	90.0 in. (2,286 mm)	90.0 in. (2,286 mm)	105.3 in. (2,667 mm)
B. Standard Boom Length	39.4 in. (1,000 mm)	52.5 in. (1,334 mm)	52.5 in. (1,334 mm)	55.5 in. (1,410 mm)	65.5 in. (1,664 mm)	65.0 in. (1,651 mm)	79.0 in. (2,007 mm)	63.0 in. (1,600 mm)
C. Dig Depth @ 60 degrees	24.0 in. (610 mm)	36.0 in. (915 mm)	36.0 in. (915 mm)	36.0 in. (915 mm)	48.0 in. (1,219 mm)	50.0 in. (1,270 mm)	62.0 in. (1,575 mm)	36.0-60.0 in. (914-1,524 mm)
D. Frame Width	36.0 in. (915 mm)	36.0 in. (915 mm)	56.0 in. (1,422 mm)	56.0 in. (1,422 mm)	56.0 in. (1,422 mm)	56.3 in. (1,429 mm)	56.3 in. (1,429 mm)	65.0 in. (1,651 mm)
E. Side-Shift Travel	16.1 in. (409 mm)	16.1 in. (409 mm)	23.1 in. (587 mm)	23.1 in. (587 mm)	23.1 in. (587 mm)	21.8 in. (554 mm)	21.8 in. (554 mm)	26.0 in. (660 mm)
F. Auger Clearance	13.8-15.8 in. (351-401 mm)	13.8-15.8 in. (351-401 mm)	13.8-15.8 in. (351-401 mm)	24.0-27.0 in. (610-686 mm)	24.0-27.0 in. (610-686 mm)	23.4-26.4 in. (594-671 mm)	23.4-26.4 in. (594-671 mm)	19.0 in. (483 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Mini Excavator, Toolcat™ Utility Work Machine, VersaHANDLER® TTC

*Optional hydraulic side-shift available. Hydraulic side-shift to right.



TRENCH COMPACTOR

When the digging is done, finish the job.

This attachment is ideal for locations such as backyards, golf courses and parks. It finishes off any trenching job, working to power down and compress the soil for a neatly packed trench. The large, wheel-type compactor compresses soil down in the trench, using a vibratory shaker box for optimum compaction in any soil type. To ensure proper rpm, the vibratory shaker box features a built-in flow regulator.

Specifications

Operating Weight	1,400 lbs. (635 kg)
Length	57.0 in. (1,448 mm)
Height	59.0 in. (1,499 mm)
Width	48.0 in. (1,219 mm)
Wheel Diameter	46.5 in. (1,181 mm)
Working Depth	27.0 in. (686 mm)
Working Width Standard Pad	4.5-6.8 in. (114-171 mm)
Working Width Wide Pad	8-10.3 in. (203-260 mm)
Dynamic Force	7,000 lb. (3,175 kg)
Vibrations Per Minute	2,200 @ 18 gpm

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader



MOVE MATERIALS FASTER.

UTILITY FORK



The utility fork is shown here paired with the utility grapple attachment. See the utility grapple on pages 80 and 81 to learn more.



Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



UTILITY FORK



BOB-TACH ATTACHMENT MOUNTING SYSTEM

Makes easy work of attaching and detaching the utility fork. Hook up or remove in less than a minute.

REPLACEABLE TEETH

Utility fork teeth are replaceable for easy attachment maintenance, providing great performance, long attachment life and maximized productivity. Teeth are forged to provide strength with minimal weight. Add additional teeth to narrow the space between fork tines.




OPTIONS AND ACCESSORIES

Utility Grapple: For added versatility, pair the utility fork with the utility grapple and sink into hard-to-handle materials. Scrape, lift and move loose materials such as manure, bedding and hay. Or get a grip on hard-to-grab loads such as posts and fencing.

Handle materials easier.

Handle bundled material, loose straw, manure and other hard-to-grab materials with the Bobcat® utility fork. Strong, replaceable, tapered teeth handle a variety of farm chores easily and efficiently. Use the exclusive Bob-Tach® mounting system to quickly secure the utility fork to the carrier.

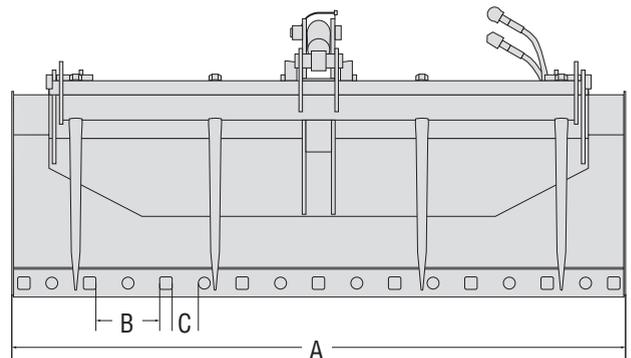

Fork	Weight	A – Overall Width	Standard Number of Teeth	B – Spacing Between Std No. of Teeth	Max. Number of Teeth	C – Spacing Between Max. Number of Teeth
36 in.	200 lb. (91 kg)	34.5 in. (905 mm)	5	8.2 in. (208 mm)	9	4.1 in. (104 mm)
54 in.	280 lb. (127 kg)	53.9 in. (1,370 mm)	7	8.2 in. (208 mm)	13	4.1 in. (104 mm)
60 in.	304 lb. (138 kg)	59.9 in. (1,522 mm)	8	8.2 in. (208 mm)	15	4.1 in. (104 mm)
66 in.	330 lb. (150 kg)	66.5 in. (1,690 mm)	9	8.2 in. (208 mm)	17	4.1 in. (104 mm)
72 in.	356 lb. (161 kg)	72.5 in. (1,842 mm)	10	8.2 in. (208 mm)	19	4.1 in. (104 mm)
80 in.	388 lb. (176 kg)	80.0 in. (2,032 mm)	11	8.2 in. (208 mm)	19	4.1 in. (104 mm)


Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine



UTILITY GRAPPLE

Sink into hard-to-handle LIGHT MATERIAL.

The utility grapple bites down and takes hold of even the loosest materials. Pair the grapple with a fork or bucket to handle a wide variety of farm and ranch jobs. The compact design of the utility grapple allows you to get the fork or bucket close to fences or sides of stalls to quickly clean up or move material – on the farm or anywhere you have to move light, loose material.

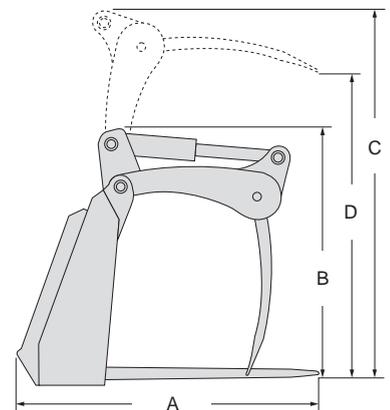

Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



UTILITY GRAPPLE



CURVED TEETH

Pull materials into the grapple, scooping up even the loosest material. Teeth are replaceable to minimize downtime.


FORGED TEETH

Provide exceptional strength with low weight, allowing for more carrying capacity.




MATCH THE TOOL TO THE JOB: ADDITIONAL TEETH

Quickly and easily add more teeth. In just minutes, you're ready to handle smaller materials efficiently.

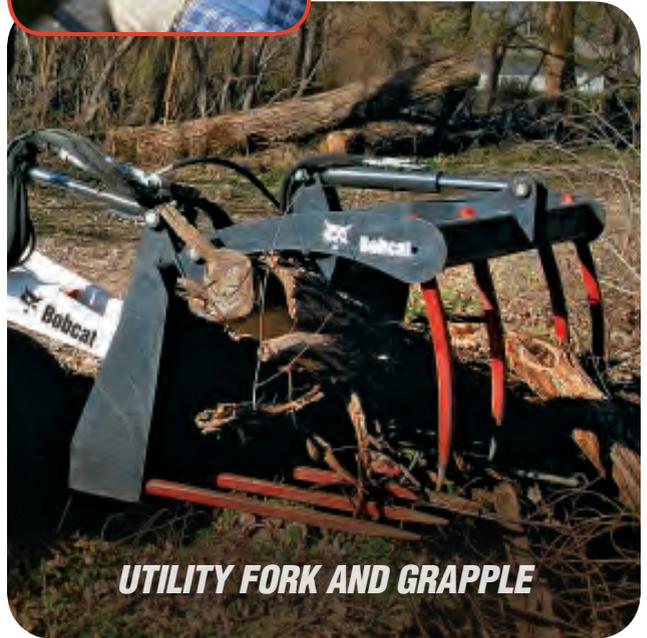

UTILITY FORK AND GRAPPLE

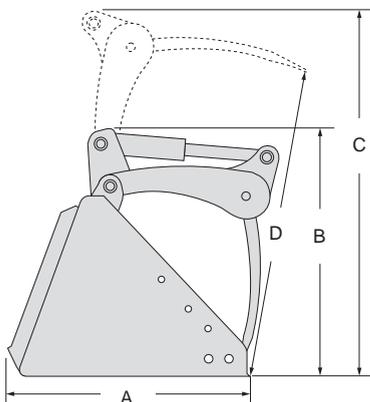

Grapple	Grapple Only Operating Weight	Standard Number of Teeth	Max. Number of Teeth	A – Length	B – Overall Height (Grapple Closed)	C – Overall Height (Grapple Open)	D – Max. Opening
32 in. with 36-54 in. Utility Forks	157 lb. (71 kg)	3	5	31.7 in. (805 mm)	29.5 in. (749 mm)	42.5 in. (1,080 mm)	32.6 in. (828 mm)
32 in. with General Purpose Bucket	157 lb. (71 kg)	3	5	29.8 in. (757 mm)	27 in. (686 mm)	40.2 in. (1,021 mm)	31.9 in. (810 mm)
55 in. with General Purpose Bucket	180 lb. (82 kg)	4	8	32.7 in. (831 mm)	29.4 in. (747 mm)	41.9 in. (1,063 mm)	31.3 in. (795 mm)
55 in. with Construction/Industrial Bucket	243 lb. (110 kg)	4	8	34.3 in. (871 mm)	29.3 in. (744 mm)	41.9 in. (1,064 mm)	31.3 in. (795 mm)
55 in. with Low Profile Bucket	243 lb. (110 kg)	4	8	34.3 in. (871 mm)	29.3 in. (744 mm)	41.9 in. (1,064 mm)	30.4 in. (772 mm)
55 in. with 60-80 in. Utility Forks	243 lb. (110 kg)	4	8	34.8 in. (884 mm)	29.9 in. (759 mm)	42.3 in. (1,074 mm)	29.9 in. (759 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Mini Track Loader, Toolcat™ Utility Work Machine



VIBRATORY ROLLER

The vibrating action of the roller allows the base material to realign and compact from the bottom up. A hydraulic motor drives a centrifugal weight on the drum shaft that provides the compacting action. This agile attachment is ideal for site preparation operations, landscaping contractors and paving operations, delivering faster results in fewer passes. It's also easy to haul over the road. A water kit for dust suppression is available as well.

BI-DIRECTIONAL OPERATION

Dual-direction vibration motor permits compaction while traveling in either direction.

ISOLATION MOUNTING SYSTEM


Reduces vibration transferred to the operator, meaning less operator fatigue and more comfortable working conditions. Also, affords more consistent pressure to the ground delivering constant compacting results.

DRUM OSCILLATION

Free drum oscillation keeps more of the drum in contact with the surface on uneven terrain.

OIL-BATH BEARING

Designed to avoid costly downtime, the oil-bath bearings eliminate the need for daily greasing.

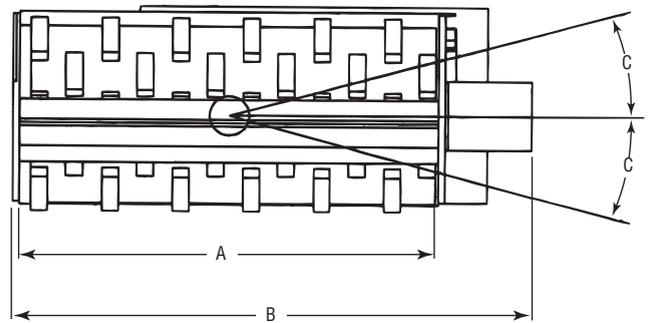

VIBRATORY PLOW

Plow in and work below the ground.

Designed for mini track loaders, the vibratory plow attachment is the ideal tool for installing pipe and cable with minimal ground disturbance. Dig down with the adjustable plow blade: a coultter wheel cuts sod immediately ahead of the plow blade while the pressure foot holds existing sod down and protects the surrounding area as the blade moves up and down. The result is a knife-like slit that almost disappears as the machine drives over the cut.



Specifications	48 in.	73 in.	80 in.
Drum Width (A)	48.0 in. (1,219 mm)	73.0 in. (1,854 mm)	80.0 in. (2,032)
Overall Width (B)	60.5 in. (1,536.7 mm)	79.0 in. (2,006.6 mm)	86.0 in. (2,184.4 mm)
Drum Offset	9.0 in. (228.6 mm) to right	Centered	Centered
Covers Right Side Tires on	66.0 in. (1,676 mm) wide loaders	72.0 in. (1,829 mm) wide loaders	80.0 in. (2,032 mm) wide loaders
Drum Diameter			
Padded	25.4 in. (645 mm)	25.4 in. (645 mm)	N/A
Smooth	26.0 in. (660 mm)	26.0 in. (660 mm)	26.0 in. (660 mm)
Number of Pads (Padded Drum)	78	102	N/A
Drum Oscillation (C)	± 15 deg.	± 7.5 deg.	± 7.5 deg.
Dynamic Force	10,519 lb. @ 17 gpm (4,771 kg @ 64 L/min.)	9,905 lb. @ 20 gpm (4,493 kg @ 76 L/min.)	9,905 lb. @ 20 gpm (4,493 kg @ 76 L/min.)
	14,244 lb. @ 20 gpm (6,461 kg @ 76 L/min.)	14,263 lb. @ 24 gpm (6,470 kg @ 91 L/min.)	14,263 lb. @ 24 gpm (6,470 kg @ 91 L/min.)
	2,448 vpm @ 17 gpm (64 L/min.)	2,401 vpm @ 20 gpm (76 L/min.)	2,401 vpm @ 20 gpm (76 L/min.)
Frequency (vibrations per minute)	2,879 vpm @ 20 gpm (76 L/min.)	2,882 vpm @ 24 gpm (91 L/min.)	2,882 vpm @ 24 gpm (91 L/min.)
Operating Weight			
Padded	1,778 lb. (807 kg)	2,189 lb. (993 kg)	N/A
Smooth	1,788 lb. (811 kg)	2,208 lb. (1,002 kg)	2,320 lb. (1,052 kg)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader

Specifications

Plow Depth	6.0-18.0 in. (152-457 mm)
Weight	520 lb. (235.9 kg)
Height	31.0 in. (787 mm)
Width	36.0 in. (914 mm)
Length	36.6 in. (930 mm)
Hydraulic Flow Range	10-14 gpm
Max. Hydraulic Pressure	3,000 psi

Approved Machine: Mini Track Loader



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

For more information



WATER KIT

Keep dust, dirt and debris under control.

When working in residential and urban areas, use the water kit attachment to control dust levels on the jobsite. It is a perfect complement to the angle broom, sweeper, planer and vibratory roller attachments. Its high-capacity water tanks mount either on the uprights or in the cargo bed, depending on the carrier. Their high-capacity tank volume minimizes refilling, meaning longer operating time with the attachment. Control water pump operation with the on/off switch, conveniently located in the carrier cab.



Specifications

Operating Weight (empty)	165 lb. (75 kg)
Operating Weight (full)	474 lb. (215 kg)
Tank Capacity (each tank)	14 gal. (53 L)
Max. Flow Rate (per nozzle)	0.28 gpm (1.06 L/min.)


NOTE: Toolcat™ utility work machine uses SPR80 water kit

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader, Toolcat™ Utility Work Machine

WHEEL SAW

Cut through asphalt, concrete, frozen ground and wire mesh.

Cut trenches for installing water, gas, electrical, utility and fiber-optic cable lines or prepare pavement for repairs. Powered by the carrier's high-flow hydraulics, the wheel saw cuts through asphalt, concrete and other materials to produce a perfect trench for installing utility lines. The hydraulic depth adjustment gauge delivers a consistent, uniform cut depth. For operating close to curbs and walls, the hydraulic side-shift allows the attachment to shift flush with any nearby object for a close cut.

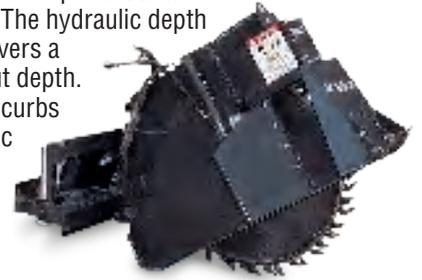

Specifications

	WS18	WS24
Overall Width	68.5 in. (1,740 mm)	68.5 in. (1,740 mm)
Overall Length	69.0 in. (1,753 mm)	74.0 in. (1,880 mm)
Overall Height	64.0 in. (1,626 mm)	81.0 in. (2,057 mm)
Weight (w/o wheel and trench cleaner)	1,567 lb. (711 kg)	1,865 lb. (846 kg)
Hydraulic Side Shift	25.6 in. (650 mm)	25.6 in. (650 mm)
Hydraulic Flow Required	25-40 gpm (95-151 L/min.)	25-40 gpm (95-151 L/min.)
Trenching Depth	6.0-18.0 in. (152-457 mm)	8.0-24.0 in. (203-610 mm)

Approved Machines: Skid-Steer Loader, Compact Track Loader, All-Wheel Steer Loader

BOBCAT POWERS YOUR VERSATILITY.



Whether you own a loader, excavator, telehandler, or utility work machine, your Bobcat® machine is a versatile tool carrier that's fully equipped to run numerous job-matched attachments. Built for attachment performance, Bobcat equipment includes unique features that make you more productive. Variable flow hydraulics, dual-direction detent, fingertip auxiliary controls, horsepower management – and more – help you use more attachments more efficiently so you get the job done faster and easier.

TRAIN NOW

And make safety part of the picture.

Productivity and safety are always a top priority with equipment owners, especially when new operators are on the job. These step-by-step courses introduce operators to the basics of machine and attachment operation, as well as service and safety.

Sound valuable? Industry professionals think so.

- Recommended by insurance companies
- Encouraged by safety organizations
- Used by Bobcat® dealers and customers nationwide



TRAINING & SAFETY

PREPARE TO PERFORM



Bobcat

Bobcat
ADVANTAGE
SAFETY AND TRAINING



Bobcat

Bobcat®, the Bobcat logo, and the colors of Bobcat machines are trademarks of Bobcat Company.

Attachment training resources for the backhoe, planer and forestry cutter attachments are available at your Bobcat dealer – or purchase online at Bobcat.com/safety



PIONEERING MANEUVERABILITY

Bobcat introduced its first compact loader in 1958 and two years later, the world's first skid-steer loader. This created an entire industry of machines that put the power of large equipment in a compact size with unmatched maneuverability.

OFFERING MORE VERSATILITY

In 1970 Bobcat invented the first quick-change attachment system for skid-steer loaders, known as the Bob-Tach® mounting system. Today we offer more attachments than anyone in the world, empowering customers to transform all of our machines into multi-task attachment carriers and reach higher levels of production.

ONE TOUGH ANIMAL™

All over the world, Bobcat® equipment is known for being durable and dependable. By lasting longer and minimizing downtime, we help our customers become as successful as possible.

HELP WHEN YOU NEED IT

With 50 years of experience and more than 550 locations, we offer the best dealer network in the country for compact equipment. Our dealers offer a quality sales force, dependable parts departments and qualified service technicians, all leading to a quality customer experience.



A CONSTANT INNOVATOR

In the late 1950s, a turkey farmer needed help — so in 1958 we introduced what was to become the world's first skid-steer loader. We created an industry by listening to the needs of the customer. This focus is the same today. In 2000, a superintendent needed help — so we built the world's first Toolcat™ utility work machine. We continue to be a global leader in innovation by listening to our customers.

LEADER BY DESIGN

Listening to the customer and a pioneering spirit are why Bobcat continues to lead the evolution of compact equipment ...

- 1960** – Invented the **FIRST** true skid-steer loader.
- 1970** – Invented the **FIRST** attachment mounting system for skid-steer loaders.
- 1977** – Built the **FIRST** skid-steer loader with no chain adjustments required. Still a Bobcat exclusive.
- 1981** – Introduced the **FIRST** secondary restraint seat bar.
- 1983** – The **FIRST** skid-steer loader with a transversely mounted engine. Still a Bobcat exclusive.
- 1990** – Introduced the **FIRST** compact excavator manufactured in the U.S.
- 1999** – Introduced the **FIRST** compact track loader with a solid-mounted undercarriage manufactured in the U.S.
- 2001** – Invented the **FIRST** loader with all-wheel steer and skid-steer capabilities. Still a Bobcat exclusive.
- 2003** – Revolutionized the way the world works with the invention of the Toolcat line, the world's **FIRST** utility work machines — a cross between a pickup, attachment carrier and utility vehicle. Still a Bobcat exclusive.
- 2006** – Introduced the **FIRST** utility vehicle with RapidLink™ attachment mounting system.
- 2008** – Roller Suspension™, the **FIRST** all-steel suspension system, was introduced.
- 2009** – Launched M-Series compact excavators and loaders.
- 2011** – The M-Series loader models S850 and T870 became the largest and most powerful in our lineup.
- 2012** – Bobcat introduced two new sizes of extendable-arm excavator options that are both attachment and clamp-ready.
- 2013** – The M-Series 500 frame-size loaders replaced the popular S185 and T190 (among many others). This loader size is the most popular in the world and has been for two decades.
- 2014** – Bobcat launches the 400 frame-size loaders, completing the M-Series line; manufactures its one-millionth loader; introduces its own Tier 4, non-DPF engines; and opens the Bobcat Acceleration Center, a dedicated innovation, testing and technology facility.
- Today** – There are more Bobcat skid-steer loaders at work around the world than all other brands combined.
- Today** – Bobcat manufactures more attachments than anyone in the world.
- Today** – Bobcat is the only company that offers operator training kits for compact equipment.
- Today** – Bobcat offers a full range of extendable-arm options, three sizes fitting five different excavator models.
- Today** – Compact track loaders are rapidly becoming the product of choice in many market segments.



Compact Wheel Loader

1958



Skid-Steer Loader

1960



Bob-Tach Mounting System

1970



Compact Excavators

1986



Compact Track Loaders

1999



Mini Track Loaders

2001



Toolcat Utility Work Machines

2003



1st Utility Vehicle with RapidLink

2006

50

Years

2008



M-Series Compact Excavators & Loaders

2009 to 2014



One-Millionth Loader

2014

One Tough Animal™

The Bobcat Attachments Advantage: Bobcat® attachments are engineered and manufactured to fit Bobcat machines for optimum job performance, dependability and durability.



NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

Bobcat® and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2015 Bobcat Company. All Rights Reserved.



Bobcat®

B-1875 (5/15)

Bobcat Company • P.O. Box 6000 • West Fargo, ND 58078

Visit Bobcat.com/AllAttach for more information

Printed in U.S.A.

QD-45M-515-29118-7-F