

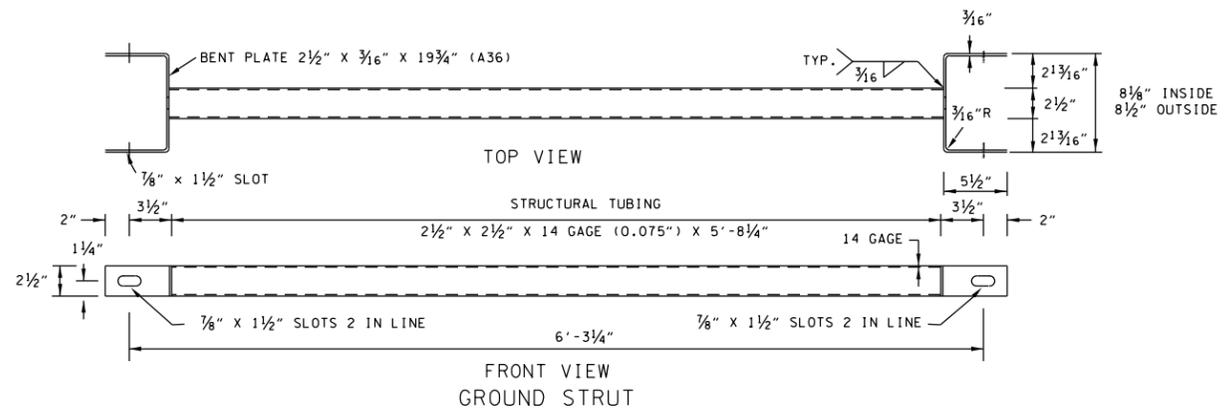
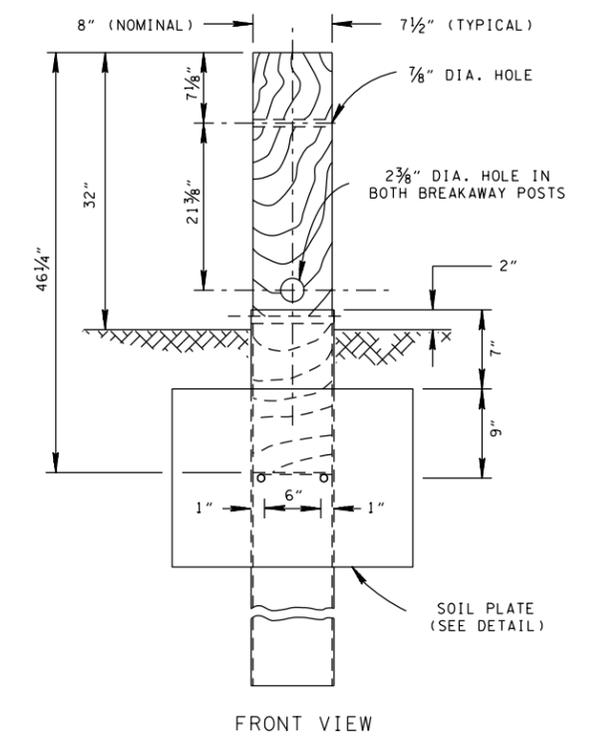
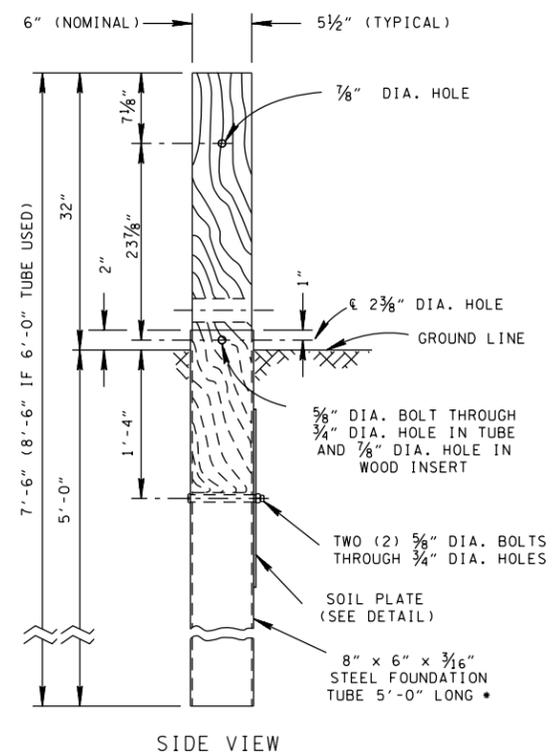
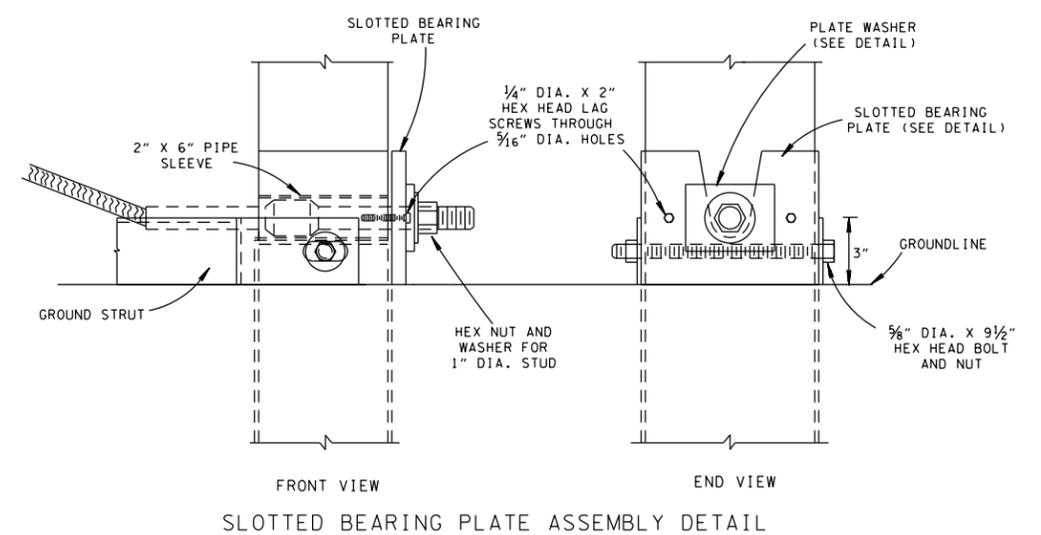
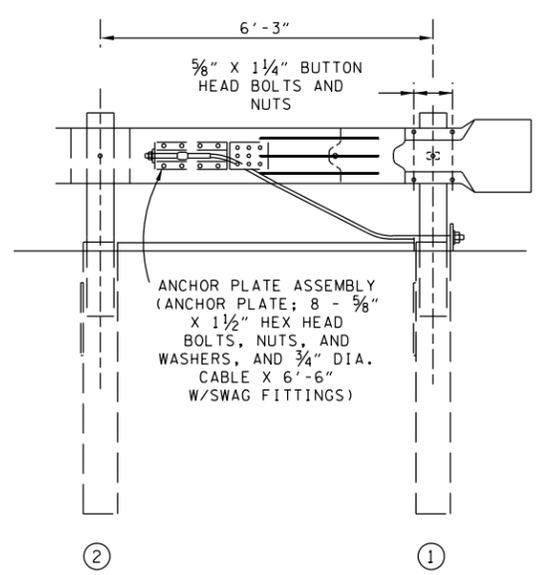
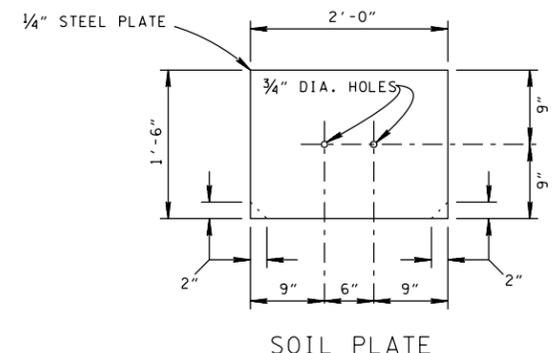


REV. 5-1-15: REVISED NO. 1 & 2 BREAKAWAY POSTS WITH 5'-0" TUBE SLEEVE.


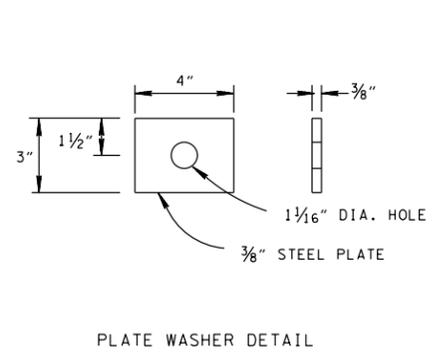


NO. 1 & 2 BREAKAWAY POSTS WITH 5'-0" TUBE SLEEVE
ALTERNATE 6'-0" TUBE SLEEVE WITHOUT SOIL PLATE MAY BE USED

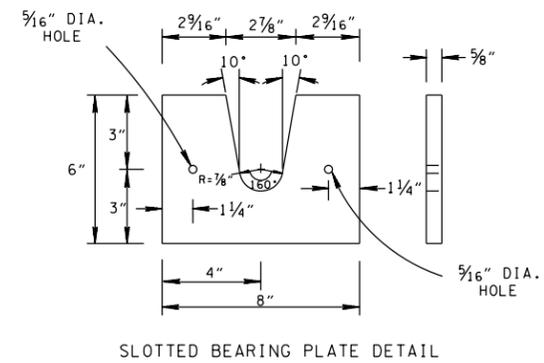

NOTE: THE CONTRACTOR HAS THE OPTION OF CLIPPING 2" x 2" TRIANGLES OFF BOTTOM CORNERS TO AID IN DRIVING. (TO BE ATTACHED TO BREAKAWAY POST NOS. 1 & 2 ON SIDE OPPOSITE TO END TERMINAL SECTION)

- GENERAL NOTES
- (A) THE NO. 1 AND NO. 2 BREAKAWAY POSTS WILL HAVE A 6" x 8" (NOMINAL) CROSS-SECTION AREA AND WILL HAVE A 2 3/8" DIAMETER HOLE CENTERED 2'-0" BELOW THE TOP OF THE POST ON THE 8" SIDE AS SHOWN. ALL POSTS SHALL BE ERRECTED SO THAT THE GUARDRAIL WILL HAVE A TOP-OF-RAIL HEIGHT OF 2'-7".
 - (B) ALL HOLES IN WOOD POSTS ARE TO BE DRILLED BEFORE PRESERVATIVE TREATMENT.
 - (C) ALL CUTTING, DRILLING, AND WELDING OF STEEL COMPONENTS SHALL BE DONE BEFORE GALVANIZING.
 - (D) THE FINISHED CABLE ASSEMBLY WILL NOT BE ACCEPTABLE UNLESS IT IS IN TENSION WITH NO SAG.
 - (E) OTHER ANCHOR CABLE ASSEMBLIES PROVIDING A MINIMUM BREAKING STRENGTH OF 40,000 POUNDS PER SQUARE INCHES WILL BE ACCEPTABLE.
 - (F) COST OF ANCHOR TO BE INCLUDED IN THE COST OF END TERMINAL EXCEPT AS STATED IN NOTE (G).
 - (G) IF USED WITHOUT END TERMINAL TO BE PAID UNDER ITEM NO. 705-04.05 GUARDRAIL TERMINAL (TYPE IN LINE) PER EACH. (SEE S-PL-2)

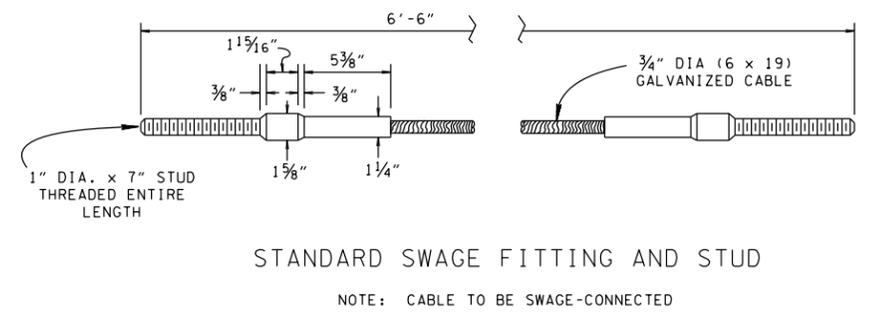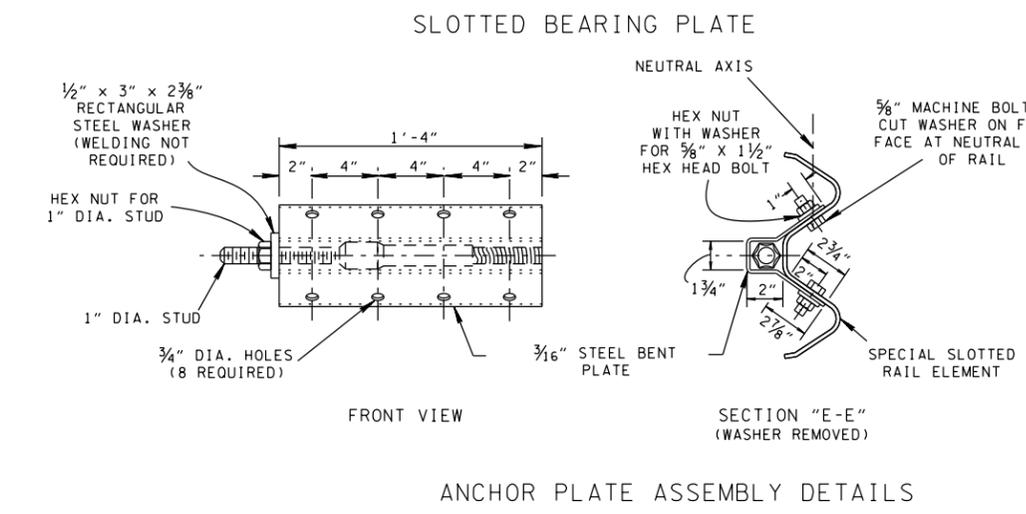

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.