


LEFT LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS (FOR 40 MILES PER HOUR AND GREATER)

- ❑ REV. 9-1-05: REMOVED TYPE "C" WARNING LIGHTS FROM FLEXIBLE DRUMS IN TAPER. REMOVED TYPE "C" WARNING LIGHT NOTE FROM GENERAL NOTES.
- ❑ REV. 4-15-99: ADDED GENERAL NOTE ④.
- ❑ REV. 4-2-12: CHANGED G20-2A TO G20-2, ADDED CHANNELIZATION TO PROTECT LEFT TURN LANE.
- ❑ REV. 4-15-04: CHANGED W4-2 SIGN. CHANGED GENERAL NOTES ③ AND ④ TO COMPLY WITH 2003 MUTCD.

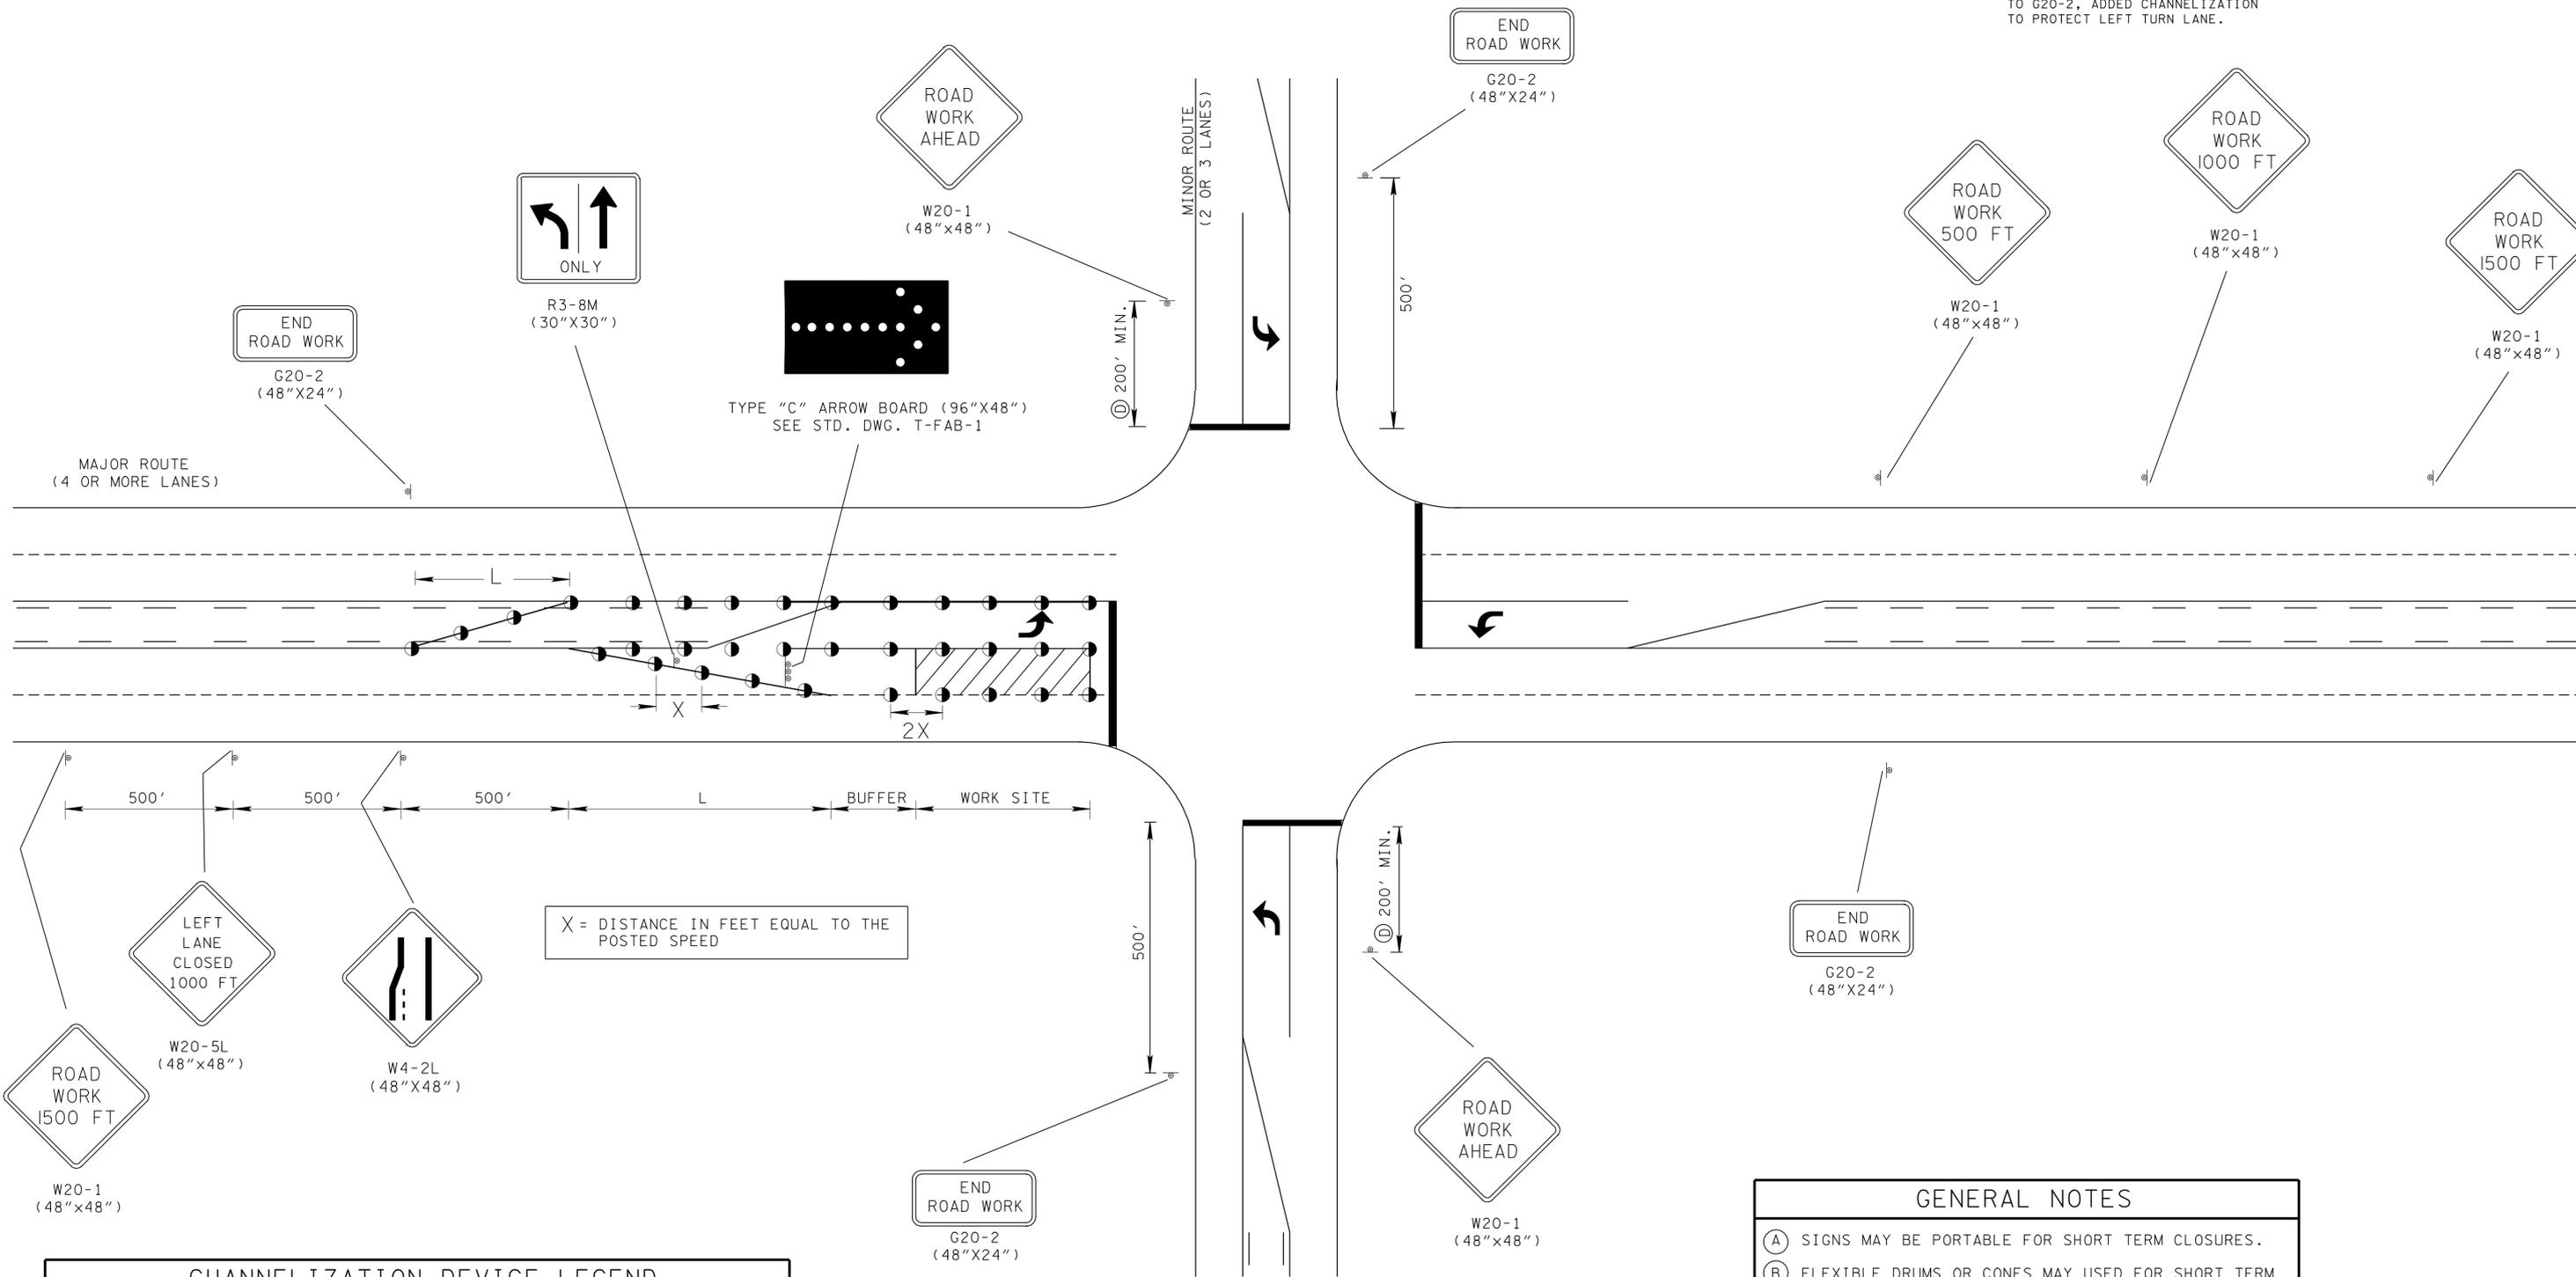

X = DISTANCE IN FEET EQUAL TO THE POSTED SPEED

CHANNELIZATION DEVICE LEGEND	
●	FLEXIBLE DRUMS
	SIGN SUPPORT
▨	WORK SITE
●●●●●	FLASHING YELLOW ARROW BOARD (SEE STD. DWG. NO. T-FAB-1, FOR DETAILS AND SPECIFICATIONS)

COMPUTATION FOR DISTANCE L
L = W X S (FOR POSTED SPEEDS OF 45 MPH OR GREATER)
$L = \frac{W X S^2}{60}$ (FOR POSTED SPEEDS OF 40 MPH OR LESS)
L = TAPER LENGTH IN FEET W = WIDTH OF OFFSET IN FEET S = POSTED SPEED

- | GENERAL NOTES | |
|---------------|--|
| A | SIGNS MAY BE PORTABLE FOR SHORT TERM CLOSURES. |
| B | FLEXIBLE DRUMS OR CONES MAY USED FOR SHORT TERM LANE CLOSURES (DAY TIME ONLY). FLEXIBLE DRUMS SHALL BE USED FOR LONG TERM (OVERNIGHT) CLOSURES. |
| C | SEE TABLE 6C-2 OF PART VI OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) FOR RECOMMENDED LENGTHS OF BUFFER SPACE WHICH ARE BASED ON STOPPING SIGHT DISTANCE AS A FUNCTION OF SPEED. |
| D | SEE TABLE 6C-1 OF PART VI OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) FOR GUIDELINES FOR ADVANCE WARNING SIGN SPACING TO BE USED TO DETERMINE DISTANCE FOR "ROAD WORK AHEAD" SIGN TO BE PLACED PRIOR TO INTERSECTION. |

❑ MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

LEFT LANE
CLOSURES
AT NEAR SIDE
OF INTERSECTIONS