


| CONST. NO. | | | |
|-------------|------|-----------|-------------------|
| PROJECT NO. | YEAR | SHEET NO. | |
| | 2010 | | |
| REVISIONS | | | |
| NO. | DATE | BY | BRIEF DESCRIPTION |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

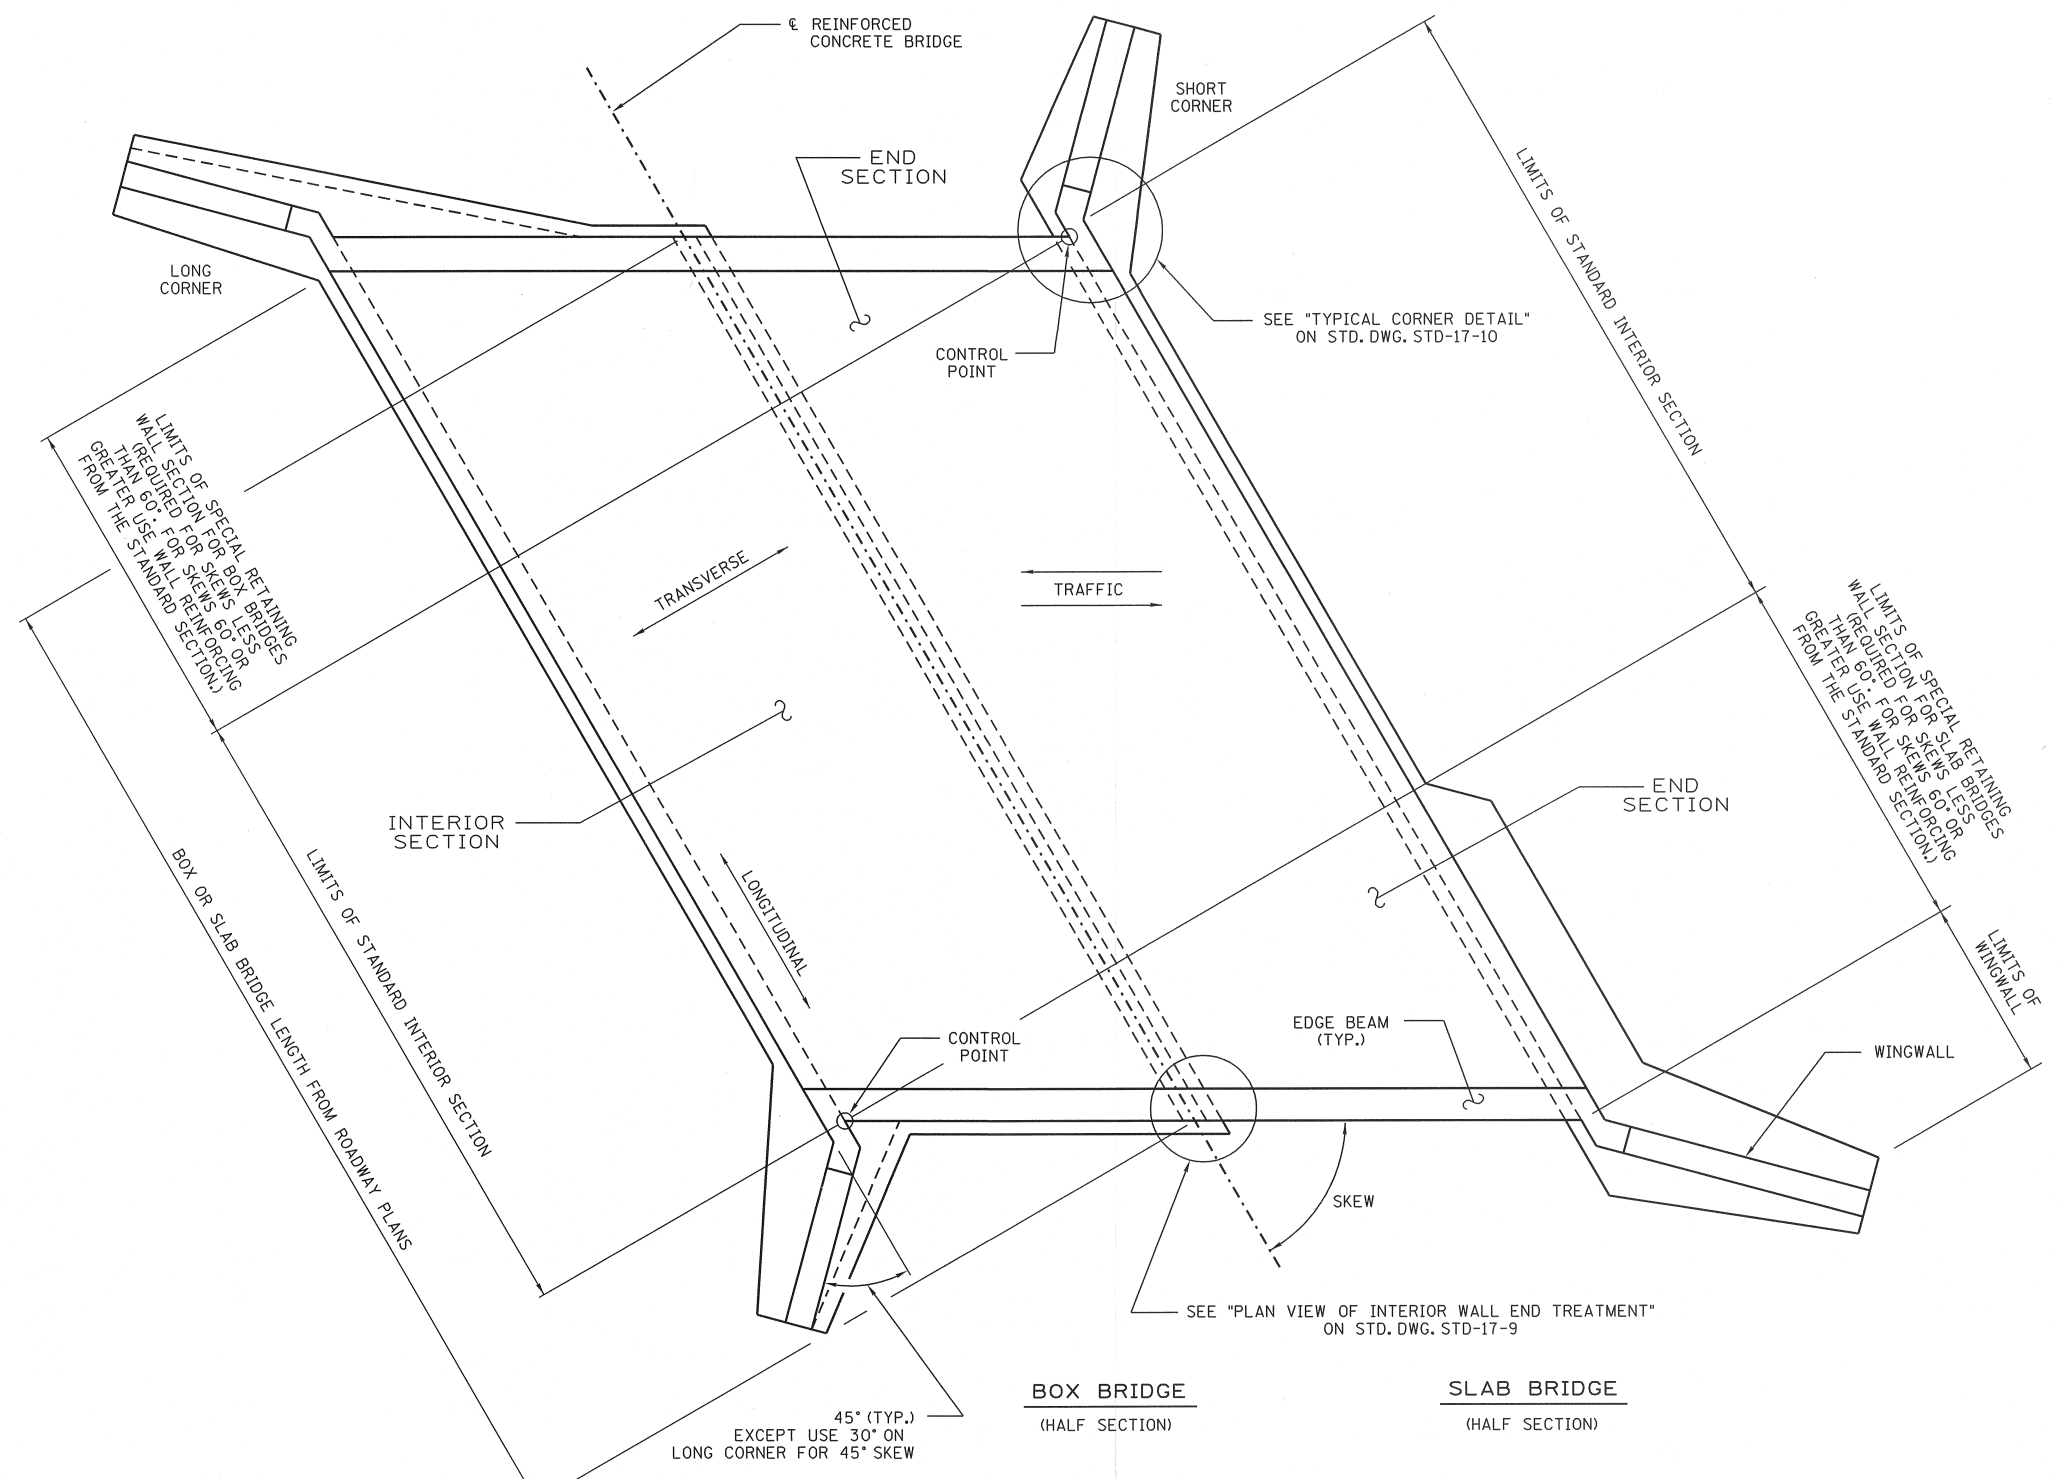

REINFORCED CONCRETE BRIDGE TERMINOLOGY

(2 BARREL SHOWN; 1 BARREL AND 3 BARREL SIMILAR)
(RIGHT SKEW SHOWN; LEFT SKEW OPPOSITE HAND)

CONTROL POINT: INTERSECTION OF OUTSIDE EDGE OF THE TOP OF THE CURB WITH THE INSIDE FACE OF THE EXTERIOR WALL.

SEE STD-17-15 AND 28 FOR SPECIAL RETAINING WALL SECTION DETAILS.

BOX BRIDGE
(HALF SECTION)

SLAB BRIDGE
(HALF SECTION)

45° (TYP.)
EXCEPT USE 30° ON
LONG CORNER FOR 45° SKEW

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
TERMINOLOGY OF DRAWINGS

**STANDARD REINFORCED
CONCRETE BRIDGE
BOX AND SLAB TYPE**

2010

CORRECT *Edward P. Wasserman*
ENGINEER OF STRUCTURES

DESIGNED BY CMH / MAH DATE 12-09
DRAWN BY DIANE BUSH DATE 04-10
SUPERVISED BY RLH / JWP / MAH DATE 12-09
CHECKED BY _____ DATE _____

D:\std171.dgn 1413