
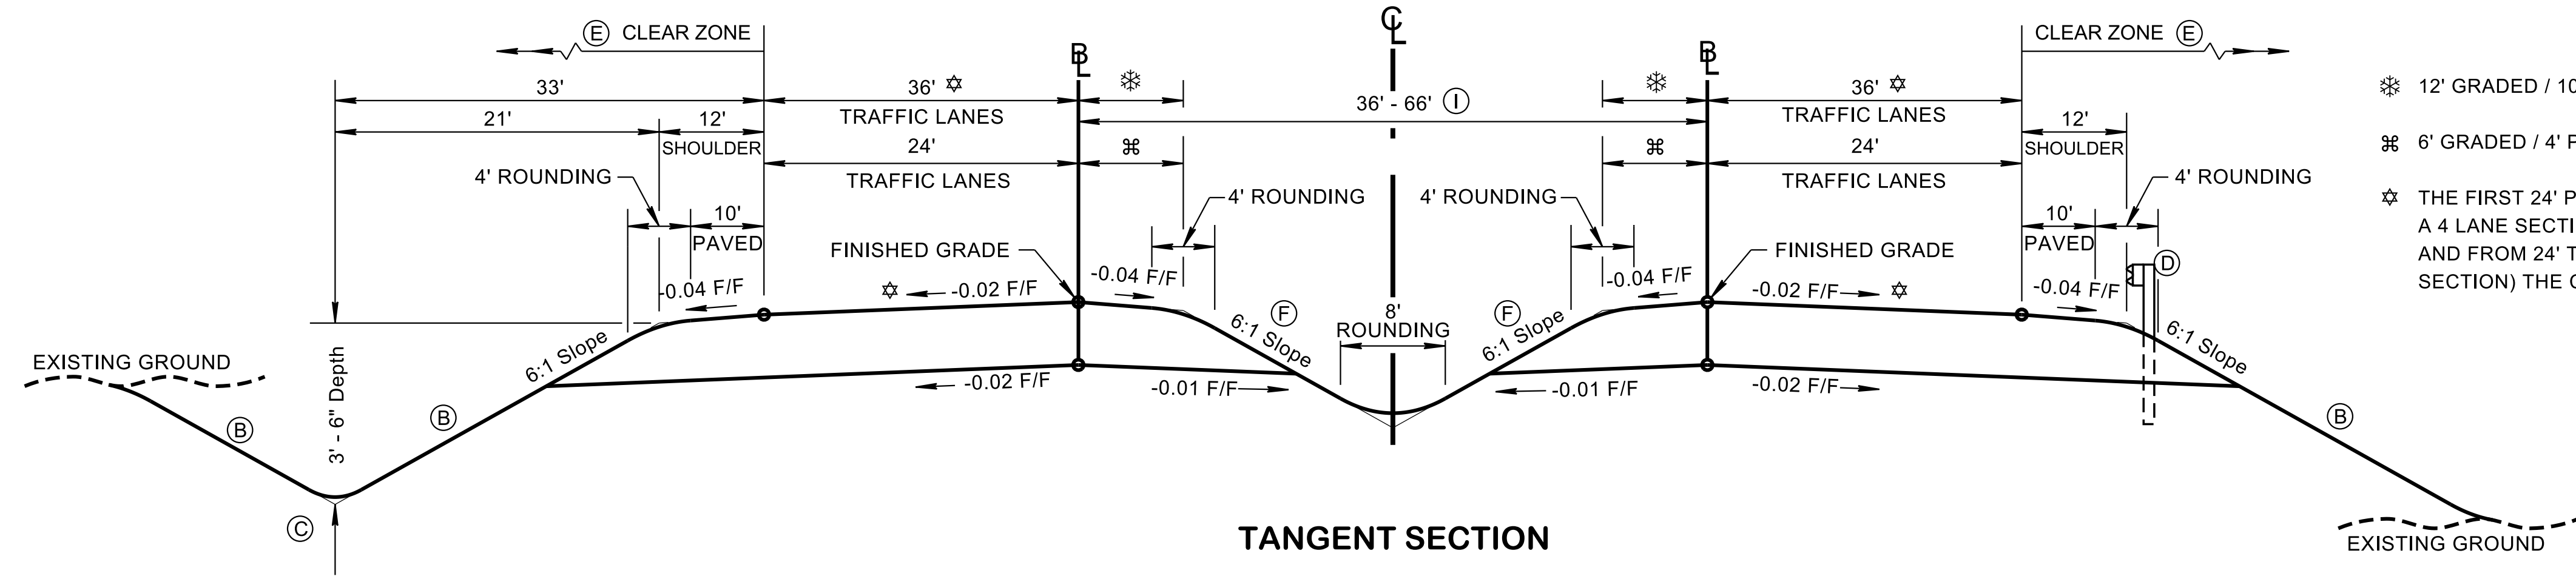


9/9/2019 11:30:00 AM P:\StandDraw\DESIGN STANDARDS\Standards Drawings Library\Standard Roadway Drawings - CURRENT\In Progress\100.00 Roadway Design Standards IP\100.03 RD11 Typical Sections and Design Criteria IP

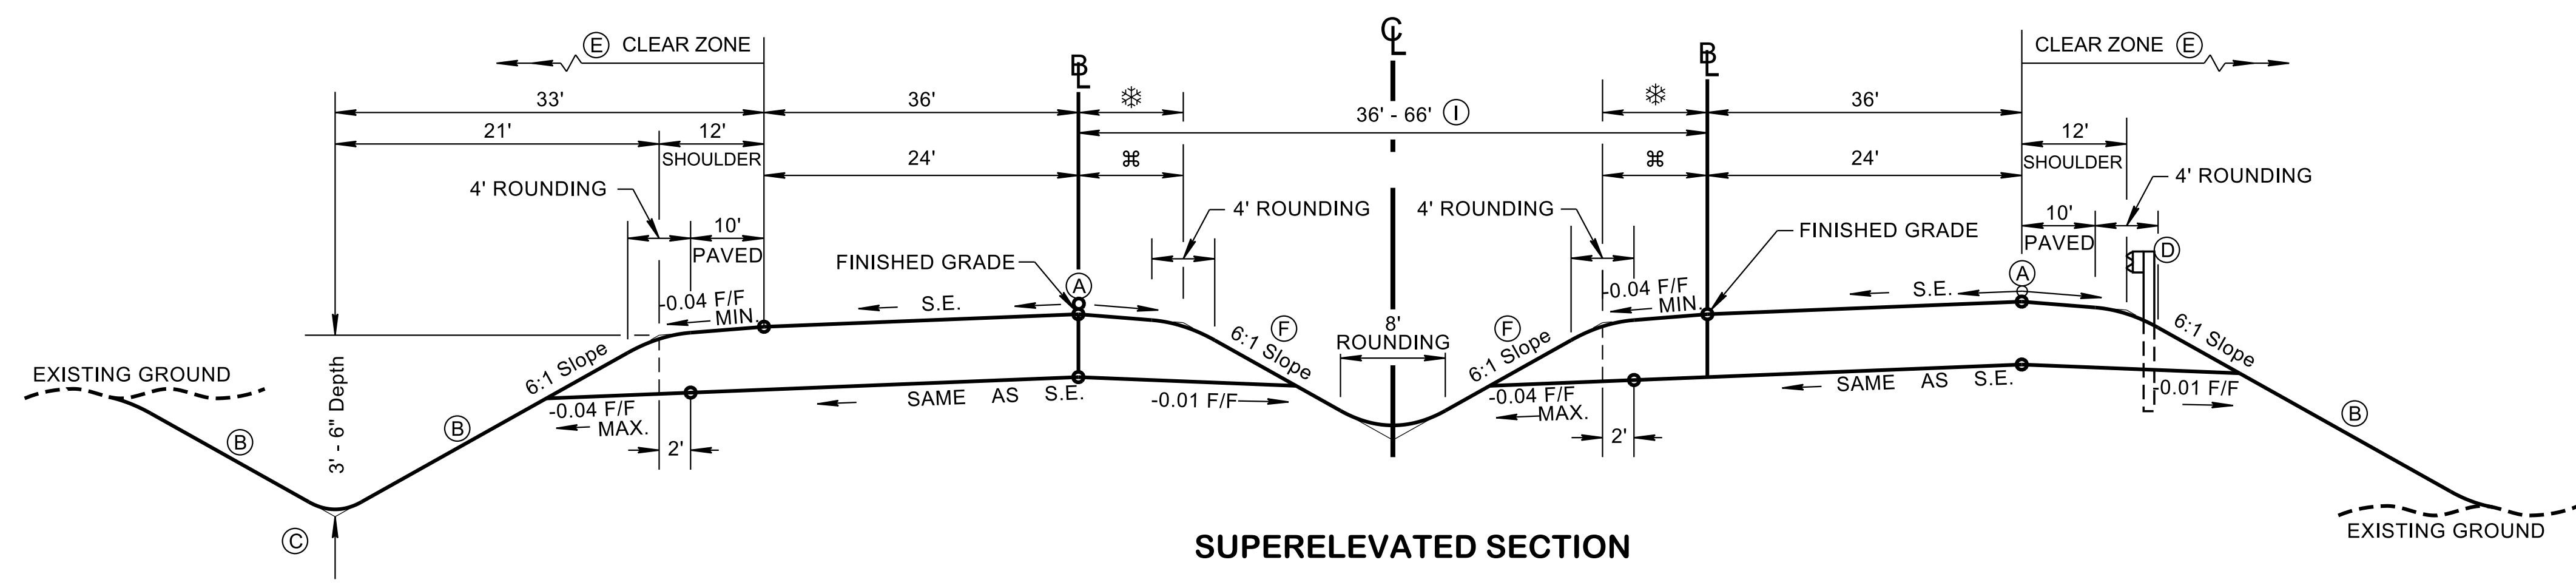

LEGEND

- ⊛ 12' GRADED / 10' PAVED SHOULDER
- ⊞ 6' GRADED / 4' PAVED SHOULDER
- ☆ THE FIRST 24' PAVEMENT (FIRST & SECOND LANE ON A 4 LANE SECTION) THE CROSS-SLOPE IS -0.020 FT/FT AND FROM 24' TO 36' (THE THIRD LANE ON A 6 LANE SECTION) THE CROSS-SLOPE IS -0.025 FT/FT.



**TABLE I
DESIGN SPEEDS FOR RURAL ARTERIAL ROADS (SEE PAGE 7-2) (H)**

TYPE OF TERRAIN	DESIGN SPEED (MPH)
LEVEL	60-70
ROLLING	50-60
MOUNTAINOUS	40-50

TABLE II 4 AND 6 LANE ARTERIAL - DESIGN STANDARDS (G)

DESIGN STANDARDS (FOR GIVEN DESIGN SPEED)	DESIGN SPEEDS (MPH)									REMARKS	
	30	35	40	45	50	55	60	65	70		
MINIMUM RADIUS (FEET) 0.04 MAX. S.E.	250	371	533	711	926	1190	1500			SEE PAGE 3-32	
MINIMUM RADIUS (FEET) 0.06 MAX. S.E.	231	340	485	643	833	1060	1330				
MINIMUM RADIUS (FEET) 0.08 MAX. S.E.	214	314	444	587	758	960	1200	1480	1810		
MAXIMUM RURAL GRADES %	LEVEL TERRAIN			5	5	4	4	3	3	3	SEE PAGE 7-4
	ROLLING TERRAIN			6	6	5	5	4	4	4	
	MOUNTAINOUS TERRAIN			8	7	7	6	6	5	5	
MAXIMUM URBAN GRADES %	LEVEL TERRAIN	8	7	7	6	6	5	5			SEE PAGE 7-29
	ROLLING TERRAIN	9	8	8	7	7	6	6			
	MOUNTAINOUS TERRAIN	11	10	10	9	9	8	8			
MINIMUM STOPPING SIGHT DISTANCE (FEET)	200	250	305	360	425	495	570	645	730	SEE PAGE 7-3	
MINIMUM "K" VALUE	CREST VERTICAL CURVE	19	29	44	61	84	114	151	193	247	SEE PAGE 3-155
	SAG VERTICAL CURVE	37	49	64	79	96	115	136	157	181	SEE PAGE 3-161

FOR SUPERELEVATION SEE STANDARD DRAWINGS RD11-SE SERIES

TABLE III MEDIAN WIDTHS

MINIMUM MEDIAN WIDTH (FT)	URBAN/RURAL	# LANES	SPEED (MPH)
36' MINIMUM	URBAN	4	35-55
	URBAN	6	35-55
48' MINIMUM	RURAL	4	40-70
66' MINIMUM	RURAL	6	40-70

DESIGN NOTES

- (A) THE SLOPE OF THE SHOULDER AND THE ROADWAY PAVEMENT SHOULD NOT EXCEED AN ALGEBRAIC DIFFERENCE OF 7%.
- (B) SEE STANDARD DRAWING RD11-S-11 FOR FILL AND CUT SLOPE TABLES, ROUNDING ON TOP OF CUT SLOPES, TOE OF FILL SLOPES AND SPECIAL ROCK TREATMENT.
- (C) SEE STANDARD DRAWING RD11-S-11A FOR ROUNDING OF ROADSIDE DITCH SLOPES.
- (D) SEE STANDARD DRAWING S-PL-6 FOR TYPICAL GUARDRAIL PLACEMENT.
- (E) SEE STANDARD DRAWING S-CZ-1 FOR CLEAR ZONE CRITERIA. SEE THE "ROADSIDE DESIGN GUIDE", AASHTO, 2011, FOR FURTHER INFORMATION REGARDING CLEAR ZONE.
- (F) 6:1 SLOPES ARE DESIRABLE. SLOPES RANGING BETWEEN 6:1 AND 4:1 MAY BE USED UNDER SPECIFIC ADVERSE CONDITIONS SUCH AS TO FACILITATE DRAINAGE OR TO ESTABLISH A LEFT TURN LANE.
- (G) ALTHOUGH THE SELECTED DESIGN SPEED ESTABLISHES THE LIMITING VALUES OF CURVE RADIUS AND MINIMUM SIGHT DISTANCE THAT SHOULD BE USED IN DESIGN, THERE SHOULD BE NO RESTRICTION ON THE USE OF FLATTER HORIZONTAL CURVES OR GREATER SIGHT DISTANCES WHERE SUCH IMPROVEMENTS CAN BE PROVIDED AS A PART OF AN ECONOMICAL DESIGN (SEE PAGE 2-55).
- (H) URBAN DESIGN SPEEDS ARE GENERALLY IN THE RANGE OF 30 TO 60 MILES PER HOUR (SEE PAGE 7-27).
- (I) SEE TABLE III FOR MEDIAN WIDTHS.

GENERAL NOTES

- (1) FOR SPECIFIC CONDITIONS NOT COVERED ON THIS SHEET, REFERENCE SHOULD BE MADE TO "A POLICY OF GEOMETRIC DESIGN OF HIGHWAYS AND STREETS" AASHTO, 2011 (GREEN BOOK).
- (2) PAGE NUMBERS REFERRED TO ON THIS DRAWING ARE FROM "A POLICY OF GEOMETRIC DESIGN OF HIGHWAYS AND STREETS" AASHTO, 2011 (GREEN BOOK), UNLESS OTHERWISE NOTED.
- (3) REFERENCE SHOULD ALSO BE MADE TO THE AASHTO "ROADSIDE DESIGN GUIDE," AASHTO, 2011.
- (4) DESIRABLE RIGHT-OF-WAY IS SLOPE LINES PLUS FIFTEEN FEET TO TWENTY FEET.
- (5) THE DESIGN OF BRIDGES, CULVERTS, WALLS, TUNNELS AND OTHER STRUCTURES SHALL BE IN ACCORDANCE WITH THE CURRENT AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, THE DESIGN LOADING SHOULD BE THE HL-93 CALIBRATED LIVE LOAD DESIGNATION.
- (6) FOR EXISTING BRIDGES TO REMAIN IN PLACE, THEY SHOULD HAVE ADEQUATE STRUCTURAL STRENGTH AND A WIDTH AT LEAST EQUAL TO THE WIDTH OF THE TRAVELED WAY PLUS 2 FEET CLEARANCE ON EACH SIDE. BRIDGES SHOULD BE CONSIDERED FOR ULTIMATE WIDENING OR REPLACEMENT IF THEY DO NOT PROVIDE AT LEAST HL-93 LIVE LOADING CAPACITY. AS AN INTERIM MEASURE, FOR NARROW BRIDGES, SPECIAL SIGNING AND DELINEATION TREATMENTS MAY BE CONSIDERED.
- (7) FOR ADDITIONAL URBAN DESIGN GUIDANCE AND CRITERIA, SEE PAGES 7-26 THROUGH 7-56.
- (8) MINIMUM PASSING SIGHT DISTANCE IS NOT APPLICABLE FOR FOUR AND SIX LANE DIVIDED HIGHWAYS.

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED

STATE OF TENNESSEE
STANDARD DRAWING
DEPARTMENT OF TRANSPORTATION

DESIGN STANDARDS FOR ARTERIAL HIGHWAYS WITH DEPRESSED MEDIAN (4 AND 6 LANE)

01-01-2019 RD11-TS-3A