


IF A THROUGH LANE BECOMES AN EXCLUSIVE LEFT TURN LANE, AN "ONLY" MESSAGE IS REQUIRED FOR EACH ARROW. THE "ONLY" MESSAGE SHALL BE PAID FOR UNDER ITEM NO. 716-03.01, PLASTIC WORD PAVEMENT MARKING (ONLY) PER EACH.


TYPICAL MARKING FOR LEFT TURN LANES  
ALSO APPLICABLE FOR RIGHT TURN LANES

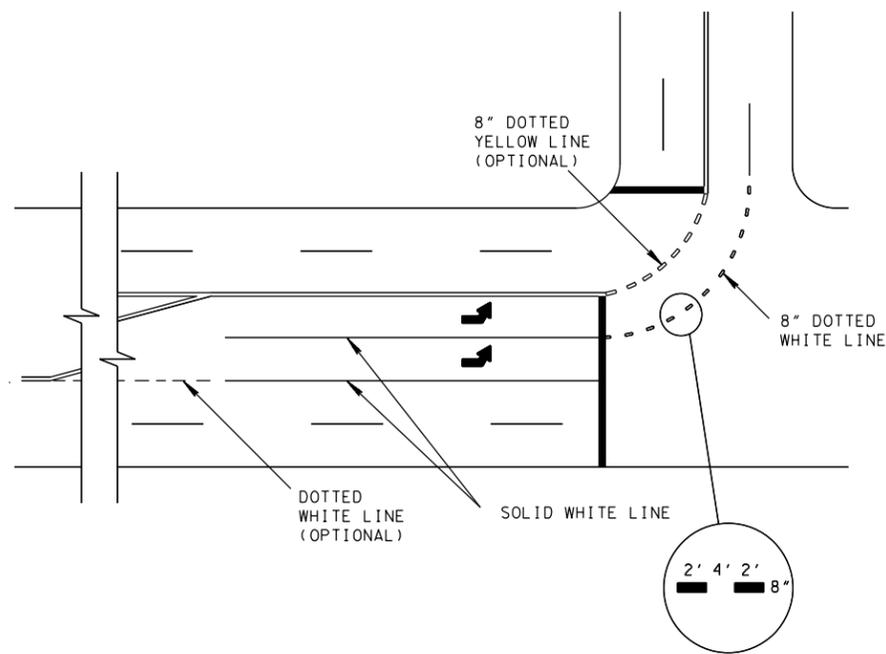

LEFT TURN ARROWS SHALL BE PAID FOR UNDER ITEM NO. 716-02.06, PLASTIC

716-02.08, PLASTIC PAVEMENT MARKING (8" DOTTED LINE) PER LINEAR FOOT.

TYPICAL MARKING FOR DOUBLE LEFT TURN LANES

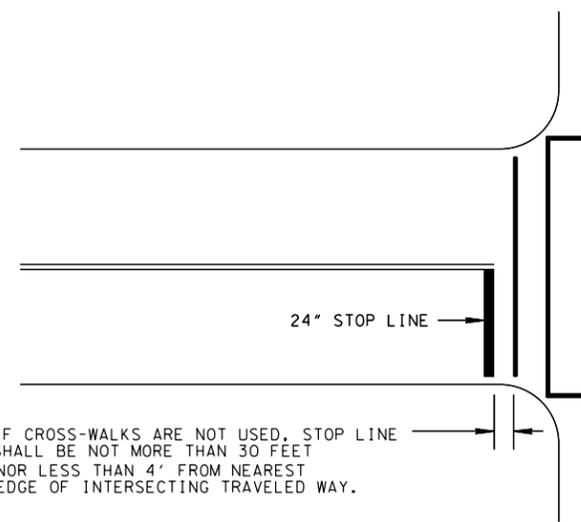


LOCATION SHALL BE DETERMINED BY VEHICLE TURNING PATHS FROM THE INTERSECTING ROADWAY, AND IF SIGNALIZED, ITS POSITION RELATIVE TO SIGNAL HEADS, PER MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

STOP LINES SHALL BE PAID FOR UNDER ITEM NO. 716-02.05, PLASTIC PAVEMENT MARKING (STOP LINE) PER LINEAR FOOT.

TYPICAL STOP LINE PLACEMENT

NOTE: STOP LINES REQUIRED ONLY ON APPROACHES CONTROLLED BY STOP SIGNS OR TRAFFIC SIGNALS.

- REV.3-15-07: REVISED TO REFER THE HANDICAP RAMP STANDARDS TO DETERMINE THE MINIMUM WIDTH OF CROSS WALK MARKINGS.
- REV.6-1-09: TYPICAL STOP LINE PLACEMENT NOTE REVISED.
- REV. 11-1-11: REVISED PAVEMENT MARKINGS FOR LEFT TURN DETAILS.
- REV. 7-24-14: REVISED CROSSWALK TO SHOW LONGITUDINAL LINES AS PREFERRED OPTION. ADDED PAVEMENT MARKING TABLE.
- REV. 2-22-88: REVISED DETAIL LEFT TURN LANE MARKING. ADDED NOTE FOR STOP LINE TO BE PARALLEL TO CROSS-WALK. NOTED LONGITUDINAL CROSS-WALK LINES TO BE WHITE. CHANGED DWG. NO. FROM T-M-11 TO T-M-4. ADDED DETAIL FOR DOUBLE LEFT TURN LANE.
- REV. 3-20-91: REDREW AND REORGANIZED SHEET. ADDED PAY ITEMS AND THEIR DESCRIPTIONS.
- REV. 5-27-01: CHANGED DESCRIPTION IN ITEM NO. 716-02.09.
- REV. 9-5-01: CHANGED DESCRIPTION IN ITEM NO. 716-02.03.
- REV.1-19-05: CHANGED HANDICAP RAMP DETAIL SHOWN ON CROSSWALK MARKING DETAILS.

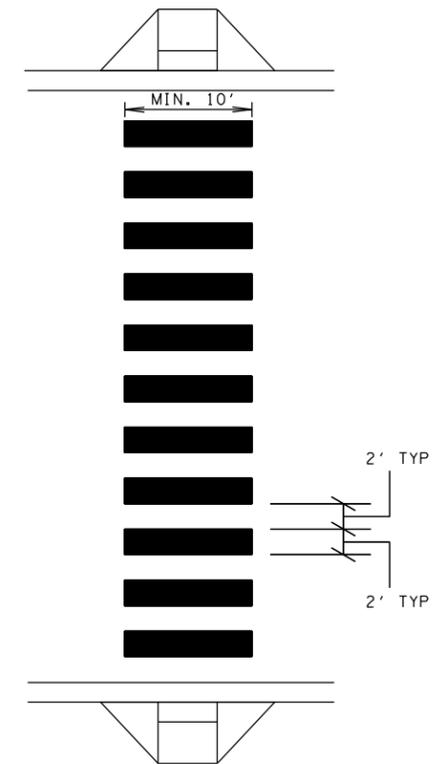

TYPICAL PLAN VIEW OF STANDARD CROSS WALK MARKING

CROSS-WALK MARKING WITH LONGITUDINAL LINES SHALL BE PAID FOR UNDER ITEM NO. 716-02.09, PLASTIC PAVEMENT MARKING (LONGITUDINAL CROSS-WALK) PER LINEAR FOOT. ALTERNATIVELY CROSSWALKS MAY BE MARKED BY TWO PARALLEL 8" SOLID WHITE LINES (716-02.12) SPACED A MINIMUM 6' APART.

SPECIAL PAVERS OR PAVEMENT TEXTURES DO NOT CONSTITUTE LEGAL CROSS WALK MARKINGS IN THIS CASE USE 8" PARALLEL SOLID WHITE LINE.

PAVEMENT MARKING TABLE		
DESIGN SPEED	EDGE LINE	LANE LINE
V ≥ 45 MPH	6" *	6"
V < 45 MPH	4"	4"

\* IF SHOULDER IS LESS THAN 2' WIDE USE 4" LINE

□ MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

STANDARD  
INTERSECTION  
PAVEMENT  
MARKINGS

T-M-4